

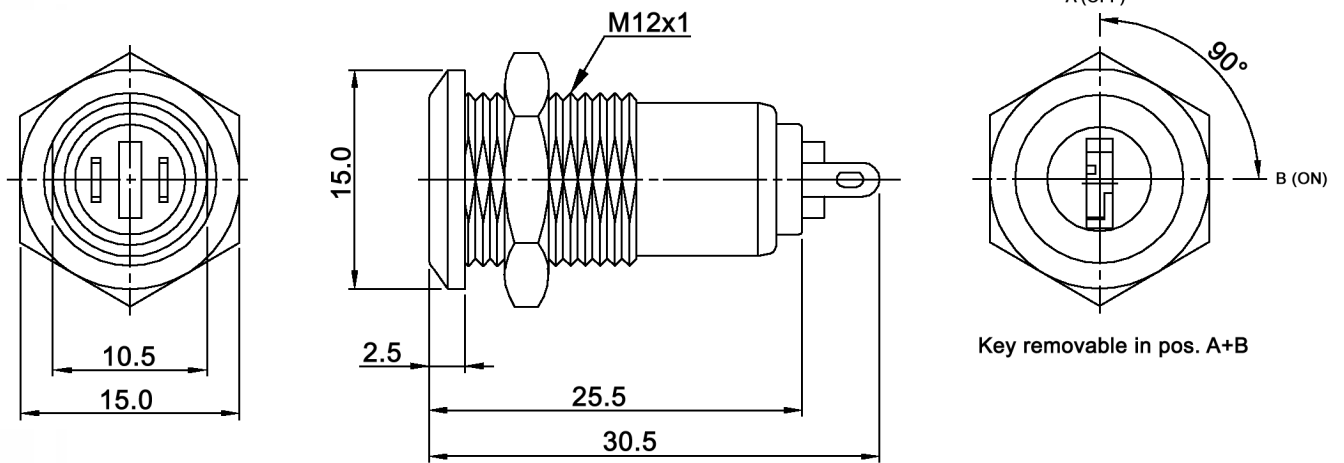


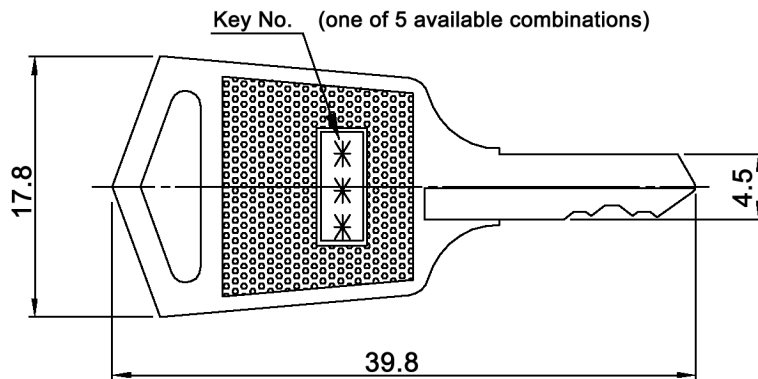

RECOMMENDED HOLE SIZE



Specifications:

Contact rating:	200 mA, 125 V AC
Contact resistance:	10 mOhm max.
Insulation resistance:	200 MOhm min.
Dielectric strength:	1000 V, 50 Hz for the duration of 1 minute
Operating temperature:	-20°C to +70°C
Mechanical life:	6 000 steps min.
Material:	Case: zinc alloy, chromium plated
	Contacts / terminals: silver plated
	Key: brass, nickel plated

Compliance: RohS III (2015/863/EU)

Tolerances: >0: ± 0.3 mm >6: ± 0.5 mm >30: ± 0.8 mm			Date	Name	MRK 1091 B-2	
			02/18	dr		
Specifications	09/22	dr	knitter-switch			Page
Electrical life	05/19	dr				
Modifications	Date	Name				1/1

30 40 14