

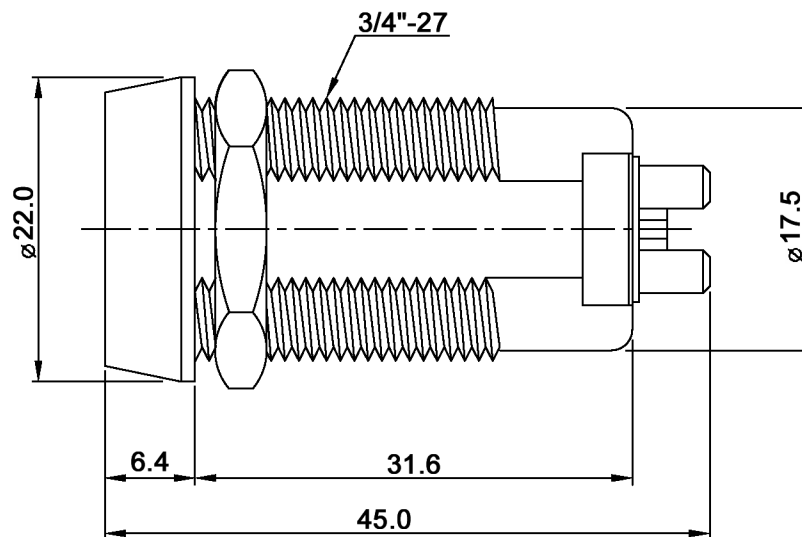



MRK 202-B

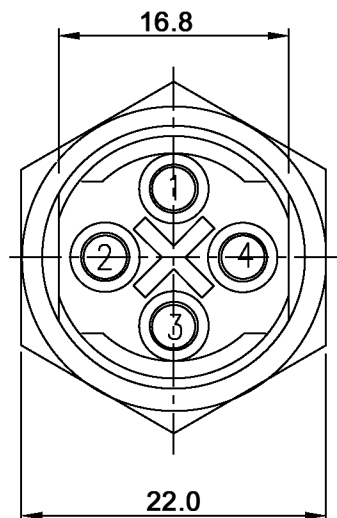


2 POS.:

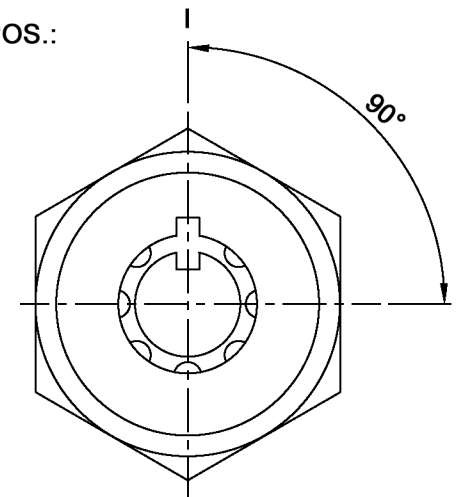

3 POS.:

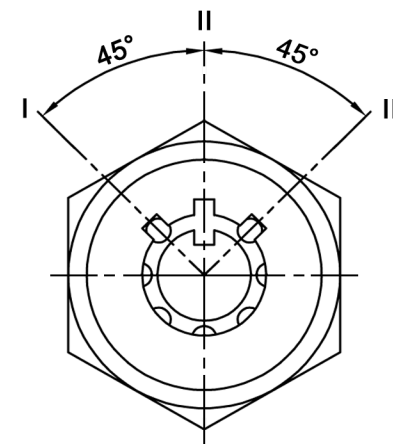

MRK 202-1, MRK 202-2, MRK 202-A

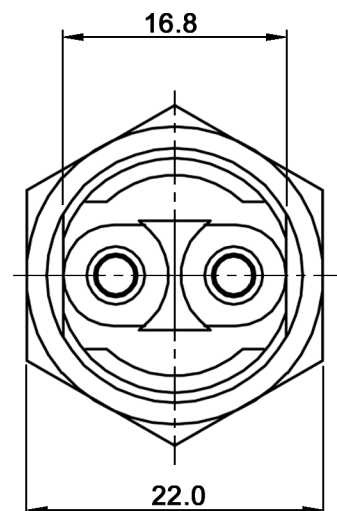

x	Switching function	Key removable in pos.
1	off - on	I
2	off - on	I, II
A	off - mom	I
B	on (1-3) - off - on (2-4)	I, II, III
DA	on (1-3) - mom (2-4)	I


Compliance: RohS III (2015/863/EU)

Tolerances: >0: ±0.3 mm >6: ±0.5 mm >30: ±0.8 mm			Date	Name	MRK 202-x	
			08/17	dr		
					30 39 21	
Revised	12/22	dr	knitter-switch			Page
Revised	08/20	dr				1/2
Modifications	Date	Name				


Specifications:

Contact rating: 2 A, 250 V AC; 4 A, 125 V AC
Contact resistance: 50 mOhm max.
Insulation resistance: 500 MOhm min.
Dielectric strength: 1500 V, 50 Hz for the duration of 1 minute
Operating temperature: -20°C to +70°C
Mechanical life: min. 10 000 steps
Material: Case: zinc alloy, chromium plated
Contacts / terminals: silver plated
Key: steel, nickel plated
Number of keys supplied: 2

APPEARANCE (EXAMPLE)

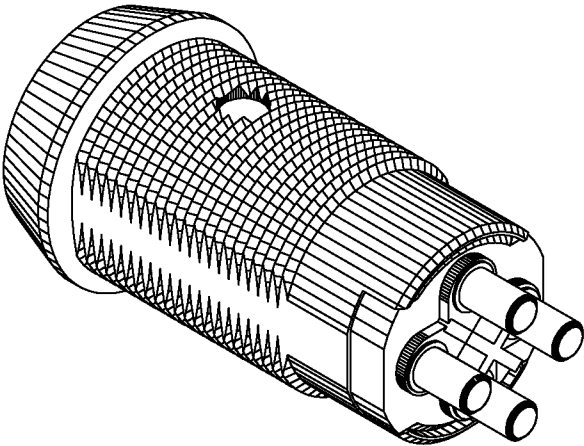

RECOMMENDED HOLE SIZE

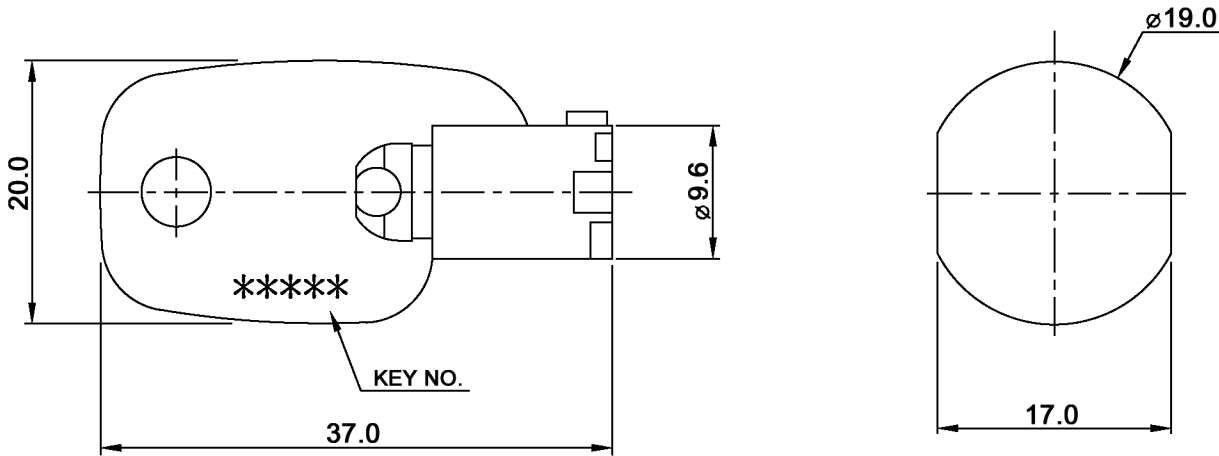

Compliance: RohS III (2015/863/EU)

Tolerances: >0: ±0.3 mm >6: ±0.5 mm >30: ±0.8 mm			Date	Name	MRK 202-x	
			08/17	dr		
Revised	12/22	dr	knitter-switch		30 39 21	Page
Revised	08/20	dr				2/2
Modifications	Date	Name				