


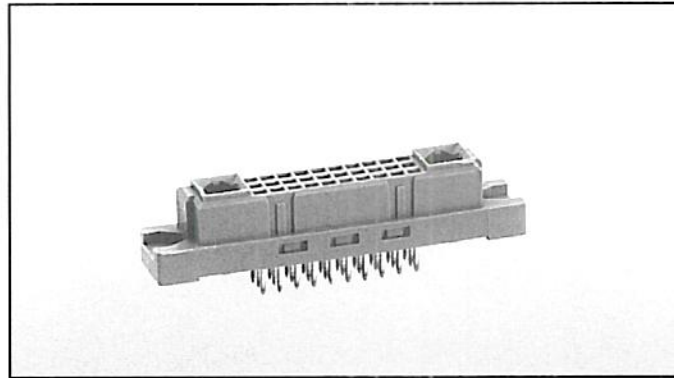
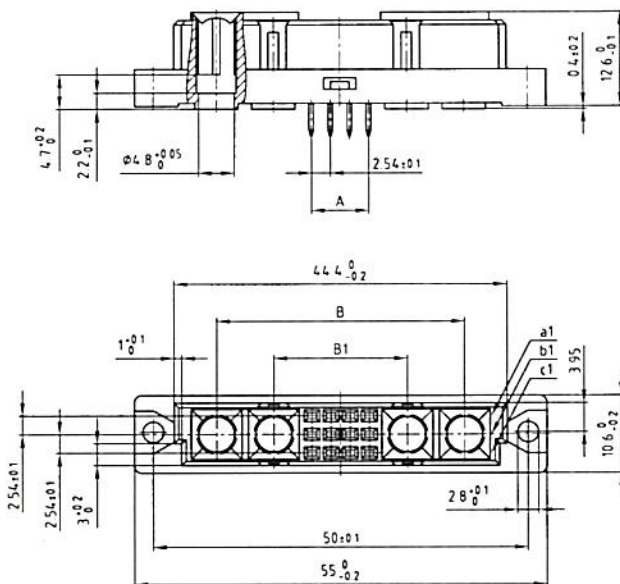




Female connector
contact spacing .100" and .200"
for signal contacts
Solder Technology
and wire wrap



No. of pos.	$A \pm 0.1$	$B \pm 0.1$	$B_1 \pm 0.1$
30+2	$9 \times 2.54 = 22.86$	$13 \times 2.54 = 33.02$	-
12+4	$3 \times 2.54 = 7.62$	$13 \times 2.54 = 33.02$	$7 \times 2.54 = 17.78$

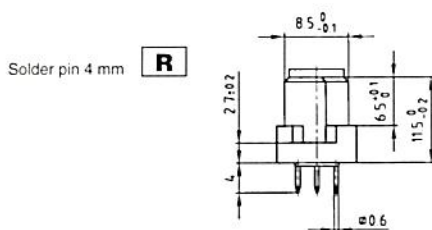

☐ = Ordering code

Kat 1 i 6GA

No. of Pos.	Version ● = contact / + = no contact
30+2	1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 a b c
20+2	1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 a b c
12+4	1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 a b c
8+4	1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 a b c

✓ 9020M2FBM99x90x