

THIS DRAWING FOR REFERENCE ONLY

DESIGNED & DIMENSIONED IN MILLIMETERS[INCHES]

DO NOT SCALE FROM THIS PRINT

ISDE-XX-D-L

No. OF POSITIONS (PER ROW)
 -05
 -10
 -15
 -20

LATCH
 ROW SPECIFICATION
 -D: DUAL




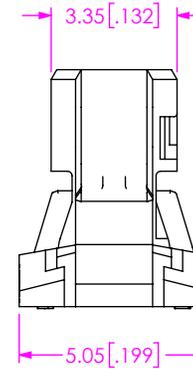


FIG 1
 ISDE-10-D-L SHOWN

No. OF POS	"A"	"B"	"C"
-05	9.50 [.374]	5.70 [.224]	9.30 [.366]
-10	13.50 [.531]	9.70 [.382]	13.30 [.524]
-15	17.50 [.689]	13.70 [.539]	17.30 [.681]
-20	21.50 [.846]	17.70 [.697]	21.30 [.839]

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS.
 TOLERANCES ARE:
 DECIMALS ANGLES
 X.X:
 X.XX:
 X.XXX:

PROPRIETARY NOTE
 THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.

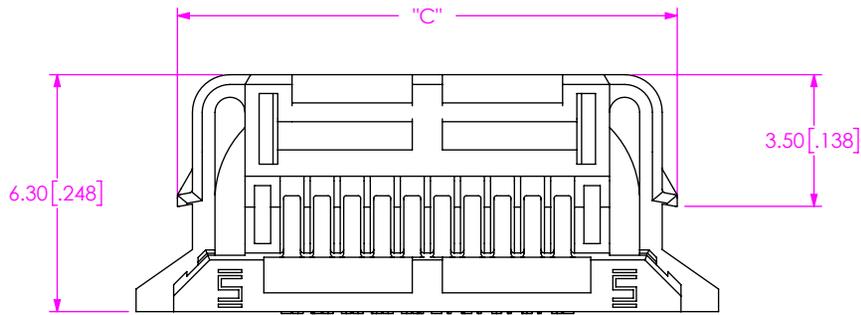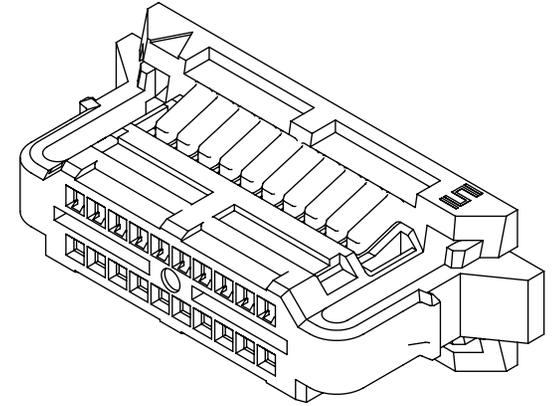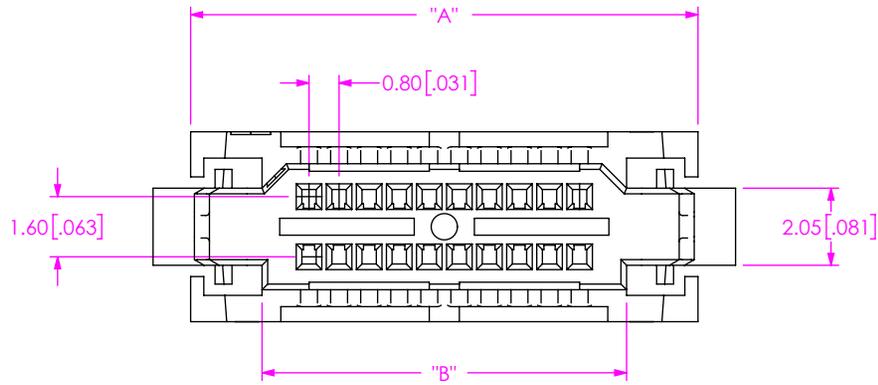

520 PARK EAST BLVD., NEW ALBANY, IN 47150
 PHONE: 812-944-6733 FAX: 812-948-5047
 e-Mail info@SAMTEC.com code 55322

MATERIAL: DO NOT SCALE DRAWING SHEET SCALE: 5:1
 NYLON UL94V-0, COLOR: NATURAL

DESCRIPTION:
 0.8MM SESD BODY

DWG. NO.
 ISDE-XX-D-L

BY: T NEWTON 7/28/2014 SHEET 1 OF 1

NOTES:
 1. ORDERS WILL BE PACKAGED ACCORDING TO THE SAMTEC PACKAGING EFFICIENCY STANDARDS (SPES) FOUND ON WWW.SAMTEC.COM