





DIN Rail terminal blocks / DK series

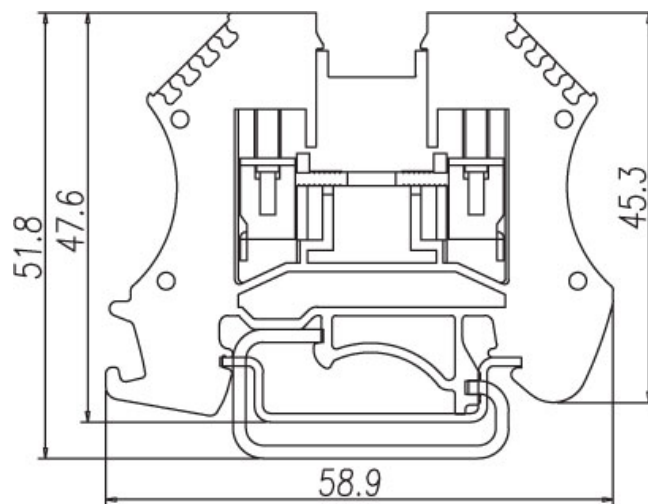

DK2.5

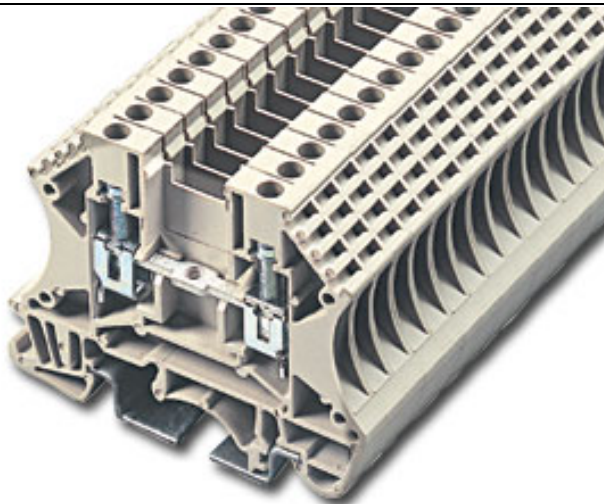

Approval	 	
Technical Data	UL	IEC
Rated voltage	600	630
Rated current	25A	24A
Conductor cross-section, solid (AWG / mm ²)	22~12 / 0.5~2.5	
Conductor cross-section, flexible (AWG / mm ²)	22~12 / 0.5~2.5	
Rated impulse withstand voltage	8KV	
Torque (N-m)	0.8	
Screw	M3	
Wire strip length	10~12mm	
Insulating material	PA	
TxHxW (mm)	5.1 x 47.6 x 58.9	
Optional color	Cat. No.	
	DK2.5-RD	
	DK2.5-BL	
	DK2.5-BK	
	DK2.5-OR	



	Accessories	Cat. No.
End cover		DK2.5C
Partition		DKSPS-002
Small partition		DKSPS-001
Insertion bridge	2 way	
	3 way	
	4 way	
	10 way	
Insertion bridge	2 way	CSC-2.502
	3 way	CSC-2.503
	4 way	CSC-2.504
	10 way	CSC-2.510
Screw-on bridge	2 way	DS2.5-02P
	3 way	DS2.5-03P
	4 way	DS2.5-04P
	10 way	DS2.5-03P
Marking label		TM26
Mounting Rail		TS-35 / TS-32
Tool		0.4 x 2.5mm