



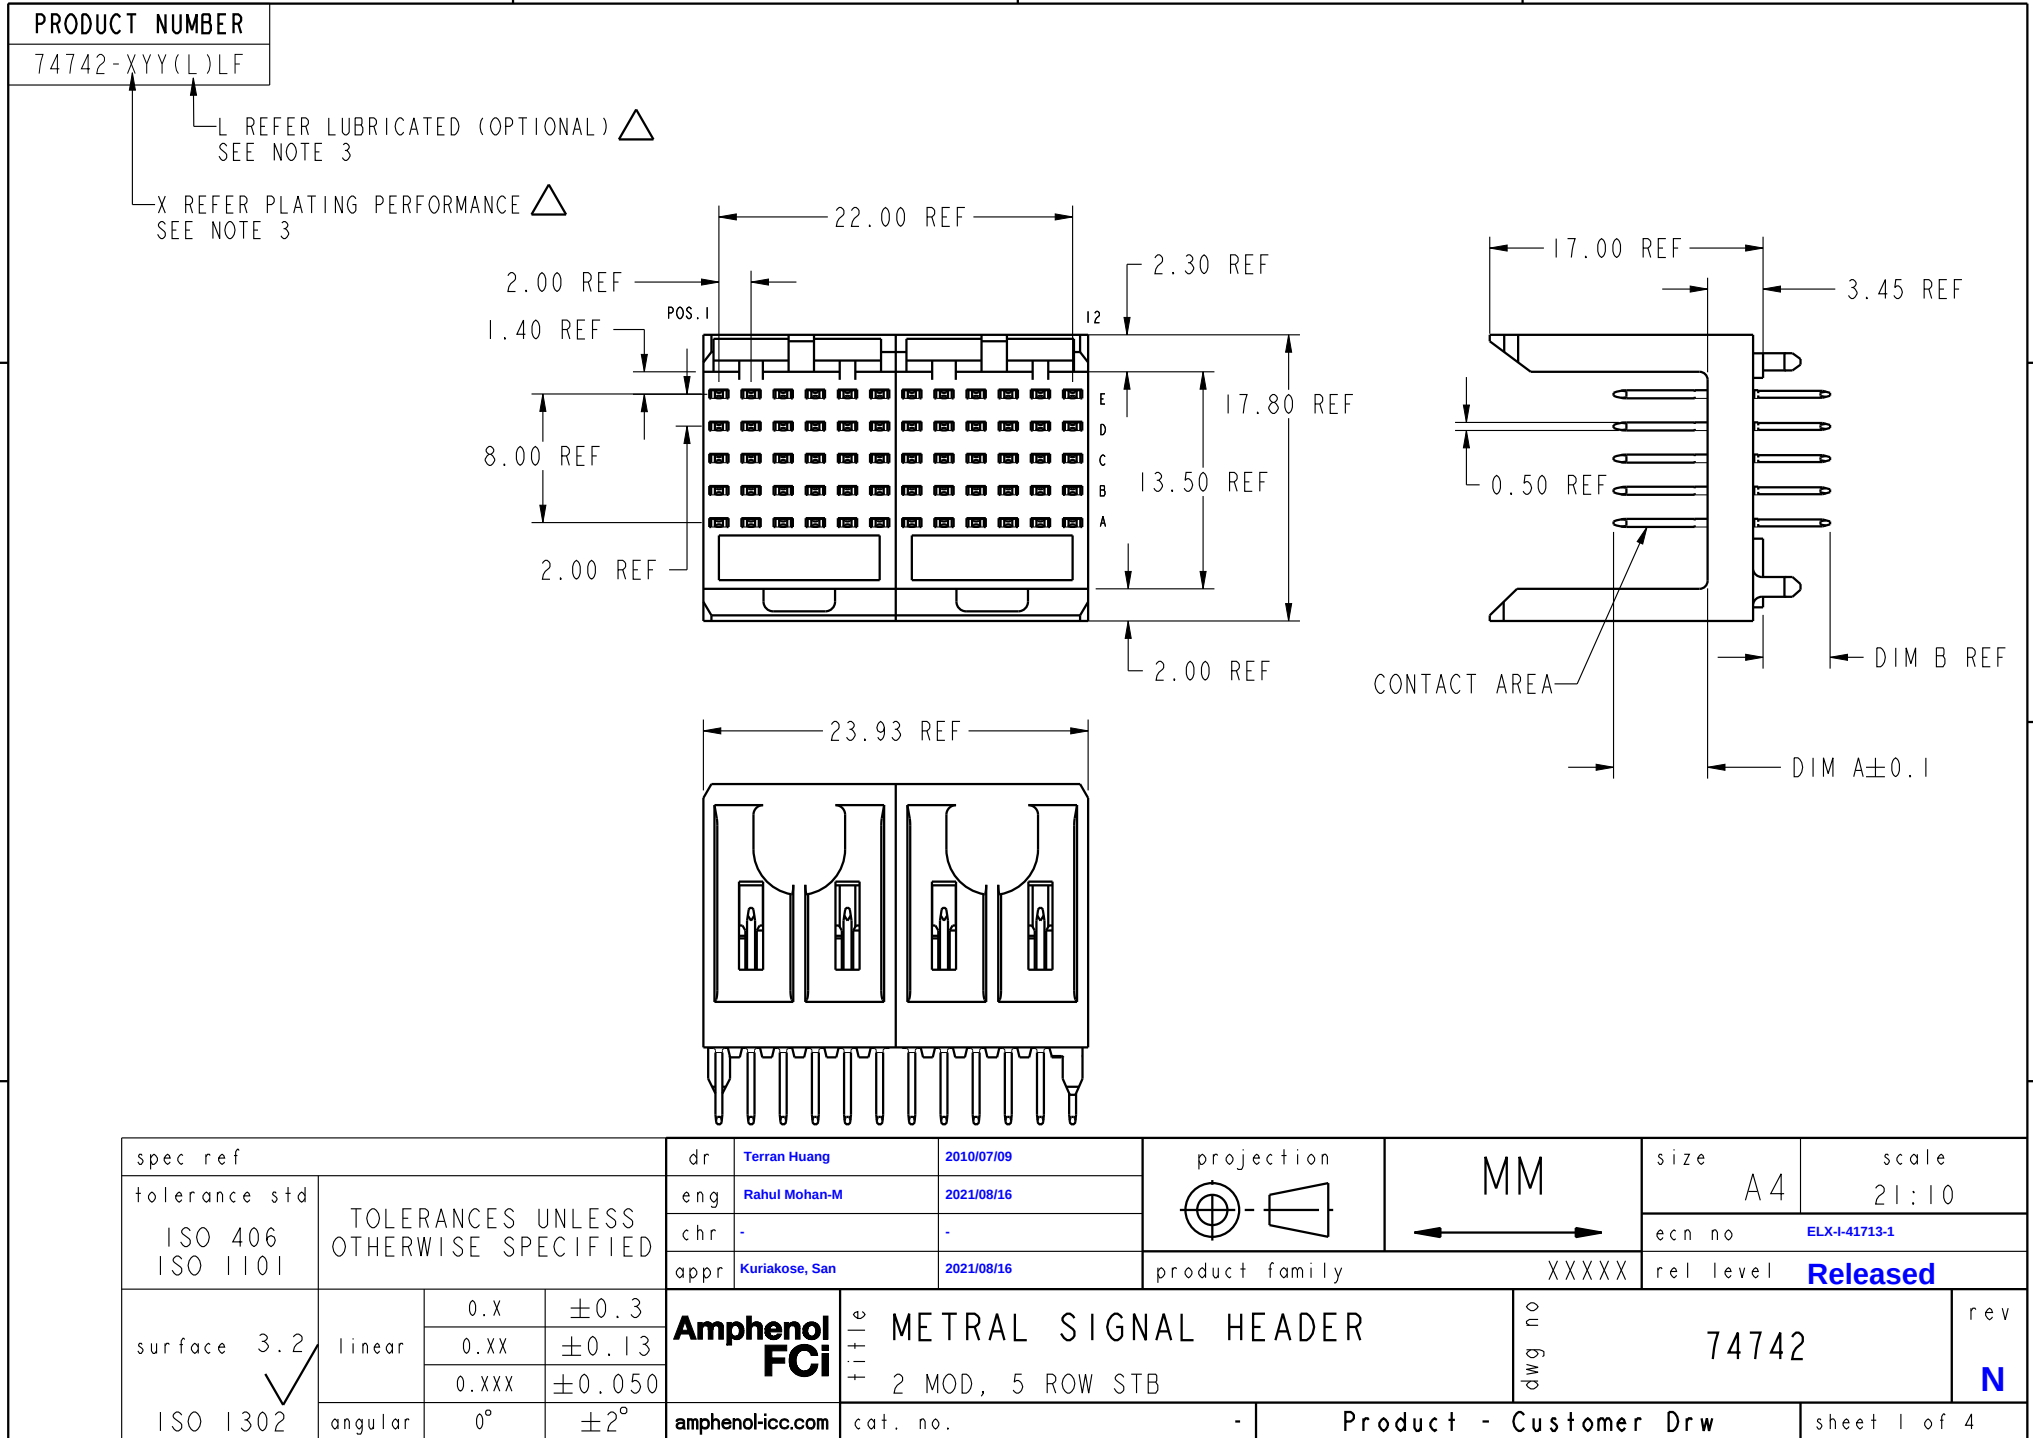

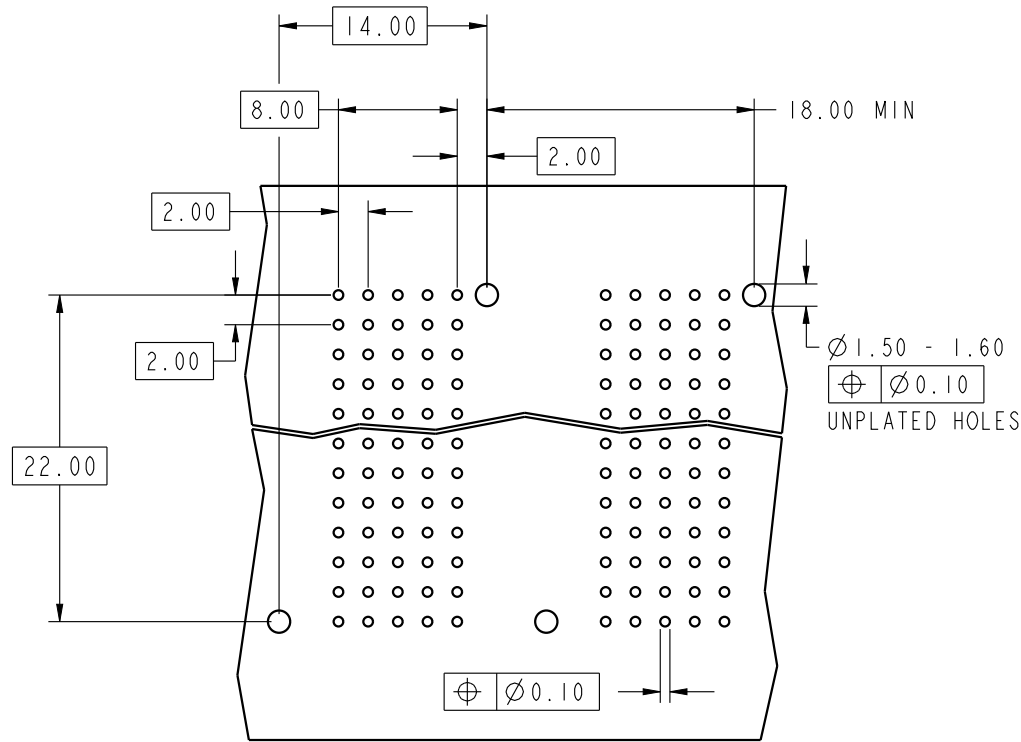

KEY (SIGNAL STB)		
CODE	DIMENSIONS	
	DIM "A" MATE	DIM "B" TAIL
1	5.00	4.25
2	5.75	4.25
3	6.50	4.25
4	7.25	4.25
5	5.00	3.30
6	5.75	3.30
7	6.50	3.30
8	7.25	3.30
9	5.00	2.65
10	5.75	2.65
11	6.50	2.65
12	6.50	2.65
13	8.00	4.25

REQUIRED PC BOARD LAYOUT
COMPONENT SIDE

SEE PRINT 58351 FOR
ADDITIONAL PCB INFORMATION

spec ref		dr		Terran Huang	2010/07/09	projection 	MM 	size	A4	scale	11:10		
tolerance std ISO 406 ISO 1101	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Rahul Mohan-M			2021/08/16	ecn no				ELX-I-41713-1
				chr	-			-	rel level				Released
		appr	Kuriakose, San	2021/08/16	product family			XXXXX					
surface 3.2 ISO 1302	linear	0.X	±0.3	Amphenol FCI	title METRAL SIGNAL HEADER 2 MOD, 5 ROW STB			dwg no	74742			rev N	
		0.XX	±0.13										
		0.XXX	±0.050										
	angular	0°	±2°	amphenol-icc.com	cat. no.			-	Product - Customer Drw			sheet 2 of 4	

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2						
		1	2	3	4	5	6	7	8	9	10	11	12
74742-X01LF	E	3	3	3	3	3	3	3	3	3	3	3	3
	D	3	3	3	3	3	3	3	3	3	3	3	3
	C	3	3	3	3	3	3	3	3	3	3	3	3
	B	3	3	3	3	3	3	3	3	3	3	3	3
	A	3	3	3	3	3	3	3	3	3	3	3	3

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2						
		1	2	3	4	5	6	7	8	9	10	11	12
74742-X05LF	E	3	3	3	3	3	3	3	3	3	3	3	3
	D	3	3	3	3	3	3	3	3	3	3	3	3
	C	4	4	4	4	4	4	4	4	4	4	4	4
	B	13	13	13	13	13	13	13	13	13	13	13	13
	A	13	13	13	13	13	13	13	13	13	13	13	13

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2						
		1	2	3	4	5	6	7	8	9	10	11	12
74742-X09LF	E	13	13	13	13	13	13	13	13	13	13	13	13
	D	13	13	13	13	13	13	13	13	13	13	13	13
	C	13	13	13	13	13	13	13	13	13	13	13	13
	B	13	13	13	13	13	13	13	13	13	13	13	13
	A	13	13	13	13	13	13	13	13	13	13	13	13

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2						
		1	2	3	4	5	6	7	8	9	10	11	12
74742-X34LF	E	6	6	6	6	6	6	6	6	6	6	6	6
	D	7	7	7	7	7	7	7	7	7	7	7	7
	C	6	6	6	6	6	6	6	6	6	6	6	6
	B	6	6	6	6	6	6	6	6	6	6	6	6
	A	7	7	7	7	7	7	7	7	7	7	7	7

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2						
		1	2	3	4	5	6	7	8	9	10	11	12
74742-X02LF	E	1	1	1	1	1	1	1	1	1	1	1	1
	D	1	1	1	1	1	1	1	1	1	1	1	1
	C	1	1	1	1	1	1	1	1	1	1	1	1
	B	1	1	1	1	1	1	1	1	1	1	1	1
	A	3	3	3	3	3	3	3	3	3	3	3	3

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2						
		1	2	3	4	5	6	7	8	9	10	11	12
74742-X06LF	E	3	3	3	3	3	3	3	3	3	3	3	3
	D	3	3	3	3	3	3	3	3	3	3	3	3
	C	3	3	3	3	3	3	3	3	3	3	3	3
	B	13	13	13	13	13	13	13	13	13	13	13	13
	A	3	3	3	3	3	3	3	3	3	3	3	3

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2						
		1	2	3	4	5	6	7	8	9	10	11	12
74742-X31LF	E	7	7	7	7	7	7	7	7	7	7	7	7
	D	7	7	7	7	7	7	7	7	7	7	7	7
	C	7	7	7	7	7	7	7	7	7	7	7	7
	B	7	7	7	7	7	7	7	7	7	7	7	7
	A	7	7	7	7	7	7	7	7	7	7	7	7

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2						
		1	2	3	4	5	6	7	8	9	10	11	12
74742-X35LF	E	6	6	6	6	6	6	6	6	6	6	6	6
	D	6	6	6	6	6	6	6	6	6	6	6	6
	C	6	6	6	6	6	6	6	6	6	6	6	6
	B	8	8	8	8	8	8	8	8	8	8	8	8
	A	6	6	6	6	6	6	6	6	6	6	6	6

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2						
		1	2	3	4	5	6	7	8	9	10	11	12
74742-X03LF	E	2	2	2	2	2	2	2	2	2	2	2	2
	D	3	3	3	3	3	3	3	3	3	3	3	3
	C	2	2	2	2	2	2	2	2	2	2	2	2
	B	2	2	2	2	2	2	2	2	2	2	2	2
	A	3	3	3	3	3	3	3	3	3	3	3	3

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2						
		1	2	3	4	5	6	7	8	9	10	11	12
74742-X07LF	E	2	2	2	2	2	2	2	2	2	2	2	2
	D	2	2	2	2	2	2	2	2	2	2	2	2
	C	2	2	2	2	2	2	2	2	2	2	2	2
	B	2	2	2	2	2	2	2	2	2	2	2	2
	A	2	2	2	2	2	2	2	2	2	2	2	2

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2						
		1	2	3	4	5	6	7	8	9	10	11	12
74742-X32LF	E	5	5	5	5	5	5	5	5	5	5	5	5
	D	5	5	5	5	5	5	5	5	5	5	5	5
	C	5	5	5	5	5	5	5	5	5	5	5	5
	B	5	5	5	5	5	5	5	5	5	5	5	5
	A	5	5	5	5	5	5	5	5	5	5	5	5

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2						
		1	2	3	4	5	6	7	8	9	10	11	12
74742-X36LF	E	6	6	6	6	6	6	6	6	6	6	6	6
	D	6	6	6	6	6	6	6	6	6	6	6	6
	C	6	6	6	6	6	6	6	6	6	6	6	6
	B	6	6	6	6	6	6	6	6	6	6	6	6
	A	6	6	6	6	6	6	6	6	6	6	6	6

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2						
		1	2	3	4	5	6	7	8	9	10	11	12
74742-X04LF	E	2	2	2	2	2	2	2	2	2	2	2	2
	D	2	2	2	2	2	2	2	2	2	2	2	2
	C	2	2	2	2	2	2	2	2	2	2	2	2
	B	4	4	4	4	4	4	4	4	4	4	4	4
	A	2	2	2	2	2	2	2	2	2	2	2	2

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2						
		1	2	3	4	5	6	7	8	9	10	11	12
74742-X08LF	E	4	4	4	4	4	4	4	4	4	4	4	4
	D	4	4	4	4	4	4	4	4	4	4	4	4
	C	4	4	4	4	4	4	4	4	4	4	4	4
	B	4	4	4	4	4	4	4	4	4	4	4	4
	A	4	4	4	4	4	4	4	4	4	4	4	4

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2						
		1	2	3	4	5	6	7	8	9	10	11	12
74742-X33LF	E	5	5	5	5	5	5	5	5	5	5	5	5
	D	5	5	5	5	5	5	5	5	5	5	5	5
	C	5	5	5	5	5	5	5	5	5	5	5	5
	B	5	5	5	5	5	5	5	5	5	5	5	5
	A	7	7	7	7	7	7	7	7	7	7	7	7

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2						
		1	2	3	4	5	6	7	8	9	10	11	12
74742-X37LF	E	8	8	8	8	8	8	8	8	8	8	8	8
	D	8	8	8	8	8	8	8	8	8	8	8	8
	C	8	8	8	8	8	8	8	8	8	8	8	8
	B	8	8	8	8	8	8	8	8	8	8	8	8
	A	8	8	8	8	8	8	8	8	8	8	8	8

spec ref		dr		Terran Huang		2010/07/09		projection	MM	size		A4		scale		11:10					
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng		Rahul Mohan-M		2021/08/16				ecn no		ELX-I-41713-1									
		chr		-		-				rel level		Released									
ISO 406 ISO 1101		appr		Kuriakose, San		2021/08/16		product family				XXXXX									
surface 3.2 	linear	0.X		±0.3		Amphenol FCI title METRAL SIGNAL HEADER 2 MOD, 5 ROW STB				dwg no 74742				rev		N					
		0.XX		±0.13																	
		0.XXX		±0.050																	
ISO 1302		angular		0°		±2°		amphenol-icc.com				cat. no.		-		Product - Customer Drw				sheet 3 of 4	

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
74742-X61LF	E	11	11	11	11	11	11	11	11	11	11
	D	11	11	11	11	11	11	11	11	11	11
	C	11	11	11	11	11	11	11	11	11	11
	B	11	11	11	11	11	11	11	11	11	11
	A	11	11	11	11	11	11	11	11	11	11

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
74742-X65LF	E	10	10	10	10	10	10	10	10	10	10
	D	10	10	10	10	10	10	10	10	10	10
	C	10	10	10	10	10	10	10	10	10	10
	B	12	12	12	12	12	12	12	12	12	12
	A	10	10	10	10	10	10	10	10	10	10

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
74742-X62LF	E	9	9	9	9	9	9	9	9	9	9
	D	9	9	9	9	9	9	9	9	9	9
	C	9	9	9	9	9	9	9	9	9	9
	B	9	9	9	9	9	9	9	9	9	9
	A	9	9	9	9	9	9	9	9	9	9

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
74742-X66LF	E	10	10	10	10	10	10	10	10	10	10
	D	10	10	10	10	10	10	10	10	10	10
	C	10	10	10	10	10	10	10	10	10	10
	B	10	10	10	10	10	10	10	10	10	10
	A	10	10	10	10	10	10	10	10	10	10

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
74742-X63LF	E	9	9	9	9	9	9	9	9	9	9
	D	9	9	9	9	9	9	9	9	9	9
	C	9	9	9	9	9	9	9	9	9	9
	B	9	9	9	9	9	9	9	9	9	9
	A	11	11	11	11	11	11	11	11	11	11


METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
74742-X67LF	E	12	12	12	12	12	12	12	12	12	12
	D	12	12	12	12	12	12	12	12	12	12
	C	12	12	12	12	12	12	12	12	12	12
	B	12	12	12	12	12	12	12	12	12	12
	A	12	12	12	12	12	12	12	12	12	12

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
74742-X64LF	E	10	10	10	10	10	10	10	10	10	10
	D	11	11	11	11	11	11	11	11	11	11
	C	10	10	10	10	10	10	10	10	10	10
	B	10	10	10	10	10	10	10	10	10	10
	A	11	11	11	11	11	11	11	11	11	11

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
74742-X99LF	E	3	3	3	3	3	3	3	3	3	13
	D	3	3	3	3	3	3	3	3	3	13
	C	3	3	3	3	3	3	3	3	3	13
	B	3	3	3	3	3	3	3	3	3	13
	A	1	3	3	3	3	3	3	3	3	13

NOTES:

- FOR DIM A, AND B SEE SHEET 2 AND UP.
- MATERIAL : BODY : THERMOPLASTIC UL94-V0.
: CONTACT : COPPER ALLOY.
- FOR PLATING PERFORMANCE REFER DRAWING # 10159408.
- ALL PRODUCTS WITH PART NUMBERS SHOWN IN SUBSEQUENT TABLES WILL BE PACKAGED IN TUBES. IF TRAY PACKAGING IS REQUIRED, SUFFIX "P" WILL BE ADDED TO THE END OF THE PART NUMBER.
EXAMPLE: 74742-XXXPLF
- PRODUCT SPECIFICATION GS-12-180
- APPLICATION SPECIFICATION BUS-20-074
- THE PRODUCTS MEET THE EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-47-0004.
- ALL PRODUCTS WILL WITHSTAND EXPOSURE TO 260° C FOR 60 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN. THE Au CONTACT SURFACE OF THE CONTACTS SHALL BE EXPOSED TO A MAXIMUM OF 140° C FOR NO LONGER THAN 15 SECONDS IN A WAVE SOLDER APPLICATION.
- A  SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.

spec ref	dr	Terran Huang	2010/07/09	projection		size	A4	scale	1:10
tolerance std	eng	Rahul Mohan-M	2021/08/16			ecn no	ELX-I-41713-1		
ISO 406	chr	-	-			rel level	Released		
ISO 1101	appr	Kuriakose, San	2021/08/16	product family	XXXXX				
surface 3.2						dwg no	74742	rev	N
linear									
angular									
0.X									
±0.3									
0.XX									
±0.13									
0.XXX									
±0.050									
0°									
±2°									
Amphenol FCi	cat. no.	-		Product - Customer Drw		sheet 4 of 4			
amphenol-icc.com									