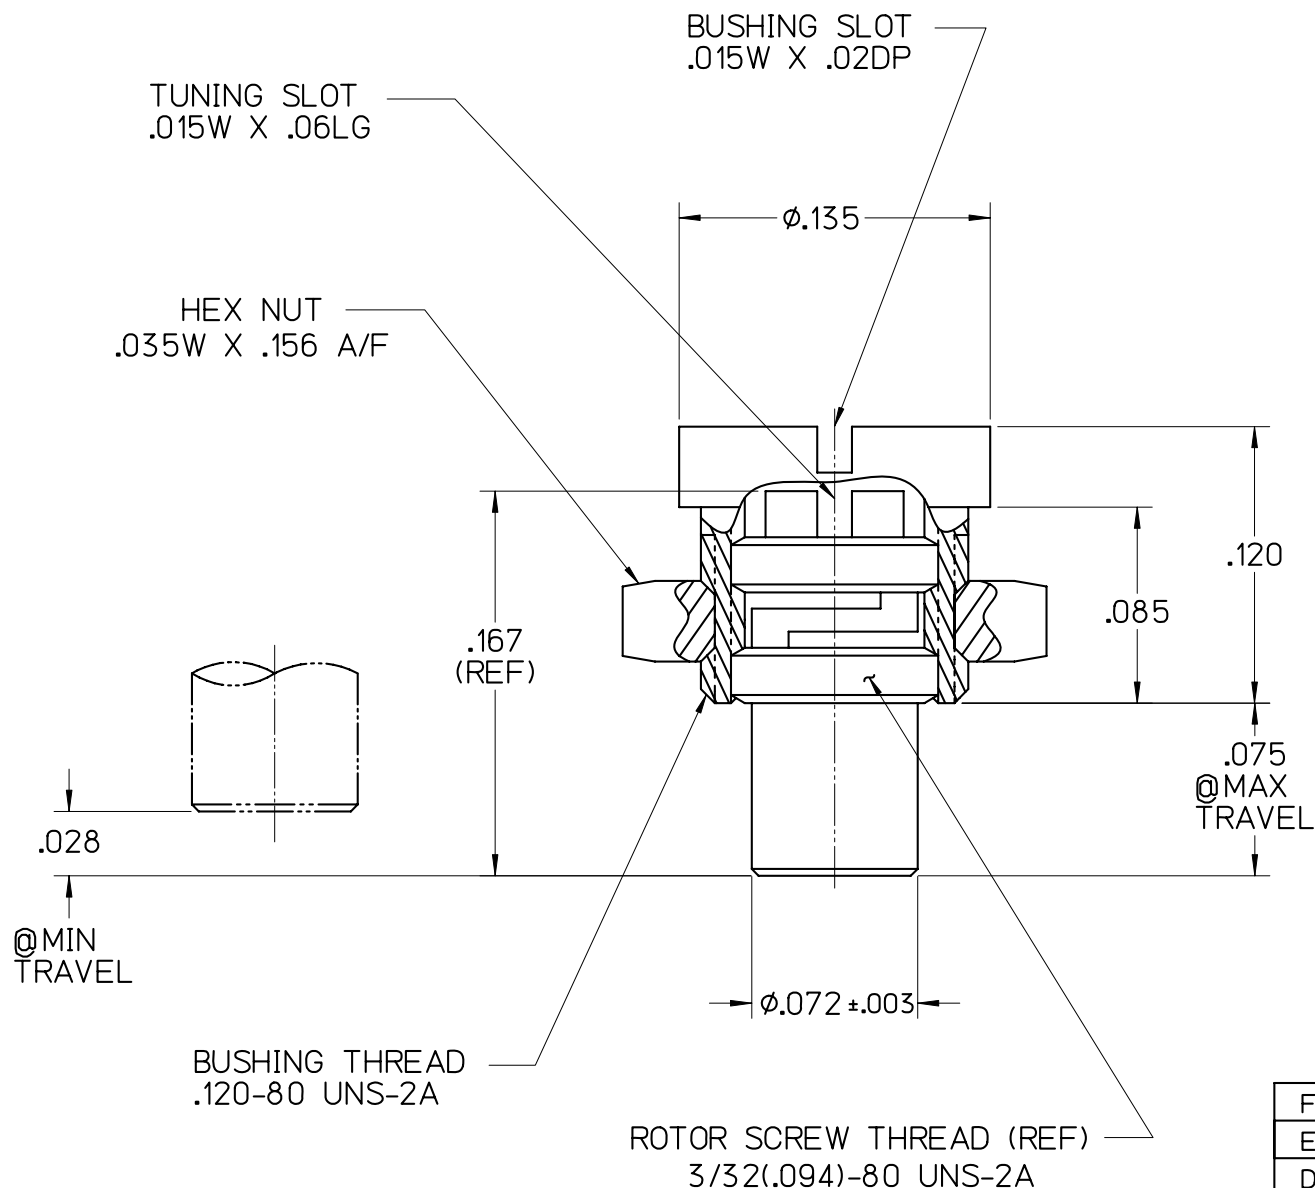


6924-10**F****TUNING ELEMENT**

SPECIFICATIONS

FILE: AIROUT

TORQUE MOUNTING	LOW CONTACT RESISTANCE	< 0.01 OHMS
	ROTATIONAL LIFE	> 1000 REVOLUTIONS
	TUNING	0.3 TO 3.0 OZ. IN.
	NUT MOUNTING	10 OZ. IN. MAX
CLEARANCE HOLE	THREADED HOLE	JMC TAP P/N 7060 (.120-80 UNS-2)
	CONCENTRICITY	WITHIN .002 T.I.R.
BRASS STRUCTURE		
APPLICATIONS: FOR HIGH Q VARIABLE REACTANCE TUNING OF MICROWAVE CAVITIES, FILTERS, AND OTHER RESONANT STRUCTURES.		
RoHS COMPLIANT		

F	11/03/10	BFH	MAI	MAI	000890
E	01/10/02	MLD	TAM	JHT	020-001
D	01/02/02	MLD	TAM	JHT	010-134
C	01/18/00	-	-	-	000-023
LEVEL	DATE	DRN.	CHK.	APP.	ECN

REVISIONS

DRN.	CHK.	APP.	SCALE
RJV	RJV	WEH	12"=1"
DATE	DATE	DATE	.XX $\pm$.015
01/18/00	01/18/00	02/01/00	.XXX $\pm$.005

**JOHANSON MANUFACTURING CORPORATION**

ROCKAWAY VALLEY ROAD, BOONTON, N.J. 07005 (973)334-2676 FAX (973)334-2954
ELECTRONIC ACCURACY THROUGH MECHANICAL PRECISION

PROPRIETARY INFORMATION CONTAINED NOT TO BE USED WITHOUT JOHANSON MANUFACTURING CORPORATION APPROVAL