

A

A

B





B

C


C

D


D

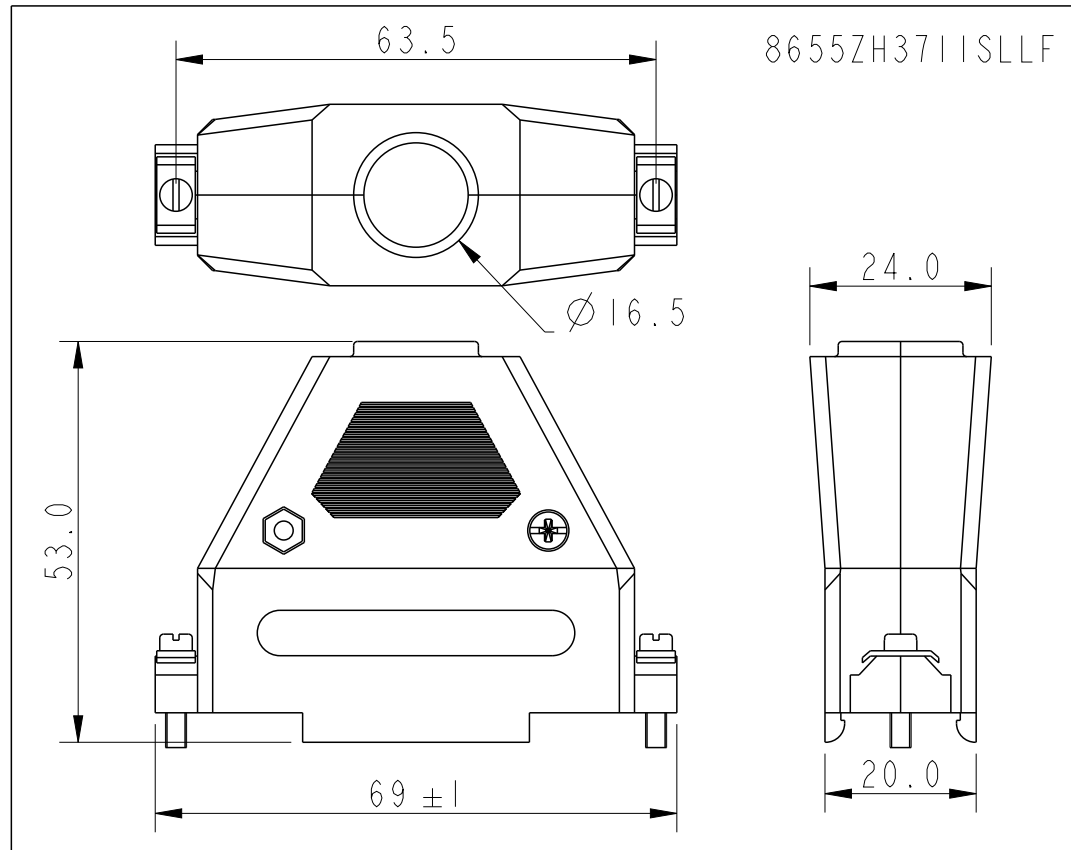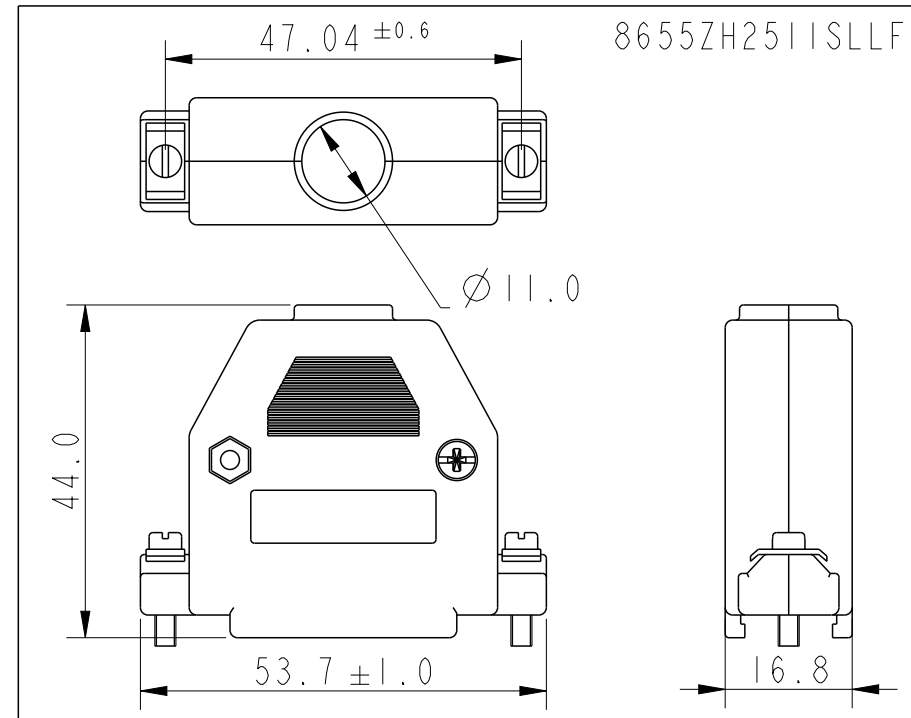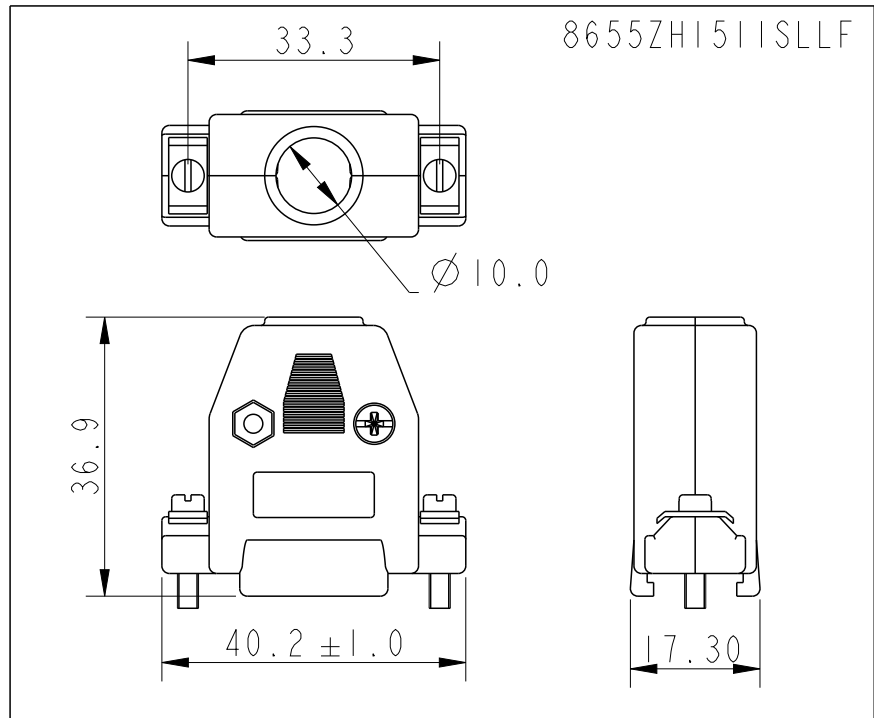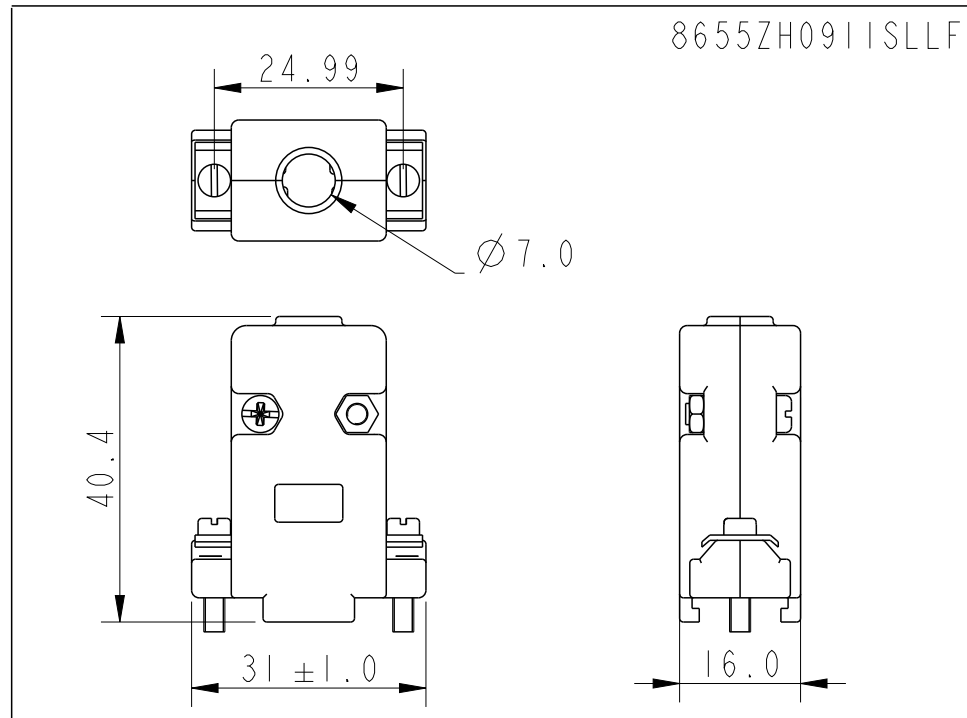

EXPLODED VIEW

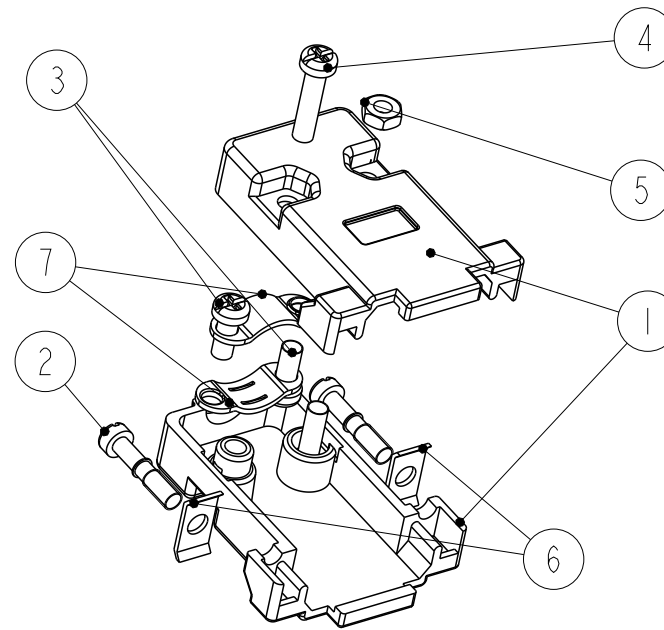

ASSEMBLED VIEW



NOTES:



- 1) OPERATING TEMPERATURE: -55°C to +70°C
- 2) INDIVIDUAL KITS SEALED IN PLASTIC COVER IN UNASSEMBLED FORM WITH HOOD & METAL ACCESSORIES SEALED IN TWO SEPARATE HALVES. BOM AS SHOWN IN TABLE

NOTE:RoHS INFORMATION

- The LF product meets European union Directives and other country regulations as described in GS-47-0004.
- The product is not indented to be exposed to a manufacturing solder process.

BILL OF MATERIAL

ITEM	DESCRIPTION	QTY	MATERIAL
1	METALIZED HOODS	2 PCS	ABS UL 94- CHROME FINISH
2	SPECIAL SCREW	2 PCS	STEEL- Ni PLATED
3	CLAMP SCREWS	2 PCS	STEEL- Ni PLATED
4	HOOD SCREWS	2 PCS	STEEL- Ni PLATED
5	HEXAGONAL NUT	2 PCS	STEEL- Ni PLATED
6	SADDLE WASHER	2 PCS	STEEL- Ni PLATED
7	STRAIN RELEIF CLAMP	2 PCS	STEEL- Ni PLATED

spec ref				dr	Paul Mithun	2013/12/11	projection 	MM 	size	A3	scale	1:1
tolerance std ISO 406 ISO 1101	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Paul Mithun	2013/12/11			ecn no	-		
				chr	-	-						
				appr		K-Paul Biju			2013/12/11	product family		-
surface -  ISO 1302	linear	0.X	±0.7		title METALIZED HOODS FOR 9-37 Posns				dwg no	10125252		rev A
		0.XX	±0.5									
		0.XXX	±0.5									
	angular	0°	±2°	www.fci.com	cat. no.	--	Product - Customer Drw				sheet 1 of 1	