



符合"DLK环境管理物质技术标准"

符合"IEC协会标准"

工程变更通知单 ECN(DCN) NO.	版本 REV	日期 DATE	说明 DESCRIPTION	改变 CHANGE	承认 APPRO.
KSECN16011	A	20160202	NEW RELEASE	——	——
KSECN16067	B	20160927	后盖增加逃料 $\triangle$ *1	万小龙	王永辉
KSECN18064	C	20181204	鱼叉脚卡板尺寸公差由 3.30 ± 0.15 改为 $3.30^{+0.15}_{-0.10}$ $\triangle$ *1	王永辉	严成旺

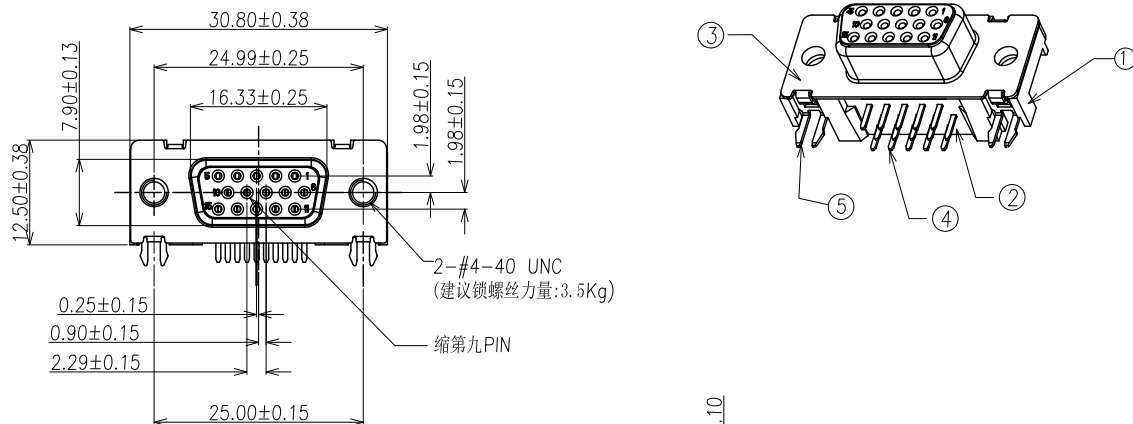

螺丝规格




1. 螺丝扭力为 6.0 ± 0.5 Kgf;
2. 所附螺丝数量为装箱数*2, 并在此基础上增加1%的螺丝数量, 用塑料袋包装并贴上标签;

NOTE:



1. MATERIAL:

- 1.1 Housing/Cover: PBT UL94v-0, color: Black
 - 1.2 Contact: Copper alloy
 - 1.3 Shell: Ferro alloy
 - 1.4 Rivet Insert:Ferro alloy
 - 1.5 Screw: Ferro alloy
2. PLATING:

- 2.1 Contact: 1u"Au plated on contact Area, 100u" Min. Matte Tin plated on solder tail, 50u" Min.Nickel underplated
- 2.2 Shell: Nickel plated overall
3. MECHANICAL:
- 3.1 Insertion force:2.0~5.0kgf.
- 3.2 Withdrawal force:1.0Kgf Min.
- 3.3 Durability:500 cycles Min.
- 4 ELECTRICAL:
- 4.1 Current Rating:1.0A
- 4.2 Voltage Rating:36V
- 4.3 Dielectric strength:500V AC FOR 1 minute
- 4.4 Insulation Resistance:1000MΩ Min.
- 4.5 Contact Resistance:30mΩ Max
5. Operating Temperature:-55°c to +105°c
6. PACKING: Tray






DETAIL A



DLK LOGO

HF 无卤字样

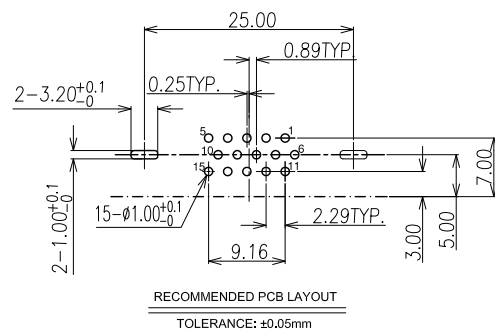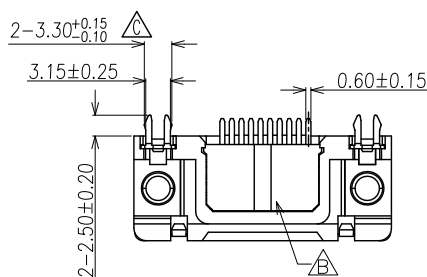

6	SCREW	2	FERROALLOY	Ni PLATED
5	RIVET INSERT	2	FERROALLOY	Tin PLATED
4	Contact	15	COPPER ALLOY	Au And Tin plated
3	Shell	1	FERROALLOY	Ni PLATED
2	Cover	1	PBT 无卤	UL94V-0,Blue
1	Housing	1	PBT 无卤	UL94V-0,Black
NO.	ITEM	Q'TY	DESCRIPTION	FINISH

GENERAL TOLERANCE UNLESS OTHERWISE NOTED		德力康电子科技有限公司 DLK DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD			
Angle	±5°				
X.	±0.35				
.X	±0.25				
.XX	±0.15				
.XXX	±0.10				
A4					
UNIT:		mm	SCALE	1:1	SHEET: 1 of 1