
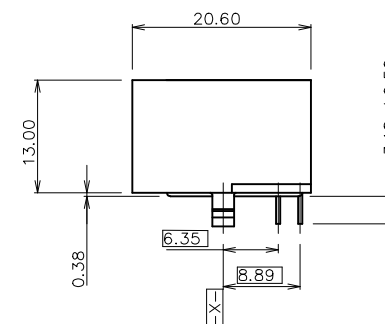
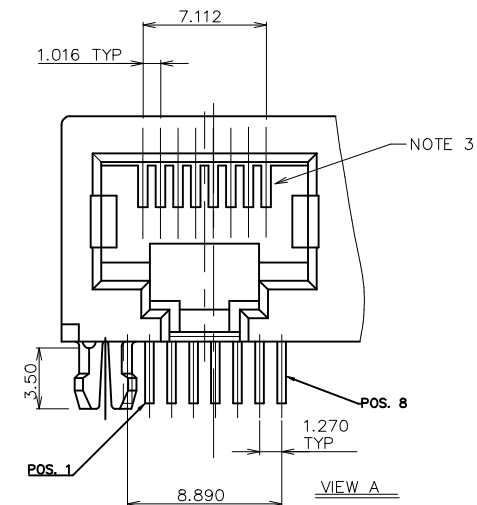
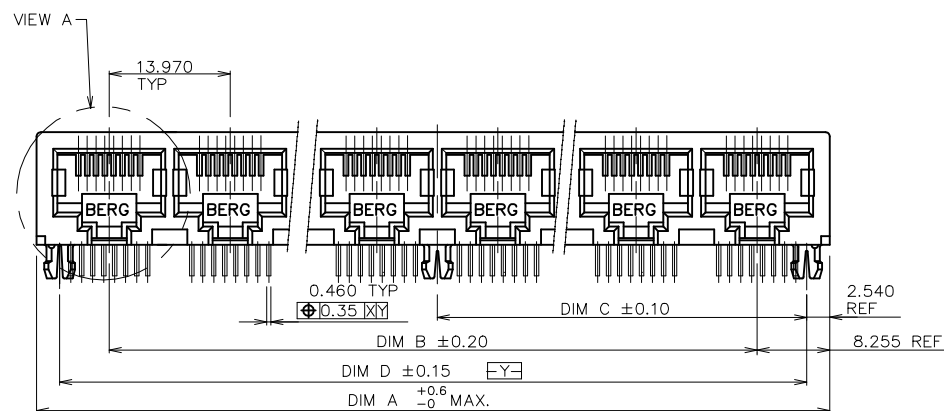


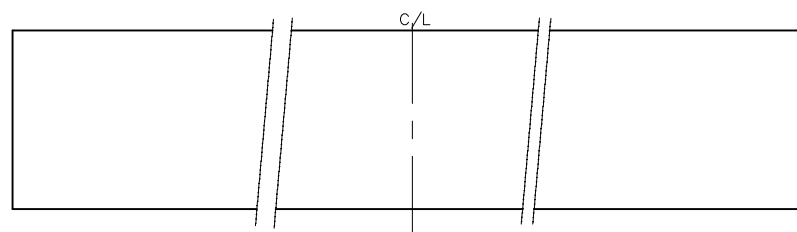


mat'l. code				surface		tolerance		projection	product family			
ltr	ecn no	dr	date	ISO 1301	ISO 406	ISO 1101	ISO 1101		MOD JACK			
E	M04-0174	MTH	8/17/04	0°±2°	0.X±0.3	0.XX±0.13	0.XXX±0.051	mm	title			
F	M04-0187	MTH	10/06/04					scale 1.0	R/A CAT5 GANG JACK ASSY			
G	M05-0067	MTH	4/8/05						8 POS UNSHIELDED SNAP PEG			
H	N06-0036	DT	2/9/06	dr	L.POTTEIGER	8/30/95			dwg no			
J	ELX-N-007926	SH	2011-11-18	eng	Y.BELOPOLSKY	8/30/95			sheet 1 of 2 size			
K	ELX-N-011015	SH	03/27/12	chr	Y.BELOPOLSKY	8/30/95			95679 A4			
L	ELX-N-45280	JF	7/06/22	app	Y.BELOPOLSKY	8/30/95			type Product Customer Drawing			
sheet index	revision	L	L									
	sheet	1	2									

PRODUCT No.	PORTS No	DIM A ^{+0.60} _{-0.00}	DIM B ±0.20	DIM C ±0.10	DIM D ±0.15	COMMENT
95679-X01/X01LF	1	15.24	-----	5.715	11.43	
95679-X02/X02LF	2	30.48	13.97	12.700	25.40	
95679-X03/X03LF	3	44.45	27.94	19.685	39.37	
95679-X04/X04LF	4	58.42	41.91	26.670	53.34	
95679-X05/X05LF	5	72.39	55.88	33.655	67.31	
95679-X06/X06LF	6	86.36	69.85	40.640	81.28	NOTE 4
95679-X06P/X06PLF						
95679-X07/X07LF	7	100.33	83.82	47.625	95.25	
95679-X08/X08LF	8	114.30	97.79	54.610	109.22	
95679-X09/X09LF	9	128.27	111.76	61.595	123.19	NO MOULD
95679-X10/X10LF	10	142.24	125.73	68.580	137.16	NO MOULD
95679-X11/X11LF	11	156.21	139.70	75.565	151.13	NO MOULD
95679-X12/X12LF	12	170.18	153.67	82.550	165.10	NO MOULD

NOTES:

1. APPLICABLE PC BOARD THICKNESS: 1.6 mm.
2. CONTACTS: PHOSPHOR BRONZE ALLOY UNS-C51000, Ø0.460 ROUND WIRE, PLATING SEE TABLE.
3. CENTER PEG FOR 8 PORT AND ABOVE.
- ④ OPTIONAL CENTER PEG IN PORT 6 (95679-X06PLF) WITH CENTER PEG (95679-X06LF) WITHOUT CENTER PEG
- ⑤ PART NUMBERS WITH LF IN THE END ARE LEAD FREE.
4. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
5. THE HOUSING TEMPERATURE WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.5 MM MINIMUM THICK CIRCUIT BOARD. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.
- ⑥ PLATING OPTION:
MAY BE EITHER GOLD OR GXT PLATED AT MANUFACTURER'S OPTION.
7. PRODUCT SPECIFICATION GS-12-083
PACKAGING SPECIFICATION GS-14-361

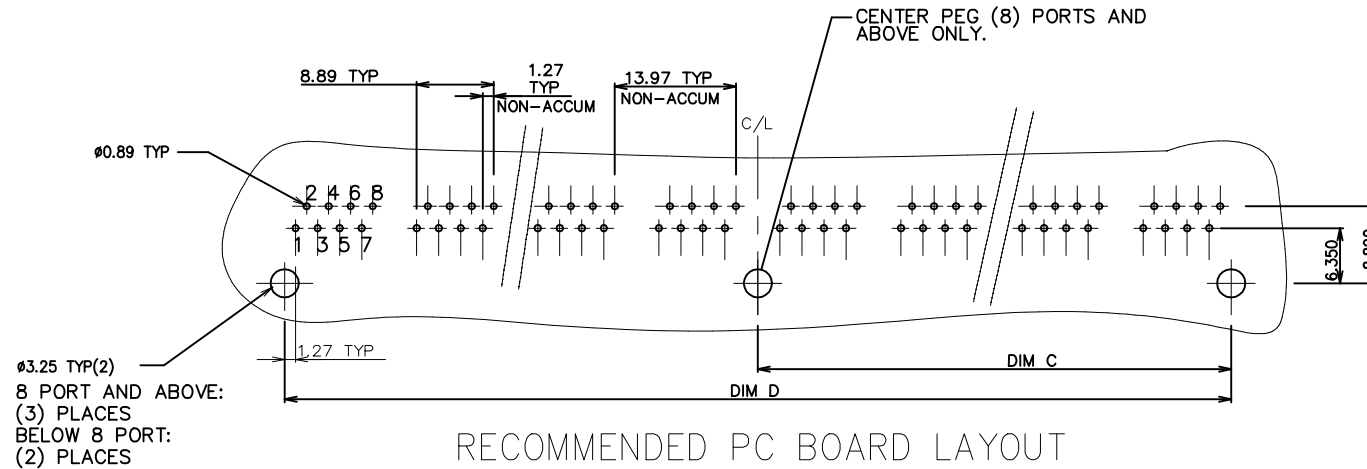

RECOMMENDED PC BOARD LAYOUT

PLATING CODE X	PLATING ⑥
0	5u" Au + high performance lubricant
1	15u" GOLD.
2	15u" G.X.T.
3	5u" Au + high performance lubricant
5	50u" GXT.

mat'l. code				surface	tolerance	projection	product family
				ISO 1301	ISO 406 ISO 1101		MOD JACK
ltr	ecn no	dr	date	tolerances unless otherwise specified			title
L				angle	0.X±0.3	MM	R/A CAT5 GANG JACK ASSY
				0°±2°	0.XX±0.13		8 POS UNSHIELDED SNAP PEG
					0.XXX±0.051	scale 1.0	dwg no
				dr	L.POTTEIGER	8/30/95	sheet 2 of 2 size
				eng	Y.BELOPOLSKY	8/30/95	95679 A4
				chr	Y.BELOPOLSKY	8/30/95	
				app	Y.BELOPOLSKY	8/30/95	
sheet index	revision	sheet					type Product Customer Drawing