

Cable Assembly Coaxial BNC to BNC
RG-174 48.0" (1.2m) 4.0'

RoHS
Compliant

FEATURES

- 50Ω impedance
- BNC Plug to BNC Plug
- RG-174

Stock No.: 9202436R0661




Product Description

Terminated with BNC male straight connector to BNC male straight connector for a durable, impedance match coaxial cable assembly. Gold plated contacts are utilized to minimize insertion loss.

General Specifications

Attribute	Value
Terminated/Unterminated	Terminated
Coaxial Type	RG-174
Connector 1	BNC Plug
Connector 2	BNC Plug
Connector 1 Gender	Male
Connector 2 Gender	Male
Characteristic Impedance	50 Ω
Length	48.0" (1.2m) 4.0'
Voltage Rating	500 Vrms

Product Drawing

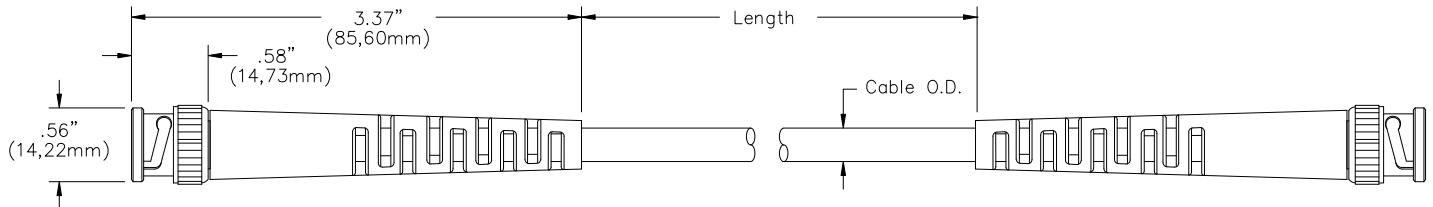

Features:

- The molded strain relief is directly bonded to the cable jacket for superior strength and durability.
- PTFE insulation and nickel tarnish resistant outer shells used in the BNC connector provide long life and reliability.
- Gold-plated center contacts assure the most noise free connection possible.
- The connectors and cable are impedance matched.

Cable Designation & Type:

RG174/U, smaller diameter 50 Ohm cable for greater flexibility in tight applications. It is best suited for use in low power situations where small size and flexibility is important.

Voltage:

500 Vrms max from center conductor to shield, and 30 Vac / 60 Vdc max from shield to earth in controlled hands-free testing environments.

Materials:

BNC male: Body – Brass, Tarnish Resistant Nickel Plating
Center Contact – Brass, Gold Plated Dielectric – PTFE

Strain Relief: PVC molded directly to cable and connectors

Dimensions: Millimeters (Inches)

Part Number Table

Part Number	Description
9202524R0749	Cable Assembly Coaxial BNC to BNC RG-174 6.00" (152.40mm)
9202456R0681	Cable Assembly Coaxial BNC to BNC RG-174 12.00" (304.80mm)
9202455R0680	Cable Assembly Coaxial BNC to BNC RG-174 24.00" (609.60mm)
9202476R0701	Cable Assembly Coaxial BNC to BNC RG-174 36.00" (914.40mm)
9202436R0661	Cable Assembly Coaxial BNC to BNC RG-174 48.0" (1.2m) 4.0'
9202493R0718	Cable Assembly Coaxial BNC to BNC RG-174 60.0" (1.5m) 5.0'
9202437R0662	Cable Assembly Coaxial BNC to BNC RG-174 72.0" (1.8m) 6.0'
9202542R0767	Cable Assembly Coaxial BNC to BNC RG-174 96.0" (2.4m) 8.0'
9202398R0623	Cable Assembly Coaxial BNC to BNC RG-174 120.0" (3.0m) 10.0'
9202539R0764	Cable Assembly Coaxial BNC to BNC RG-174 144.0" (3.7m) 12.0'
9202416R0641	Cable Assembly Coaxial BNC to BNC RG-174 180.0" (4.6m) 15.0'
9202446R0671	Cable Assembly Coaxial BNC to BNC RG-174 240.0" (6.1m) 20.0'
9202507R0732	Cable Assembly Coaxial BNC to BNC RG-174 300.0" (7.6m) 25.0'
9202540R0765	Cable Assembly Coaxial BNC to BNC RG-174 360.0" (9.1m) 30.0'
9202470R0695	Cable Assembly Coaxial BNC to BNC RG-174 480.0" (12.2m) 40.0'
9202541R0766	Cable Assembly Coaxial BNC to BNC RG-174 600.0" (15.2m) 50.0'

Important Notice: This data sheet and its contents (the "Information") belong to the members of the EASE group of companies (the "Group") or are licensed to it. No license is granted for the use of it other than for information purposes in connection with the products to which it relates. No license of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate, but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. EASE is the registered trademark of Ease Electronics Co., Limited 2019.