


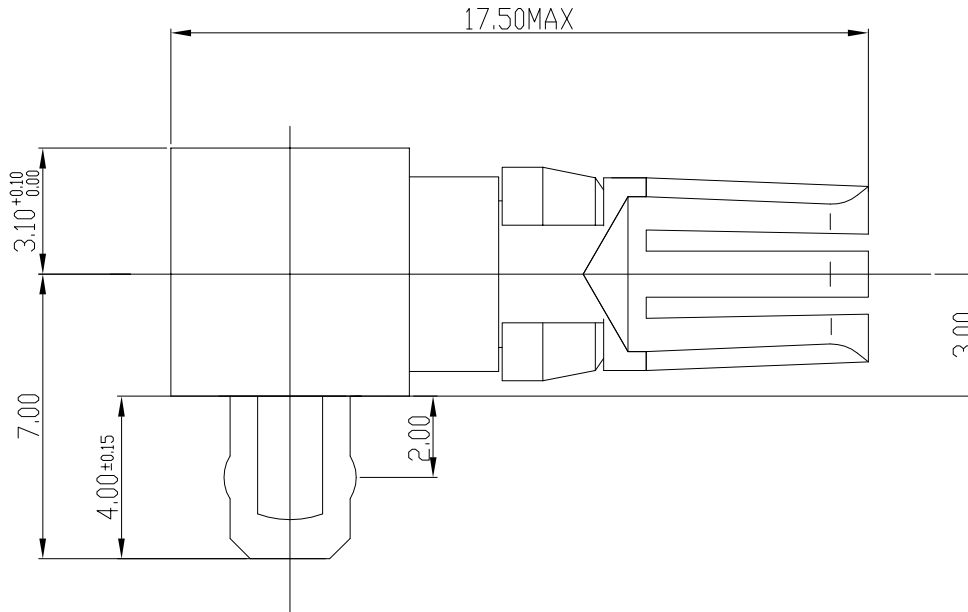

PERFORMANCE CHARACTERISTICS:

- *MIN.PRESS-FIT RETENTION FORCE : 20N
- *MAX CURRENT: 40 A
- *ALLOWED PCB THICKNESS : MIN. 1.6 mm.


RECOMMENDED PLATED THROUGH HOLE:

- *DRILLED HOLE : Ø 3.19 - 3.25 mm.
- *FINISHED HOLE : Ø 3.02 - 3.20 mm.
- *Cu PLATING : 25 um MIN.
- *Sn/SnPb PLATING : 5 um MIN.

NOTE:

- 1, TO BE USED ONLY WITH TYPE L,M UN SHIELDED & TYPE N CONNECTOR.
- 2, FOR MISSING INFO SEE DRAWING BS,C ,201624,028

- 3, LEAD FREE INDICATOR : LF = LEAD FREE



PLATING CODE (REF DWG No. BS,C ,201624,028)

4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

rev	ecn no	dr	date
A	CONVERSION REVISION 04	KN	14-09-01
B	EC B20050	MF	18-03-02
C	ADDING NOTE EC B20037	BVE	25/07/02
D	105-0091	ALEX B	04-06-05
E	105-0157	ALEX B	06-09-05
F	0607-0411	KASDN	17-10-07

Material			Spec ref			
Mat code			✓	tolerance	projection	
Heattreat				1DEC ± 0.2 1DEC 2DEC ± 0.1 2DEC ANGLES ± 1° H/DIEKEN		
Plating/Finish						
Dr	M.FRET	26-06-97	size A4			Scale 1/1
Eng			Product family MILLIPACS			
Chr			Model Name			ECN
Appr			Model Revision			REL Level
		title FEMALE EYE D/T NEEDLE PRESS-FIT POWER CONTACT			dwg no BSA201624020	Rev. F
Pro/E file	catalog no	RC12PIE70-----		CUSTOMER DRAWING		sheet 1 of 1