
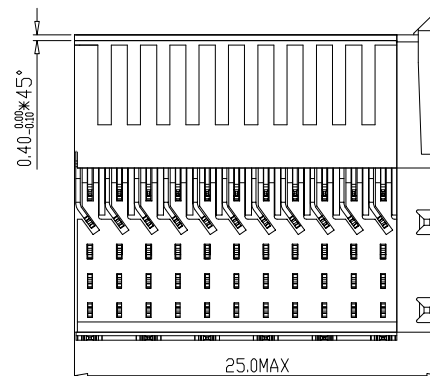
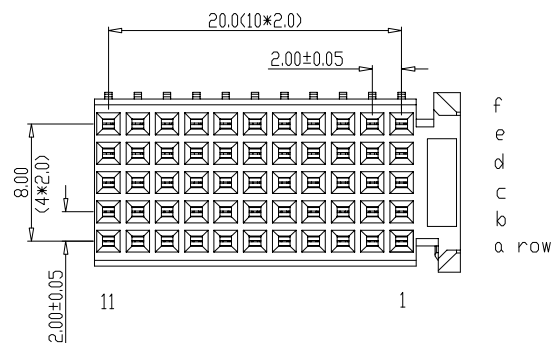





RATED VOLTAGE : 500 V AC (CONT /CONT)
 OPERATING TEMPERATURE : -55°C TO 125°C
 CONTACT RESISTANCE 20 MΩ MAX
 INSERTION FORCE : 0.75N MAX/CONT
 EXTRACTION FORCE : 0.15N MIN/CONT
 INSULATION RESISTANCE : 10^4 MΩ MIN

- LEAD FREE INDICATOR :LF=LEAD FREE
- NOTES 1. 
- PERFORMANCE LEVEL INDICATOR
(REF DWG NLBSC 20184.003)
2. THIS PRODUCT IS CSA APPROVED.
THIS PRODUCT IS UL RECOGNIZED.
 3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :
BSA.201572.001
 4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND
OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

Material			Spec ref			tolerance 1DEC ± 0.2 1DEC 2DEC ± 0.1 2DEC ANGLES ± 1° HDEKEN		projection 		MM 	
Mat code											
Heattreat											
Plating/Finish											
Dr	W.Panis	07-04-92					size A4		Scale 2.000		
Eng			Product family MILLIPACS								
Chr			Model Name				ECN				
Appr			Model Revision				REL Level				
		title	MPACS 5+2R RA RCP CONN TYPE CR			dwg no	BSC201444053			Rev D	
Pro/E file	catalog no	HM2R20PA5108----	CUSTOMER DRAWING					sheet 1 of 1			