



RM12PIE94---LF

PIN CONTACT

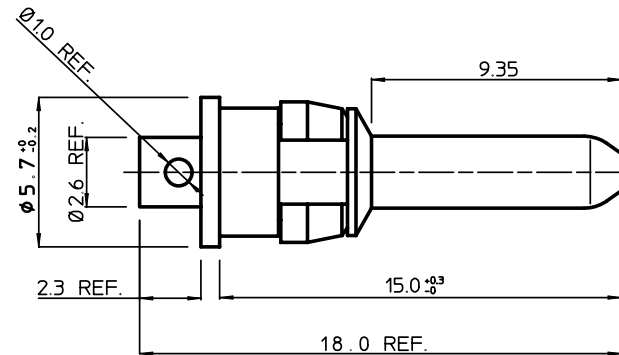


RC12PIE92---LF

SOCKET CONTACT

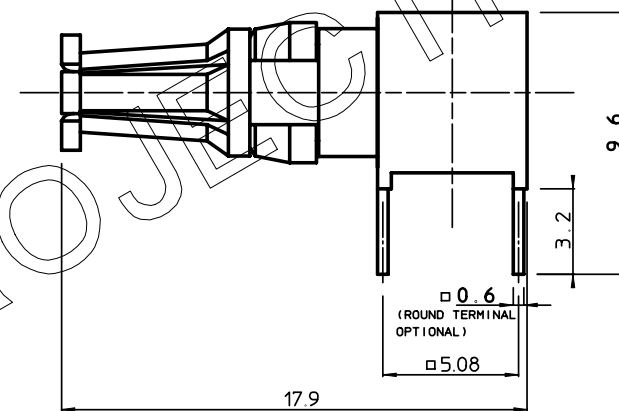

PCB LAY-OUT

CATALOGUE
NUMBERMAX.
CURRENT

RM12PIE94---LF

10 A

RC12PIE92---LF

10 A
(4 SOLDER TAGS)

PERFORMANCE CHARACTERISTICS:

--- : PLATING CODE

- INSERTION FORCE: 10 N MAX.
- WITHDRAWAL FORCE: 1.6 N MIN.
- CONTACT RESISTANCE: < 1mΩ UNDER 10 A

NOTE: 1) FOR MISSING INFO SEE DRAWING BS,C ,201624,028

2) PLATED THROUGH HOLE INFO SEE DRAW.

BS,A,201572,011 (RM12PIE94---LF)

BS,A,201572,012 (RC12PIE92---LF)

3) THE PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

1DEC ±0,2 2DEC ±0,1 ANGLES ±1°	APPR.	DATE	SIGN.	F.M./L.B. HDR / REC POWER CONTACTS (DIPSOLDER)
WE RESERVE THE RIGHT TO CHANGE DIMENSIONS OR REQUIREMENTS WITHOUT PRIOR NOTICE.	DRAFT	1993-07-07	W.P.	CAT. No. R-12PIE9---LF
ALL DIMENSIONS IN MM	CHECKED			FCI www.fciconnect.com
	PROD. MGR.			SCALE
	PR. ENG. MGR.			5/1
	PR. MGT. MGR.			BS,C ,201624,008
	REFERENCES			E
				STATUS: Released
				CUSTOMER DRAWING REVISION