


Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation écrite du Propriete de c FCI. Droits de reproduction FCI.


FCI

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

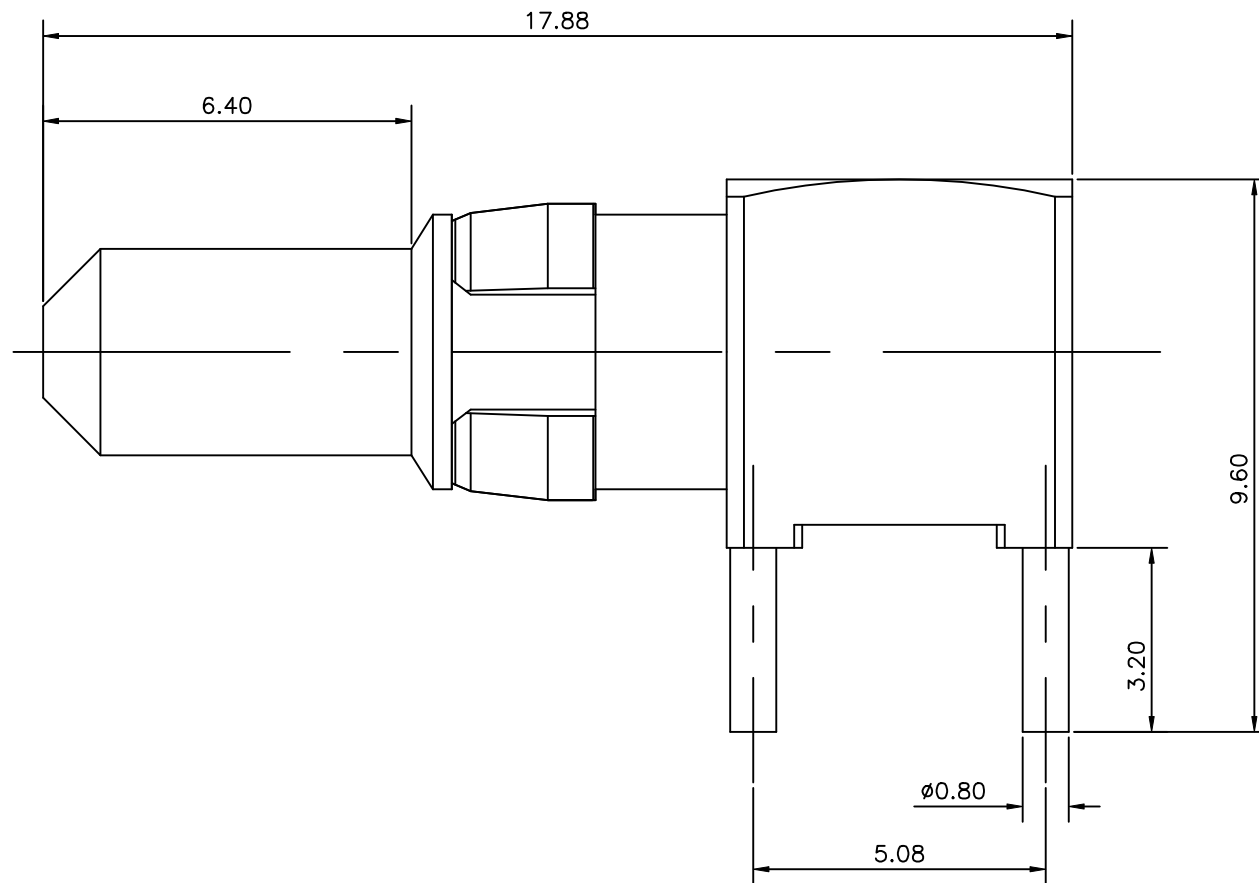

NOTE

1. FOR MISSING INFORMATION SEE DRAWING BSC 201624 028
2. PLATED THROUGH HOLE INFORMATION SEE DRAWING BSA,201572,012
3. PERFORMANCE CHARACTERISTICS
 - CURRENT CAPACITY - 10 A (4 SOLDER TAGS)
 - INSERTION FORCE - 10N MAX.
 - WITHDRAWAL FORCE - 1.6 N MIN
 - CONTACT RESISTANCE : < 1m Ω UNDER 10 A

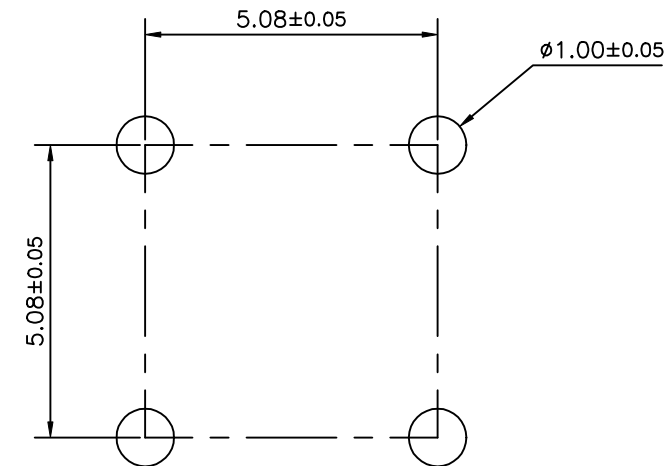

PCB LAY-OUT

								<div>✓</div>		Tolerance LINEAR ±0.1 ANGULAR ±1°		Projection <div></div>		MM <div></div>			
Dr		Mini K Vandanath		25/02/2005		Product Family				MILLIPACS				Size		Scale	
Eng		Biju K Paul		25/02/2005		Spec ref								A3		—	
Chr		Biju K Paul		25/02/2005				Material				ECN					
Appr		K Somasundaram		25/02/2005													