

Cable Assembly Coaxial SMA to
MMCX RG-178B 48.0" (1.2m) 4.0'

RoHS
Compliant

Stock No.: 9202464R0689

FEATURES

- 50Ω impedance
- SMA Jack to MMCX Plug
- RG-178B




Product Description

Terminated with SMA female bulkhead straight connector to MMCX male straight connector for a durable, impedance match coaxial cable assembly. Gold plated contacts are utilized to minimize insertion loss.

General Specifications

Attribute	Value
Terminated/Unterminated	Terminated
Coaxial Type	RG-178B
Connector 1	SMA Jack
Connector 2	MMCX Plug
Connector 1 Gender	Male
Connector 2 Gender	Female
Characteristic Impedance	50 Ω
Length	48.0" (1.2m) 4.0'
Voltage Rating	500 V

Product Drawing

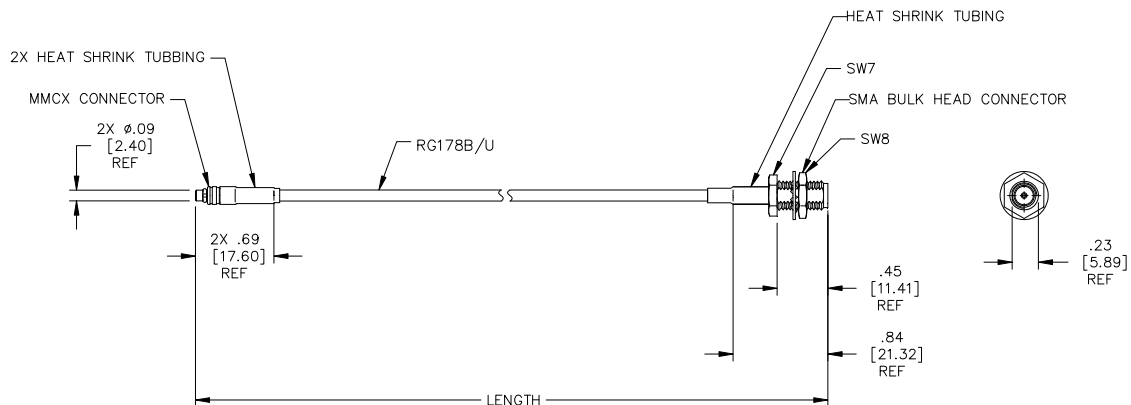

Features

- DC - 2GHz bandwidth.
- Connectors are precision machined and gold-plated for low loss.
- Perfect for applications where space, weight, performance and ease of connection are required.

Specifications

Cable Type	RG178B/U
Impedance	50Ω
Frequency Range	DC - 2GHz
Insulation Resistance	≥ 500 MΩ
Insulator Withstand	500V
Temperature Range	-55° C to +155°C (-67°F to +311°F)
Jacket	FEP
Cable O.D.	0.071" (1.8mm)
Center Conductor (mm)	7 x .1 silver coated copper covered steel

Materials

MMCX Male Connector:

Center Contact: Phosphor Bronze, Gold Plated
Connector Body: Brass, Gold Plated
Crimp Ferrule: Copper, Nickel Plated
Insulators: PTFE

SMA Female Connector:

Center Contact: Beryllium Copper, Gold Plated
Connector Body: Brass, Gold Plated
Crimp Ferrule: Copper, Nickel Plated
Insulators: PTFE

Dimensions: Millimeters (Inches)

Part Number Table

Part Number	Description
9202516R0741	Cable Assembly Coaxial SMA to MMCX RG-178B 12.00" (304.80mm)
9202582R0807	Cable Assembly Coaxial SMA to MMCX RG-178B 24.00" (609.60mm)
9202517R0742	Cable Assembly Coaxial SMA to MMCX RG-178B 36.00" (914.40mm)
9202464R0689	Cable Assembly Coaxial SMA to MMCX RG-178B 48.0" (1.2m) 4.0'

Important Notice: This data sheet and its contents (the "Information") belong to the members of the EASE group of companies (the "Group") or are licensed to it. No license is granted for the use of it other than for information purposes in connection with the products to which it relates. No license of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate, but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. EASE is the registered trademark of Ease Electronics Co., Limited 2019.