



Cable Assembly Coaxial SMA to SMA RG-316 60.0" (1.5m) 5.0'

RoHS Compliant

Stock No.: 9202567R0792

FEATURES

- 50Ω impedance
- SMA Plug to SMA Jack
- RG-316/U



Product Description

Terminated with SMA right angle male connector to SMA bulkhead female connector for a durable, impedance match coaxial cable assembly. Gold plated contacts are utilized to minimize insertion loss.


General Specifications

Attribute	Value
Terminated/Unterminated	Terminated
Coaxial Type	RG-316/U
Connector 1	SMA Right Angle Plug
Connector 2	SMA Bulkhead Jack
Connector 1 Gender	Male
Connector 2 Gender	Female
Characteristic Impedance	50 Ω
Length	60.0" (1.5m) 5.0'
Voltage Rating	750 V





Product Drawing

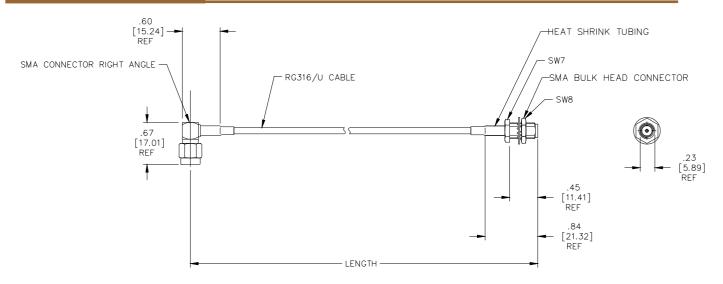

Features:

- DC 4GHz bandwidth.
- Connectors are precision machined and gold-plated for low loss.
- Perfect for applications where space, weight, performance, and ease of connection are required.

Materials:

SMA Male Connectors:

Center Contact: Brass, Gold Plated Connector Body: Brass, Gold Plated Crimp Ferrule: Copper, Nickel Plated

Insulators: PTFE

SMA Bulkhead Female Connectors:

Center Contact: Beryllium Copper, Gold Plated Connector Body: Brass, Gold Plated Crimp Ferrule: Copper, Nickel Plated

Insulators: PTFE

Dimensions: Millimeters (Inches)

Specifications

Cable Type	RG316/U
Impedance	50Ω
Frequency Range	DC - 4GHz
Capacitance per 1ft (0.305m)	29.0 pF
Insulation Resistance	≥ 1000 MΩ
Insulator Withstand	750V
Temperature Range	-65° C to +165°C (-85°F to +329°F)
Jacket	FEP
Cable O.D. (inches)	0.098" (2.5mm)
Center Conductor (mm)	7 x .18 silver coated copper covered steel

Part Number Table

Part Number	Description
9202401R0626	Cable Assembly Coaxial SMA to SMA RG-316 12.00" (304.80mm)
9202565R0790	Cable Assembly Coaxial SMA to SMA RG-316 24.00" (609.60mm)
9202566R0791	Cable Assembly Coaxial SMA to SMA RG-316 48.0" (1.2m) 4.0'
9202567R0792	Cable Assembly Coaxial SMA to SMA RG-316 60.0" (1.5m) 5.0'

Important Notice: This data sheet and its contents (the "Information") belong to the members of the EASE group of companies (the "Group") or are licensed to it. No license is granted for the use of it other than for information purposes in connection with the products to which it relates. No license of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate, but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. EASE is the registered trademark of Ease Electronics Co., Limited 2019.