



LMR-400-UF Equivalent Low Loss Flexible Coax Cable Black TPE Jacket

Stock No.: 9212722B0046


FEATURES

- 50 Ohms
- LMR-400-UF Equivalent
- Stranded

General Specifications



| Attribute | Value |
|-------------------------------|----------|
| Flex Type | Flexible |
| Impedance | 50 Ohm |
| Dielectric Type | PE (F) |
| Velocity of Propagation | 85 % |
| Jacket Diameter | 0.405 in |
| Jacket Material | TPE |
| No. of Shields | 2 |
| Attenuation at 1 Ghz. | 5 dB |
| RF Shielding | 90 dB |
| Frequency, Max | 6 GHz |
| Max Operating Temperature | 85 deg C |
| Center Conductor Type | Stranded |
| Minimum Bend Radius, One Time | 1 in |
| Minimum Bend Radius, Repeated | 4 in |

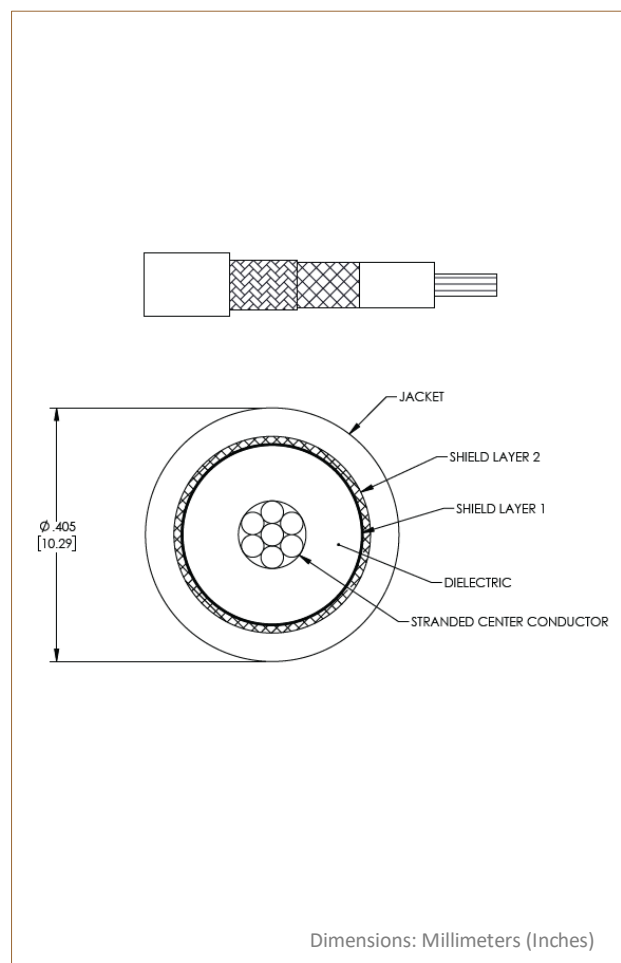

Important Notice: This data sheet and its contents (the "Information") belong to the members of the EASE group of companies (the "Group") or are licensed to it. No license is granted for the use of it other than for information purposes in connection with the products to which it relates. No license of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate, but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. EASE is the registered trademark of Ease Electronics Co., Limited 2019.