



.141 Semi-Rigid Equivalent Low Loss Coax Cable with Tin Plated Copper Outer Conductor and Microporous PTFE 76.5 pct VoP Dielectric, Straight Sections


Stock No.: 9212830B0154

FEATURES

- 50 Ohms
- .141 Semi-Rigid Equivalent
- Solid

General Specifications

Attribute	Value
Flex Type	Semi-Rigid
Impedance	50 Ohm
Dielectric Type	Microporous PTFE
Velocity of Propagation	76.5 %
No. of Shields	1
Attenuation at 1 Ghz.	10.5 dB
Power, Max at 1 Ghz.	580 Watts
Frequency, Max	34 GHz
Max Operating Temperature	200 deg C
Center Conductor Type	Solid
Inner Conductor, Number of Strands	1
Minimum Bend Radius, One Time	0.5 in

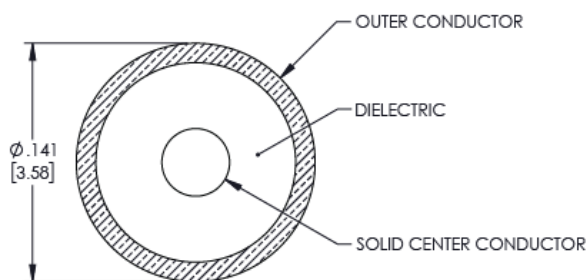

Dimensions: Millimeters (Inches)

Important Notice: This data sheet and its contents (the "Information") belong to the members of the EASE group of companies (the "Group") or are licensed to it. No license is granted for the use of it other than for information purposes in connection with the products to which it relates. No license of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate, but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. EASE is the registered trademark of Ease Electronics Co., Limited 2019.