
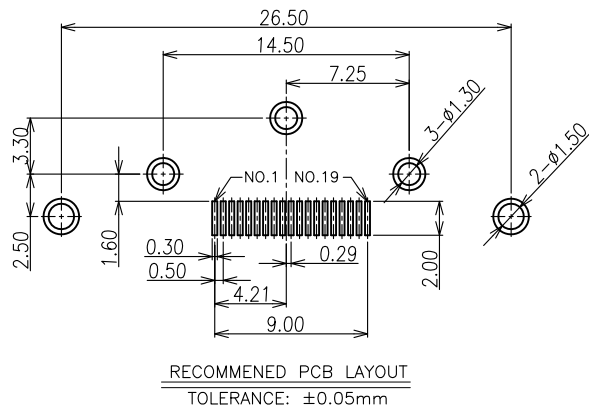


符合DLK环境管理物质技术标准, 符合HDMI协会标准

工程变更通知单 ECN(DCN) NO.	版本 REV	日期 DATE	说明 DESCRIPTION	改变 CHANGE	承认 APPRO.
KSRCN23017	A	20230602	NEW RELEASE	—	—

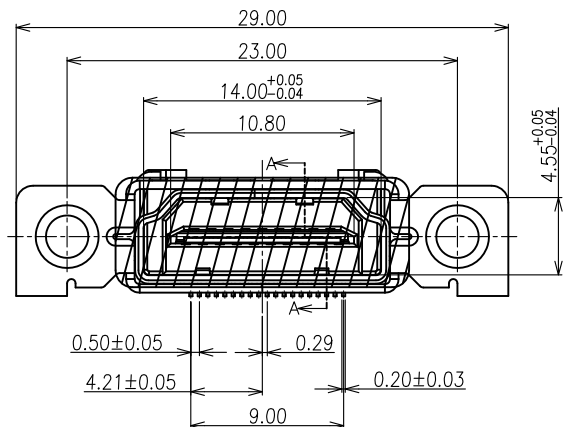

NOTE:

1. MATERIAL.

1.1 Housing: LCP UL94v-0, color: Black

1.2 Contact: Copper alloy

1.3 Shell: Ferro alloy

1.4 Support: Ferro alloy

2. PLATING:

2.1 Contact: 1u"Au plated on contact Area,
50u" Min. Matte Tin plated on solder tail,
50u" Min. Nickel underplated

2.2 Shell: Nickel plated overall

3. MECHANICAL:

3.1 Mating force: 4.5kgf Max.

3.2 Unmating force: 1.0~4.0kgf.

3.3 Durability: 10000 cycles Min.

4. ELECTRICAL:

4.1 Current Rating: 0.5A

4.2 Voltage Rating: 40V




4.3 Dielectric strength: 500V AC FOR 1 minute

4.4 Insulation Resistance: 100MΩ Min.

4.5 Contact Resistance: 10mΩ Max

5. Operating Temperature: -55°C to +105°C

6. PACKING: Tape & Reel

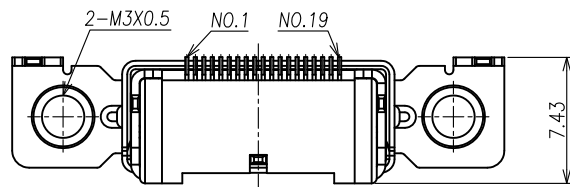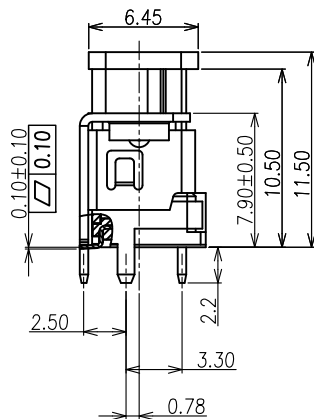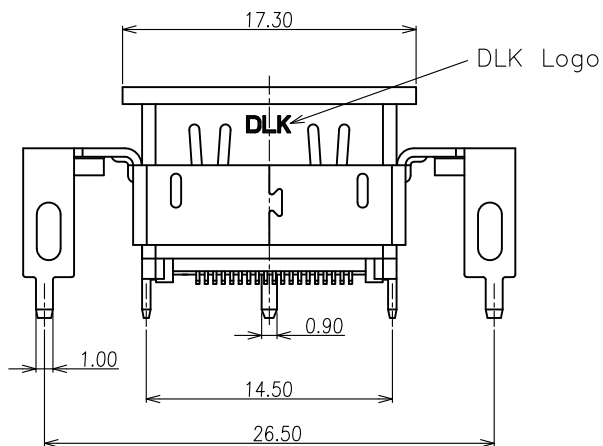

GENERAL TOLERANCE
UNLESS OTHERWISE NOTED

Angle	±5°
X.	±0.35
.X	±0.25
.XX	±0.15
.XXX	±0.10
A4	Ø



德力康电子科技有限公司

DLK

DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD

C 名称 TITLE:	HDMI 立式SMT 10.5H 脚长2.2mm			
档案名称 FILE NAME.	C-HDM4C-00-16	料号 PART NO.	54C19B01161	
DRAWING	邱 宇	CHECKED	覃智森	APPROVED 段国强
UNIT:	mm	SCALE	1:1	SHEET: 1 of 1