



符合"DLK环境管理物质技术标准"

符合VESA协会规范标准"






DLK Logo



打D/C区域
D/C说明:
如:2021年1月5日
则打 210105



SECTION A-A

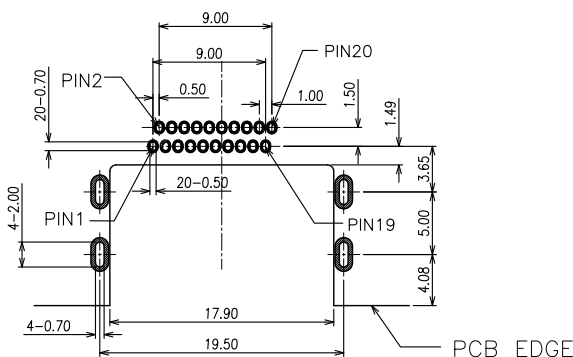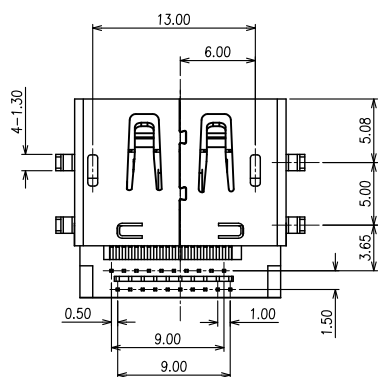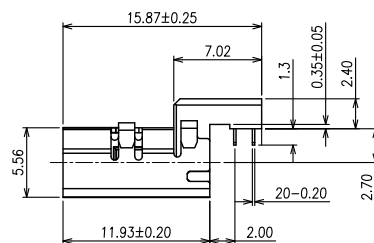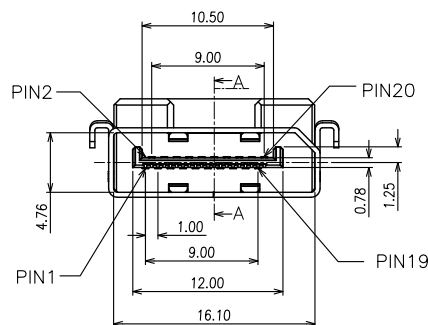

RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05mm

NOTE:

1. MATERIAL.

1.1 Housing: LCP UL94v-0, color: Black

1.2 Contact: Copper alloy

1.3 Shell: Stainless steel

2. PLATING:

2.1 Contact: 1u"Au plated on contact Area,
50u" Min. Matte Tin plated on solder tail,
50u" Min. Nickel underplated

2.2 Shell: Nickel plated overall

3. MECHANICAL:

3.1 Mating force:4.5kgf Max.

3.2 Unmating force:1.0~4.0kgf.

3.3 Durability:10000 cycles Min.

4 ELECTRICAL:

4.1 Current Rating:0.5A

4.2 Voltage Rating:40V

4.3 Dielectric strength:500V AC FOR 1 minute

4.4 Insulation Resistance:100MQ Min.

4.5 Contact Resistance:30mΩ Max

5. Operating Temperature:-55°c to +85°c

6. PACKING: Tape & Reel



德力康电子科技有限公司

DLK DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD

GENERAL TOLERANCE
UNLESS OTHERWISE NOTED

Angle ±5°

X. ±0.35

.X ±0.25

.XX ±0.15

.XXX ±0.10

A4

C 名称

TITLE:

档案名称

FILE NAME.

DRAWING

UNIT:

mm

DisplayPort SMT Type R/A RVS 沉板

C-DPT2L-00-00

料号

PART NO: 62L20B01101

CHECKED

1:1

SHEET: 1 of 1

3	CONTACT	20	COPPER ALLOY	PLATED Au
2	SHELL	1	STAINLESS STEEL	PLATED NI
1	HOUSING	1	LCP	UL94V-0,Black
NO.	ITEM	Q'TY	DESCRIPTION	FINISH

Angle	±5°	C 名称	DisplayPort SMT Type R/A RVS 沉板
X.	±0.35	档案名称	C-DPT2L-00-00
.X	±0.25	料号	62L20B01101
.XX	±0.15	CHECKED	蒋召
.XXX	±0.10	APPROVED	覃智森
A4		UNIT:	mm
		SCALE	1:1
		SHEET:	1 of 1