


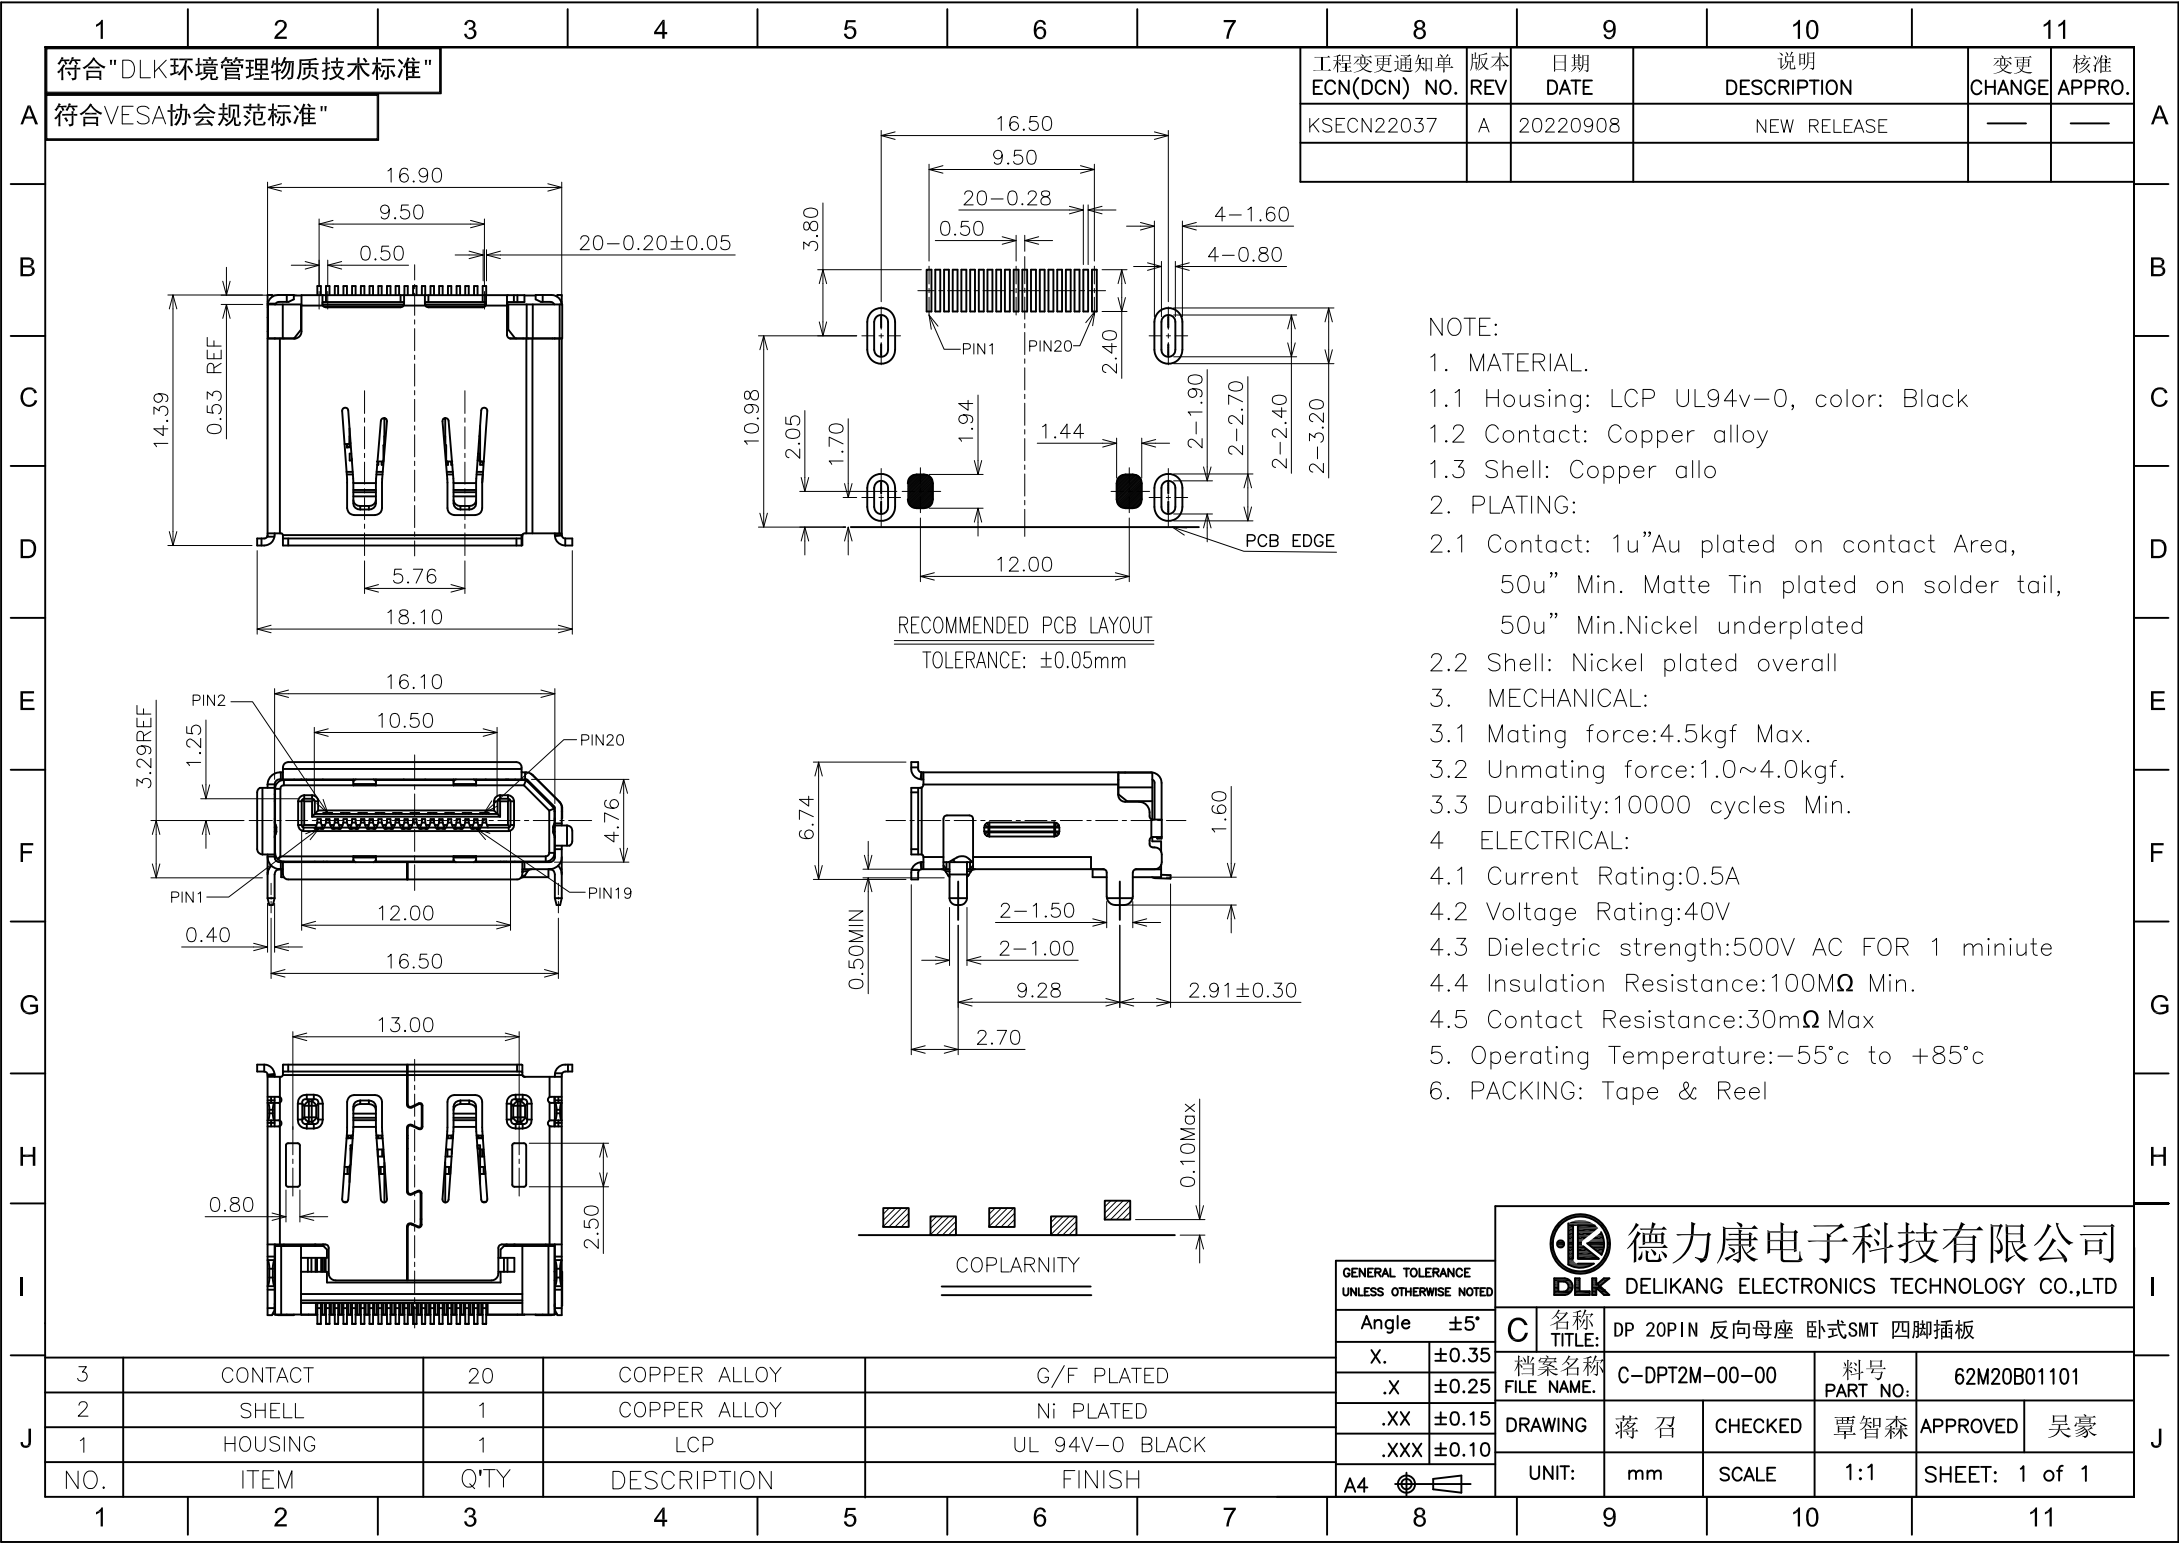

符合"DLK环境管理物质技术标准"

符合VESA协会规范标准"

工程变更通知单 ECN(DCN) NO.	版本 REV	日期 DATE	说明 DESCRIPTION	变更 CHANGE	核准 APPRO.
KSECN22037	A	20220908	NEW RELEASE	—	—

NOTE:

- MATERIAL.
 - Housing: LCP UL94v-0, color: Black
 - Contact: Copper alloy
 - Shell: Copper allo
- PLATING:
 - Contact: 1u"Au plated on contact Area, 50u" Min. Matte Tin plated on solder tail, 50u" Min.Nickel underplated
 - Shell: Nickel plated overall
- MECHANICAL:
 - Mating force:4.5kgf Max.
 - Unmating force:1.0~4.0kgf.
 - Durability:10000 cycles Min.
- ELECTRICAL:
 - Current Rating:0.5A
 - Voltage Rating:40V
 - Dielectric strength:500V AC FOR 1 minute
 - Insulation Resistance:100MΩ Min.
 - Contact Resistance:30mΩ Max
- PACKING: Tape & Reel

GENERAL TOLERANCE
UNLESS OTHERWISE NOTED

Angle	±5°
X.	±0.35
.X	±0.25
.XX	±0.15
.XXX	±0.10
A4	⌀

**德力康电子科技有限公司**
DLK DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD

C 名称 TITLE:	DP 20PIN 反向母座 卧式SMT 四脚插板			
	档案名称 FILE NAME.		料号 PART NO.	62M20B01101
DRAWING	蒋 召	CHECKED	覃智森	APPROVED 吴豪
UNIT:	mm	SCALE	1:1	SHEET: 1 of 1

3	CONTACT	20	COPPER ALLOY	G/F PLATED
2	SHELL	1	COPPER ALLOY	Ni PLATED
1	HOUSING	1	LCP	UL 94V-0 BLACK
NO.	ITEM	Q'TY	DESCRIPTION	FINISH