
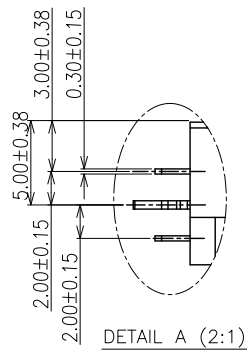
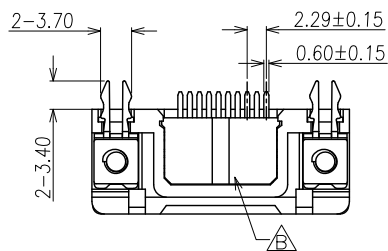

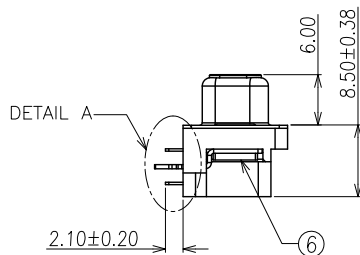

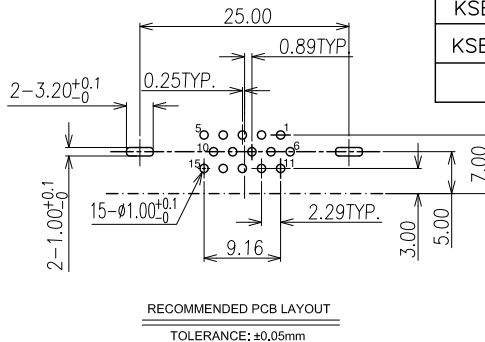


符合"DLK环境管理物质技术标准"

符合"IEC协会标准"

工程变更通知单 ECN(DCN) NO.	版本 REV	日期 DATE	说明 DESCRIPTION	改变 CHANGE	承认 APPRO.
KSECN15011	A	20150423	NEW RELEASE	——	——
KSECN16067	B	20160927	后盖增加逃料 Δ *1	万小龙	王永辉

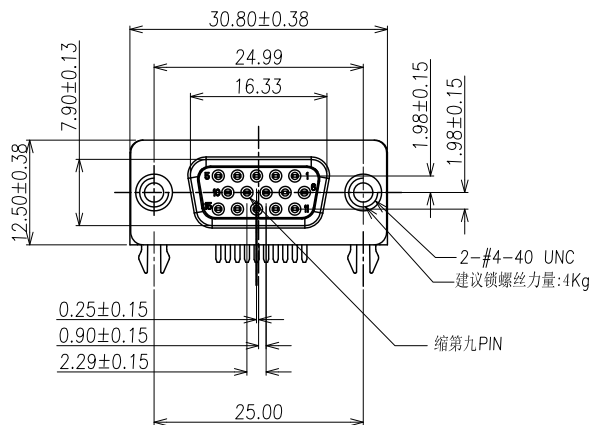

NOTE:

1. MATERIAL:

- 1.1 Housing/Cover: PBT UL94v-0, color: Black
- 1.2 Contact: Copper alloy
- 1.3 Shell: Ferro alloy
- 1.4 Rivet Insert:Ferro alloy
- 1.5 Rivet: Copper alloy

2. PLATING:

- 2.1 Contact: 1u"Au plated on contact Area, 100u" Min. Matte Tin plated on solder tail, 50u" Min.Nickel underplated
- 2.2 Shell: Nickel plated overall

3. MECHANICAL:

- 3.1 Insertion force:2.0~5.0kgf.
- 3.2 Withdrawal force:1.0Kgf Min.
- 3.3 Durability:500 cycles Min.

4. ELECTRICAL:

- 4.1 Current Rating:1.0A
- 4.2 Voltage Rating:36V
- 4.3 Dielectric strength:500V AC FOR 1 minute
- 4.4 Insulation Resistance:1000MΩ Min.
- 4.5 Contact Resistance:30mΩ Max
5. Operating Temperature:-55°c to +105°c
6. PACKING: Tray

6	RIVET	2	COPPER ALLOY	Ni PLATED
5	RIVET INSERT	2	FERROALLOY	Tin PLATED
4	Contact	15	COPPER ALLOY	Au And Tin plated
3	Shell	1	FERROALLOY	Ni PLATED
2	Cover	1	PBT (无卤)	UL94V-0,Black
1	Housing	1	PBT (无卤)	UL94V-0,Black
NO.	ITEM	Q'TY	DESCRIPTION	FINISH

GENERAL TOLERANCE UNLESS OTHERWISE NOTED		德力康电子科技有限公司 DLK DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD			
Angle	±5°				
X.	±0.35				
.X	±0.25				
.XX	±0.15				
.XXX	±0.10				
A4					
		名称 TITLE:	D-SUB R/A 12.5H CONN		
		档案名称 FILE NAME:	C-DSB4M-00-HF	料号 PART NO:	84M15B01301
		DRAWING	王永辉	CHECKED	——
		UNIT:	mm	SCALE	1:1
					SHEET: 1 of 1