

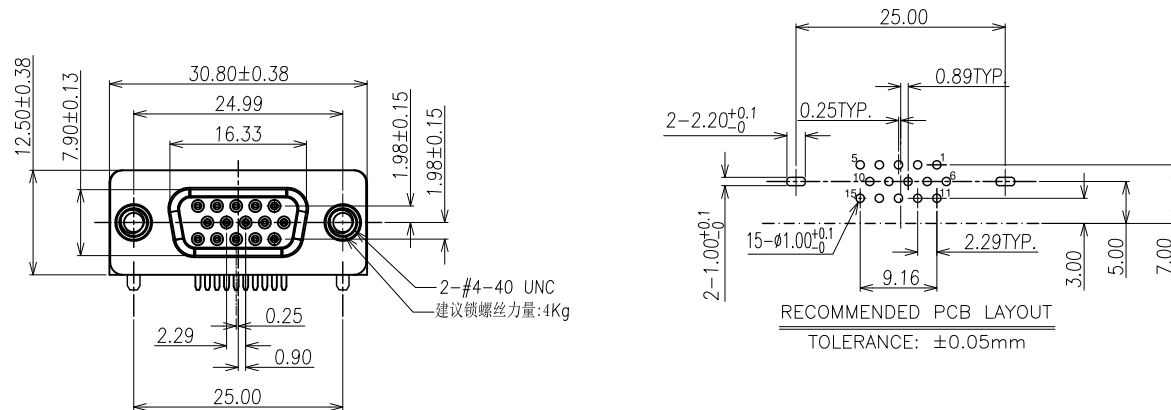

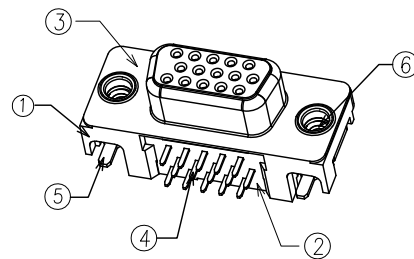
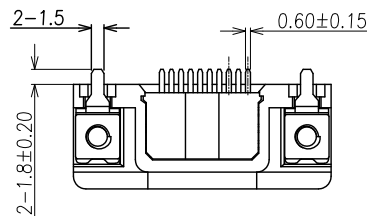


符合"DLK环境管理物质技术标准"

工程变更通知单 ECN(DCN) NO.	版本 REV	日期 DATE	说明 DESCRIPTION	改变 CHANGE	承认 APPRO.
KSECN24005	A	20240122	NEW RELEASE	——	——

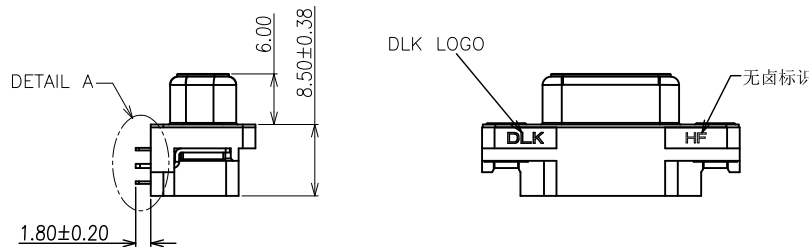

RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05mm



NOTE:
1. MATERIAL:
1.1 Housing/Cover: LCP UL94v-0, color: Black
1.2 Contact: Copper alloy
1.3 Shell: Ferro alloy
1.4 Rivet Insert:Ferro alloy
1.5 Rivet: Copper alloy
2. PLATING:
2.1 Contact: 1u"Au plated on contact Area,
100u" Min. Matte Tin plated on solder tail,
50u" Min.Nickel underplated
2.2 Shell: Nickel plated overall
3. MECHANICAL:
3.1 Insertion force:2.0~5.0kgf.
3.2 Withdrawal force:1.0Kgf Min.
3.3 Durability:500 cycles Min.
4 ELECTRICAL:
4.1 Current Rating:1.0A
4.2 Voltage Rating:36V
4.3 Dielectric strength:500V AC FOR 1 minute
4.4 Insulation Resistance:1000MΩ Min.
4.5 Contact Resistance:30mΩ Max
5. Operating Temperature:-55°c to +105°c
6. PACKING: Tray

6	RIVET	2	COPPER ALLOY	Ni PLATED
5	RIVET INSERT	2	FERROALLOY	Tin PLATED
4	Contact	15	COPPER ALLOY	Au And Tin plated
3	Shell	1	FERROALLOY	Ni PLATED
2	Cover	1	LCP	UL94V-0,Black
1	Housing	1	LCP	UL94V-0,Black
NO.	ITEM	Q'TY	DESCRIPTION	FINISH

GENERAL TOLERANCE UNLESS OTHERWISE NOTED		德力康电子科技有限公司 DLK DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD			
Angle	±5°				
X.	±0.35				
.X	±0.25				
.XX	±0.15				
.XXX	±0.10				
A4					
C 名称 TITLE:		D-SUB R/A 12.5H CONN			
FILE NAME:		C-DSB4M-0L-HF		料号 PART NO:	84M15B013L1
DRAWING		覃智森	CHECKED	——	APPROVED 段国强
UNIT:		mm	SCALE	1:1	SHEET: 1 of 1