
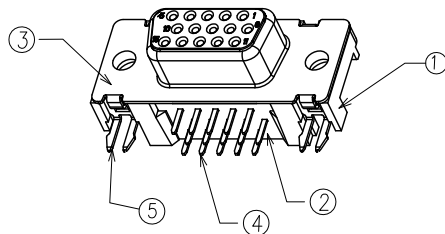



符合"DLK环境管理物质技术标准"

符合"IEC协会标准"

工程变更通知单 ECN(DCN) NO.	版本 REV	日期 DATE	说明 DESCRIPTION	改变 CHANGE	承认 APPRO.
KSECN16050	A	20160713	NEW RELEASE	——	——
KSECN16067	B	20160927	后盖增加逃料 $\triangle$ *1	万小龙	王永辉

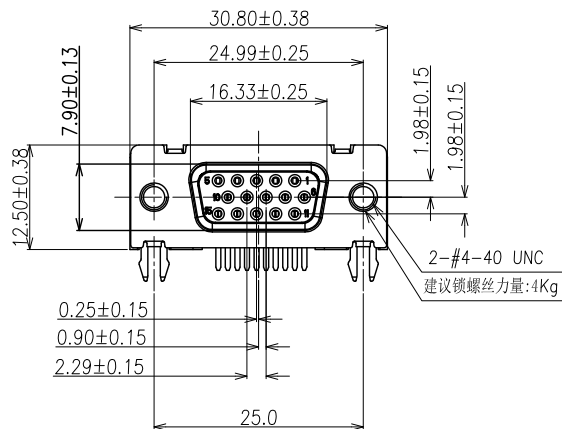

螺丝规格



1. 螺丝扭力为 $6.0\pm0.5\text{Kgf}$;
2. 所附螺丝数量为装箱数*2, 并在此基础上增加1%的螺丝数量, 用塑料袋包装并贴上标签;

NOTE:

1. MATERIAL:

1.1 Housing/Cover: PBT UL94v-0, color: Blue

1.2 Contact: Copper alloy

1.3 Shell: Ferro alloy

1.4 Rivet Insert:Ferro alloy

1.5 Screw: Ferro alloy

2. PLATING:

2.1 Contact: 1u"Au plated on contact Area,
100u" Min. Matte Tin plated on solder tail,
50u" Min.Nickel underplated

2.2 Shell: Nickel plated overall

3. MECHANICAL:

3.1 Insertion force:2.0~5.0kgf.

3.2 Withdrawal force:1.0Kgf Min.

3.3 Durability:500 cycles Min.

4 ELECTRICAL:

4.1 Current Rating:1.0A

4.2 Voltage Rating:36V





4.3 Dielectric strength:500V AC FOR 1 minute

4.4 Insulation Resistance:1000MΩ Min.

4.5 Contact Resistance:30mΩ Max

5. Operating Temperature:-55°c to +105°c

6. PACKING: Tray

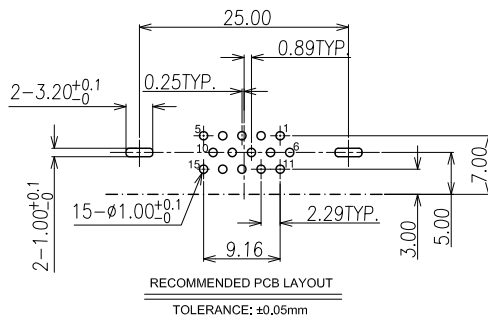

DETAIL A (2:1)

6	Screw	2	FERROALLOY	Nickel plated
5	RIVET INSERT	2	FERROALLOY	Tin PLATED
4	Contact	15	COPPER ALLOY	Au And Tin plated
3	Shell	1	FERROALLOY	Ni PLATED
2	Cover	1	PBT	UL94V-0,BLUE
1	Housing	1	PBT	UL94V-0,BLUE
NO.	ITEM	Q'TY	DESCRIPTION	FINISH

GENERAL TOLERANCE UNLESS OTHERWISE NOTED		德力康电子科技有限公司 DLK DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD				
Angle	±5°					
X.	±0.35					
.X	±0.25					
.XX	±0.15					
.XXX	±0.10					
A4						
UNIT:		mm	SCALE	1:1	SHEET: 1 of 1	