
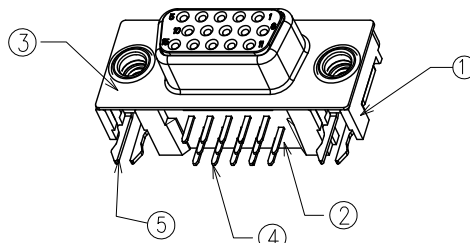



符合"DLK环境管理物质技术标准"

符合"IEC协会标准"

工程变更通知单 ECN(DCN) NO.	版本 REV	日期 DATE	说明 DESCRIPTION	变更 CHANGE	核准 APPRO.
KSECN15005	A	20150309	NEW RELEASE	—	—
KSECN16067	B	20160927	后盖增加逃料 $\triangle$ *1	万小龙	王永辉
KSECN18038	C	20190402	增加锁螺丝和附螺丝料号 $\triangle$ *1	王永辉	严成旺

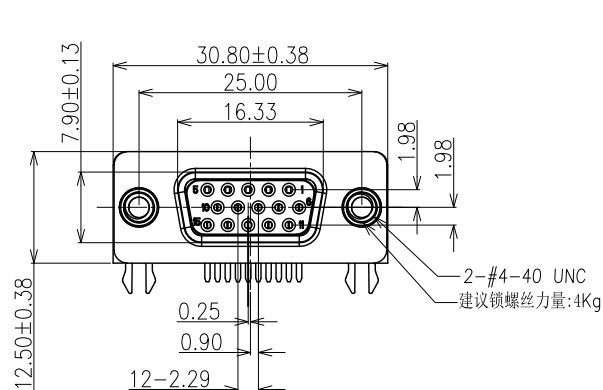

螺丝规格



- 螺丝扭力为 6.0 ± 0.5 Kgf;
- 所附螺丝数量为装箱数*2, 并在此基础上增加1%的螺丝数量, 用塑料袋包装并贴上标签;

NOTE:

1. MATERIAL:

1.1 Housing/Cover: PBT UL94v-0, color: Blue

1.2 Contact: Copper alloy

1.3 Shell: Ferro alloy

1.4 Rivet Insert: Ferro alloy

1.5 RIVET: Copper alloy

1.6 Screw: Ferro alloy

2. PLATING:

2.1 Contact: 1u"Au plated on contact Area, 100u" Min. Matte Tin plated on solder tail, 50u" Min. Nickel underplated

2.2 Shell: Nickel plated overall

3. MECHANICAL:

3.1 Insertion force: 2.0~5.0kgf.

3.2 Withdrawal force: 1.0Kgf Min.

3.3 Durability: 500 cycles Min.

4 ELECTRICAL:

4.1 Current Rating: 1.0A

4.2 Voltage Rating: 36V




4.3 Dielectric strength: 500V AC FOR 1 minute

4.4 Insulation Resistance: 1000M Ω Min.



4.5 Contact Resistance: 30m Ω Max

5. Operating Temperature: -55°C to +105°C

6. PACKING: Tray



DLK LOGO

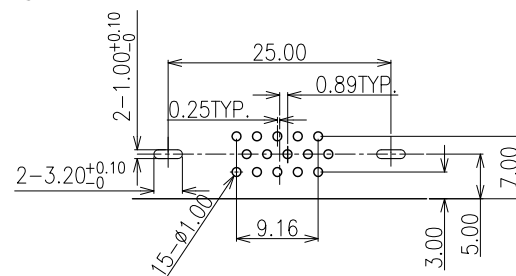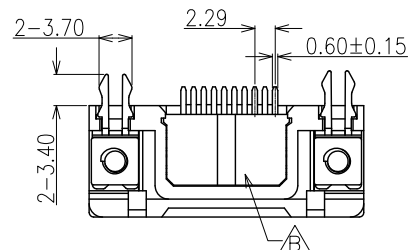

RECOMMENDED PCB LAYOUT
TOLERANCE: ± 0.05 mm

7	Screw	2	FERROALLOY	Nickel plated
6	RIVET	2	COPPER ALLOY	Ni PLATED
5	Rivet insert	2	FERROALLOY	Tin PLATED
4	Contact	15	COPPER ALLOY	Au AND Tin PLATED
3	Shell	1	FERROALLOY	Ni PLATED
2	Cover	1	PBT+GF30	UL94V-0, Black
1	Housing	1	PBT+GF30	UL94V-0, BLUE
NO.	ITEM	Q'TY	DESCRIPTION	FINISH

GENERAL TOLERANCE
UNLESS OTHERWISE NOTED

Angle	$\pm 5^\circ$
X.	± 0.35
.X	± 0.25
.XX	± 0.15
.XXX	± 0.10

A4



德力康电子科技有限公司

DLK DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD

C 名称
TITLE: D-SUB R/A 12.5H CONN 附螺丝

档案名称
FILE NAME: C-DSB4W-00-0P 料号
PART NO: 84W15L01340

DRAWING 王永辉 CHECKED 严成旺 APPROVED 严成旺

UNIT: mm SCALE 1:1 SHEET: 1 of 1