
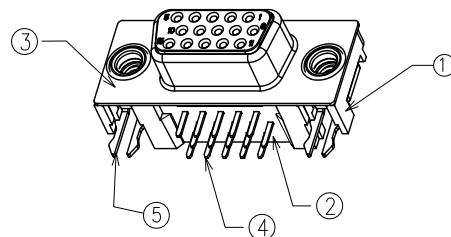



符合"DLK环境管理物质技术标准"

符合"IEC协会标准"

工程变更通知单 ECN(DCN) NO.	版本 REV	日期 DATE	说明 DESCRIPTION	变更 CHANGE	核准 APPRO.
KSECN18036	A	20181023	NEW RELEASE	—	—

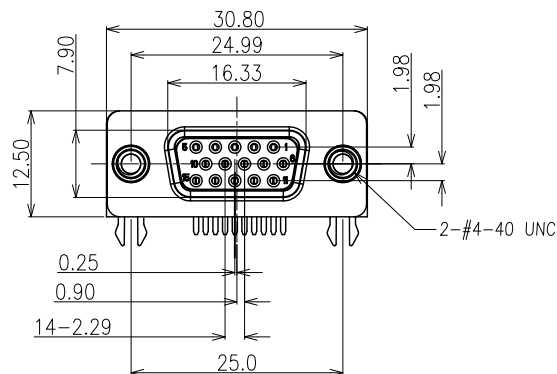

螺丝规格



- 螺丝扭力为6.0±0.5KG;
- 所附螺丝数量为装箱数*2, 并在此基础上增加1%的螺丝数量, 用塑料袋包装并贴上标签;






NOTE:

1. MATERIAL:

- 1.1 Housing/Cover: PBT UL94v-0, color: Black
- 1.2 Contact: Copper alloy
- 1.3 Shell: Ferro alloy
- 1.4 Rivet Insert:Ferro alloy
- 1.5 Rivet: Copper alloy
- 1.6 Screw: Ferro alloy

2. PLATING:

- 2.1 Contact: 1u"Au plated on contact Area, 100u" Min. Matte Tin plated on solder tail, 50u" Min.Nickel underplated
 - 2.2 Shell: Nickel plated overall
3. MECHANICAL:
- 3.1 Insertion force:2.0~5.0kgf.
 - 3.2 Withdrawal force:1.0Kg Min.
 - 3.3 Durability:500 cycles Min.
- 4 ELECTRICAL:
- 4.1 Current Rating:1.0A
 - 4.2 Voltage Rating:36V
 - 4.3 Dielectric strength:500V AC FOR 1 minute
 - 4.4 Insulation Resistance:1000MQ Min.
 - 4.5 Contact Resistance:30mΩ Max
 5. Operating Temperature:-55°c to +105°c
 6. PACKING: Tray

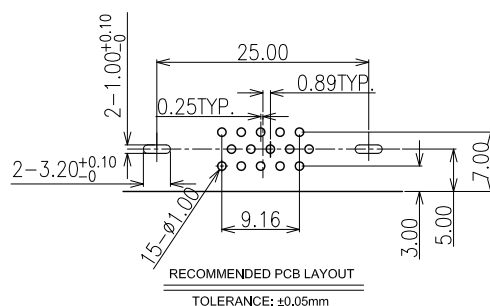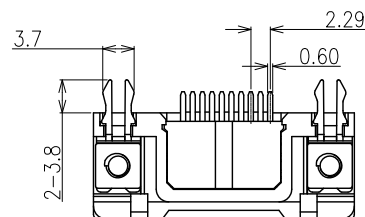

7	SCREW	2	FERROALLOY	Ni PLATED
6	RIVET	2	COPPER ALLOY	Ni PLATED
5	RIVET INSERT	2	FERROALLOY	Tin PLATED
4	Contact	15	COPPER ALLOY	Au AND Tin PLATED
3	Shell	1	FERROALLOY	Ni PLATED
2	Cover	1	PBT+GF30 HF	UL94V-0,Black
1	Housing	1	PBT+GF30 HF	UL94V-0,Black
NO.	ITEM	Q'TY	DESCRIPTION	FINISH

GENERAL TOLERANCE
UNLESS OTHERWISE NOTED

Angle	±5°
X.	±0.35
.X	±0.25
.XX	±0.15
.XXX	±0.10



德力康电子科技有限公司
DLK DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD

C	名称 TITLE:	D-SUB R/A 12.5H CONN 附螺丝
档案名称 FILE NAME:	C-DSB6R-00-00HF	料号 PART NO:
DRAWING	张志兵	CHECKED
UNIT:	mm	SCALE
1:1	SHEET: 1 of 1	APPROVED
严成旺		