
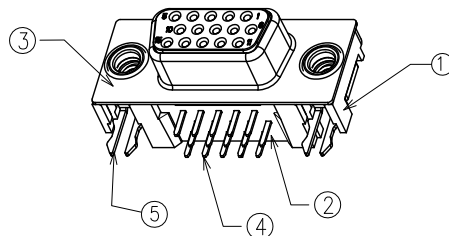



符合"DLK环境管理物质技术标准"

符合"IEC协会标准"

工程变更通知单 ECN(DCN) NO.	版本 REV	日期 DATE	说明 DESCRIPTION	变更 CHANGE	核准 APPRO.
KSECN18036	A	20181023	NEW RELEASE	—	—

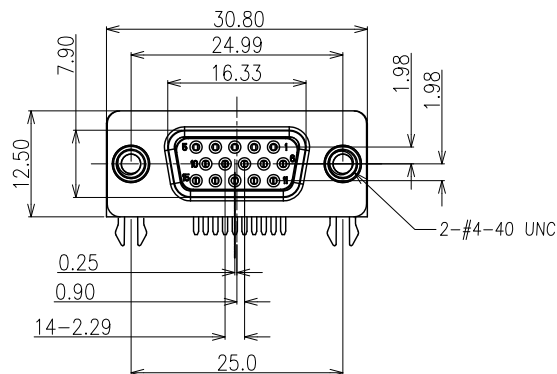






螺丝规格



- 螺丝扭力为6.0±0.5Kgf;
- 所附螺丝数量为装箱数*2, 并在此基础上增加1%的螺丝数量, 用塑料袋包装并贴上标签;

NOTE:

- MATERIAL:
 - Housing/Cover: PBT UL94v-0, color: Blue
 - Contact: Copper alloy
 - Shell: Ferro alloy
 - Rivet Insert:Ferro alloy
 - Rivet: Copper alloy
 - Screw: Ferro alloy
- PLATING:
 - Contact: 1u"Au plated on contact Area, 100u" Min. Matte Tin plated on solder tail, 50u" Min.Nickel underplated
- MECHANICAL:
 - Insertion force:2.0~5.0kgf.
 - Withdrawal force:1.0Kgf Min.
 - Durability:500 cycles Min.
- ELECTRICAL:
 - Current Rating:1.0A
 - Voltage Rating:36V
 - Dielectric strength:500V AC FOR 1 minute
 - Insulation Resistance:1000MQ Min.
 - Contact Resistance:30mΩ Max
 - Operating Temperature:-55°c to +105°c
- PACKING: Tray

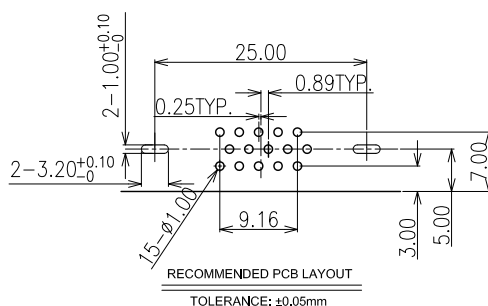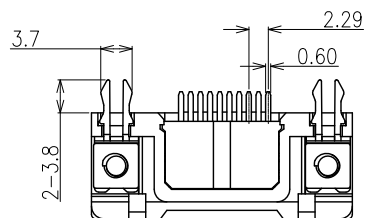

7	SCREW	2	FERROALLOY	Ni PLATED
6	RIVET	2	COPPER ALLOY	Ni PLATED
5	RIVET INSERT	2	FERROALLOY	Tin PLATED
4	Contact	15	COPPER ALLOY	Au AND Tin PLATED
3	Shell	1	FERROALLOY	Ni PLATED
2	Cover	1	PBT+GF30 HF	UL94V-0,BLUE
1	Housing	1	PBT+GF30 HF	UL94V-0,BLUE
NO.	ITEM	Q'TY	DESCRIPTION	FINISH

GENERAL TOLERANCE
UNLESS OTHERWISE NOTED

Angle	±5°
X.	±0.35
.X	±0.25
.XX	±0.15
.XXX	±0.10
A4	



德力康电子科技有限公司
DLK DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD

C	名称 TITLE:	D-SUB R/A 12.5H CONN 附螺丝				
	档案名称 FILE NAME:	C-DSB6R-00-00HF	料号 PART NO:	86R15L01321		
	DRAWING	张志兵	CHECKED	——	APPROVED	严成旺
	UNIT:	mm	SCALE	1:1	SHEET: 1 of 1	