
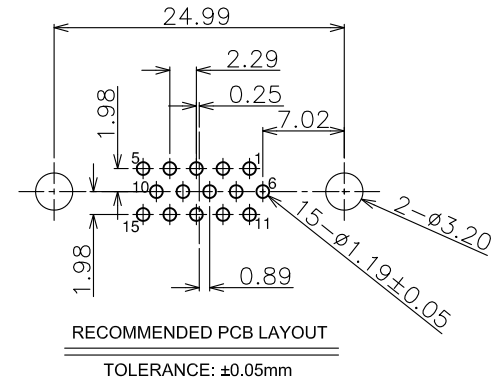


符合"DLK环境管理物质技术标准"

符合"IEC协会标准"

工程变更通知单 ECN(DCN) NO.	版本 REV	日期 DATE	说明 DESCRIPTION	改变 CHANGE	承认 APPRO.
KSECN20052	A	20201214	NEW RELEASE	—	—

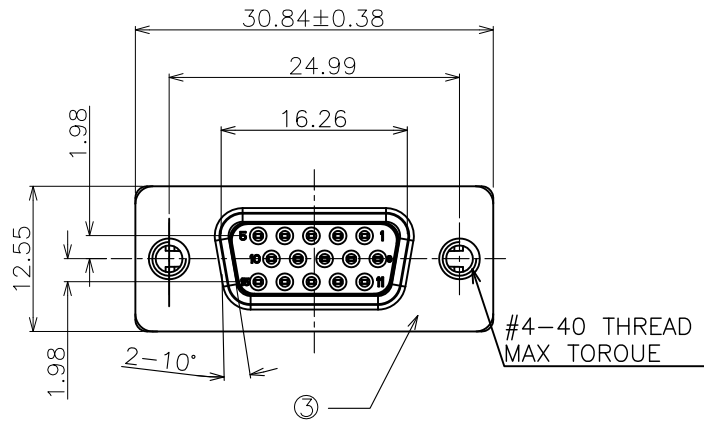

NOTE:

1. MATERIAL:

1.1 Housing/Cover: PBT UL94v-0, color: Black

1.2 Contact: Copper alloy

1.3 Shell: Ferro alloy

1.4 Rivet Insert:Ferro alloy

2. PLATING:

2.1 Contact: 1u"Au plated on contact Area,
100u" Min. Matte Tin plated on solder tail,
50u" Min.Nickel underplated

2.2 Shell: Nickel plated overall

3. MECHANICAL:

3.1 Insertion force:2.0~5.0kgf.

3.2 Withdrawal force:1.0Kgf Min.

3.3 Durability:500 cycles Min.

4 ELECTRICAL:

4.1 Current Rating:1.0A

4.2 Voltage Rating:36V



4.3 Dielectric strength:500V AC FOR 1 minute

4.4 Insulation Resistance:1000MΩ Min.

4.5 Contact Resistance:30mΩ Max

5. Operating Temperature:-55°c to +105°c

6. PACKING: Tray

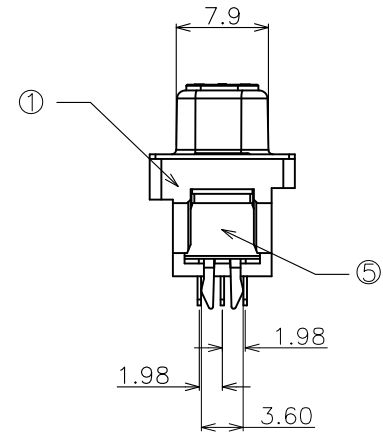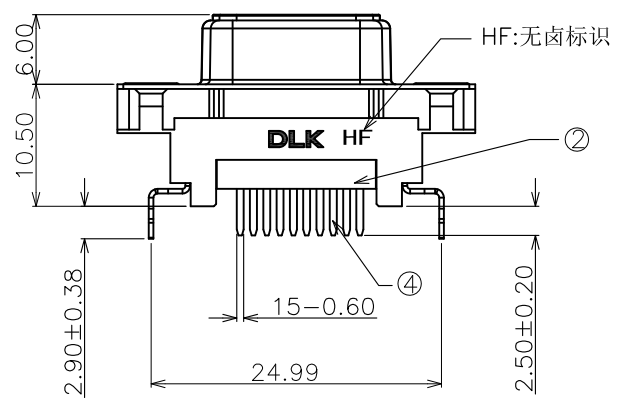

5	RIVET INSERT	2	FERROALLOY	Tin PLATED
4	CONTACT	15	COPPER ALLOY	Au AND Tin PLATED
3	SHELL	1	FERROALLOY	Ni PLATED
2	COVER	1	PBT HF	UL94V-0
1	HOUSING	1	PBT HF	UL94V-0
NO.	ITEM	Q'TY	DESCRIPTION	FINISH

GENERAL TOLERANCE UNLESS OTHERWISE NOTED		 德力康电子科技有限公司 DLK DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD						
Angle ±5°								
X.	±0.35	C 名称 TITLE: 档案名称 FILE NAME: DRAWING UNIT:	D-SUB 立式 10.5H PIN脚2.5 无螺丝 带铆钉结构					
.X	±0.25		C-DSB6T-00-HF	料号 PART NO:	86T15B01301			
.XX	±0.15		蒋 召	CHECKED	——	APPROVED	覃智森	
.XXX	±0.10				1:1	SHEET: 1 of 1		
A4								