
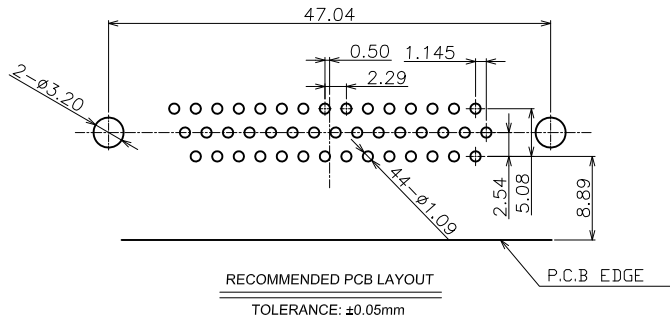
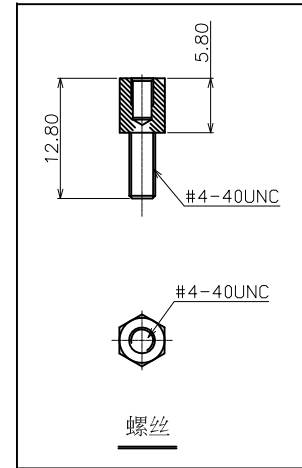

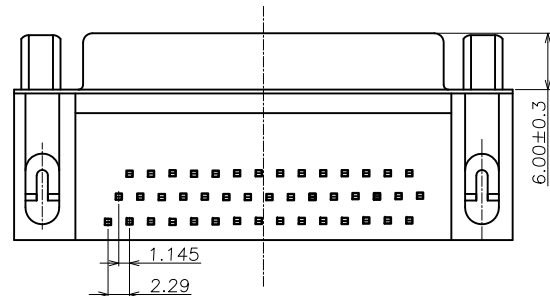


符合"DLK环境管理物质技术标准"

|                         |           |            |                   |              |              |
|-------------------------|-----------|------------|-------------------|--------------|--------------|
| 工程变更通知单<br>ECN(DCN) NO. | 版本<br>REV | 日期<br>DATE | 说明<br>DESCRIPTION | 改变<br>CHANGE | 承认<br>APPRO. |
| KSECN24017              | A         | 20240409   | NEW RELEASE       | —            | —            |
|                         |           |            |                   |              |              |

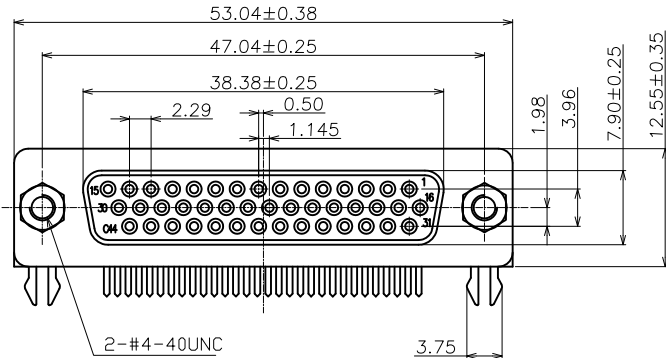

NOTE:

1. MATERIAL:

- Housing/Cover: PBT UL94v-0, color: Blue
- Contact: Copper alloy
- Shell: Ferro alloy
- Rivet Insert:Ferro alloy
- Rivet: Copper alloy
- Screw:Ferro alloy

2. PLATING:

- Contact: 1u"Au plated on contact Area, 100u" Min. Matte Tin plated on solder tail, 50u" Min.Nickel underplated
  - Shell: Nickel plated overall
3. MECHANICAL:
- Insertion force:14.60kgf Max.
  - Withdrawal force:1.25-9.8Kgf.
  - Durability:500 cycles Min.
- 4 ELECTRICAL:
- Current Rating:1.0A
  - Voltage Rating:100V AC
  - Dielectric strength:1000V AC FOR 1 minute
  - Insulation Resistance:1000MΩ Min.
  - Contact Resistance:20mΩ Max
5. Operating Temperature:-55°c to +105°c
6. PACKING: Tray

|     |              |      |              |                   |
|-----|--------------|------|--------------|-------------------|
| 7   | SCREW        | 2    | STEEL        | Ni PLATED         |
| 6   | RIVET        | 2    | COPPER ALLOY | Ni PLATED         |
| 5   | COVER        | 1    | PBT+30%G/F   | UL94V-0 BLACK     |
| 4   | RIVET INSERT | 2    | SK5          | Tin PLATED        |
| 3   | SHELL        | 1    | SPCC         | Ni PLATED         |
| 2   | CONTACT      | 44   | BRASS        | Au AND Tin PLATED |
| 1   | INSULATOR    | 1    | PBT+30%G/F   | UL94V-0 Black     |
| NO. | ITEM         | Q'TY | DESCRIPTION  | FINISH            |

GENERAL TOLERANCE  
UNLESS OTHERWISE NOTED

|       |       |
|-------|-------|
| Angle | ±5°   |
| X.    | ±0.35 |
| .X    | ±0.25 |
| .XX   | ±0.15 |
| .XXX  | ±0.10 |
| A4    | ⌀     |

|                                                                                                                                                  |                 |                |             |               |
|--------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------------|-------------|---------------|
|  德力康电子科技有限公司<br>DLK DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD |                 |                |             |               |
| C 名称<br>TITLE                                                                                                                                    | HDR-44P 母半金锡 铆锁 |                |             |               |
| 档案名称<br>FILE NAME.                                                                                                                               | C-DSB8N-00-01   | 料号<br>PART NO. | 88N44B21310 |               |
| DRAWING                                                                                                                                          | 蒋 召             | CHECKED        | 覃智森         | 段国强           |
| UNIT:                                                                                                                                            | mm              | SCALE          | 1:1         | SHEET: 1 of 1 |