


REVISION			
LTR	DESCRIPTION	DATE	APPROVED
A	NEW RELEASE	01/16/96	H.T.

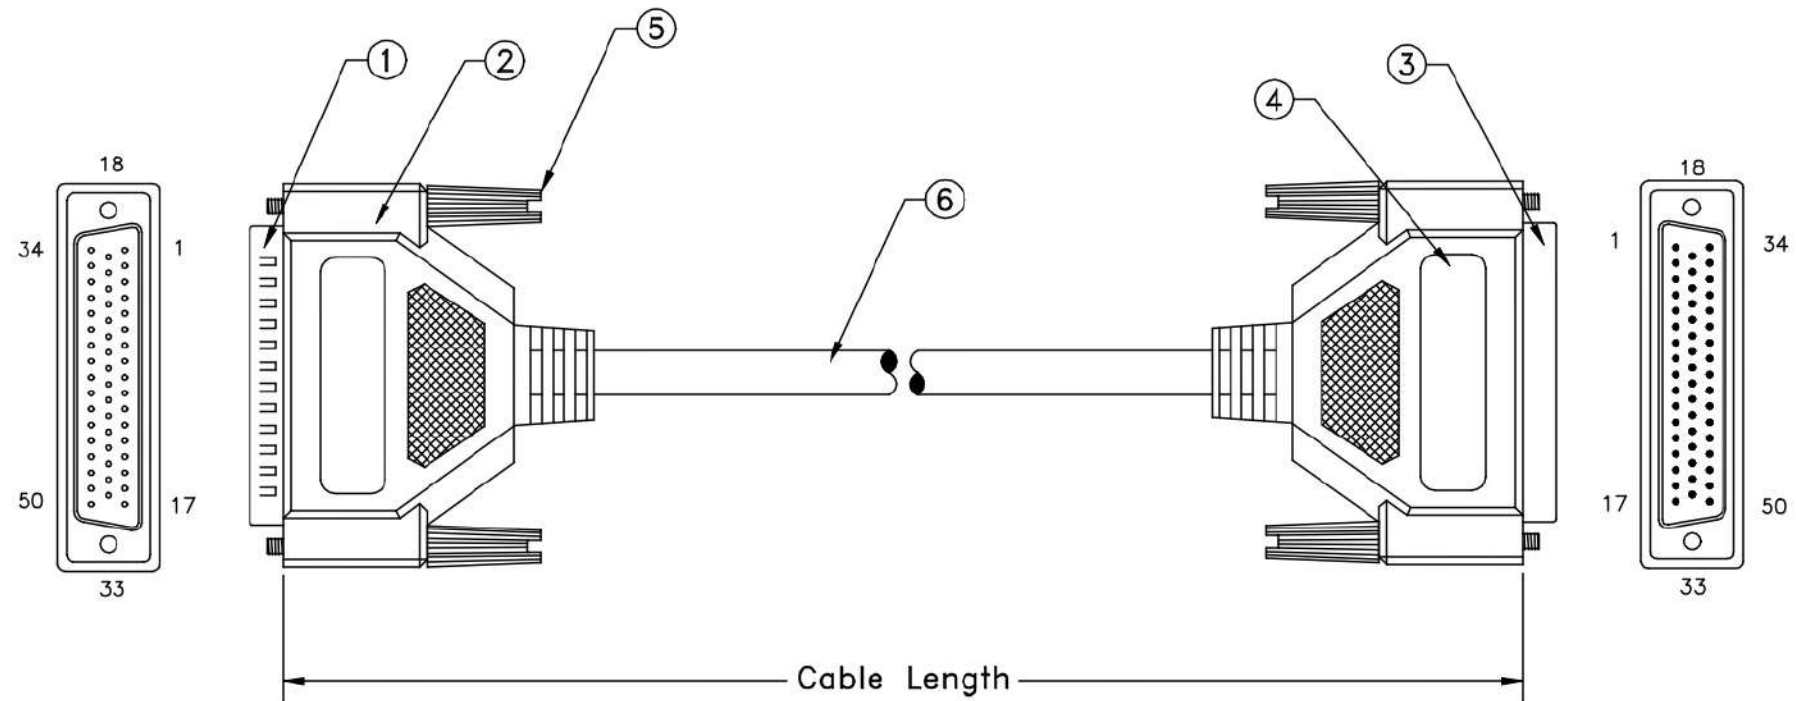

6.	28 AWG., 50 Conductors + Drain Wire, Single Shielded, with AL-FOIL & Copper Braid, Beige Outer PVC jacket	XX	FT.
5.	4/40 Molded Thumb Screw, Color Beige	4	PCS.
4.	Beige Molded PVC Hood, Fully Shielded w /Aluminum Mylar Foil	1	PCS.
3.	D-Sub 50 Pin Female w/Gold Plating Contacts	1	PCS.
2.	Beige Molded PVC Hood, Fully Shielded w /Aluminum Mylar Foil	1	PCS.
1.	D-Sub 50 Pin Male, w/Gold Plating Contacts	1	PCS.
ITEM NO.	MATERIAL / SPECIFICATION	QTY REQD	UNIT
CABLE ASSEMBLY PARTS LIST			

UNLESS OTHERWISE SPECIFIED:
1. DIMENSION ARE IN INCHS
2. TOLERANCES:
DECIMALES X.XX ±0.25
3. DO NOT SCALE DRAWING
4. REMOVE ALL BURRS AND BREAK SHARP EDGES.

PROPRIETARY DOCUMENT

THIS DRAWING AND/OR INFORMATION OR SUBJECT MATTER CONTAINED HEREIN, SHALL NOT BE USED, COPIED OR DISSEMINATED IN ANY MANNER, OR FOR ANY PURPOSE, OTHER THAN AS EXPRESSLY STATED BY COMTOP Enterprises Corp.

CUSTOMER	
R.F.Q. NO.	
DRAWN	DATE
Howie Tseng	01/16/96
CHECKED	
CUSTOMER APPROVAL	

CompuCableUSA

TITLE DB50M / DB50F Molded Cable Assembly (50C, Straight Through)			
SIZE	DWG NO.	PART NO.	REV.
	DMC-50MF-XXB	DMC-50MF-10B	A
SCALE: NONE	RELEASE DATE: 01/16/96	SHEET: 1 OF 1	