



符合"DLK环境管理物质技术标准"




工程变更通知单 ECN(DCN) NO.	版本 REV	日期 DATE	说明 DESCRIPTION	改变 CHANGE	承认 APPRO.
KSECN17049	A	20170823	NEW RELEASE	—	—

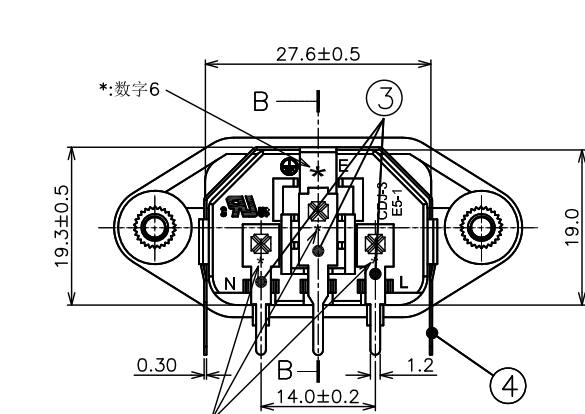

*:数字6.0,正面有字,反面无字。
正反方向无要求。

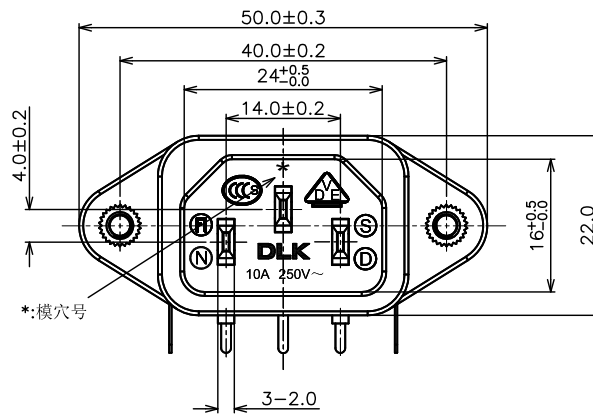

NOTE:
1. MATERIAL:
1.1 Housing: PA66 UL94v-0, color: Black
1.2 Contact: Copper alloy
1.3 Soldering Pin: Copper alloy
1.4 Soldering Pin: Ferro alloy
1.5 Nut: Copper alloy
2. PLATING:
2.1 Contact: Nickel plated overall
2.2 Soldering Pin: Sn plated, Nickel underplated
3. MECHANICAL:
3.1 Mating force: 10~50N
3.2 Unmating force: 60N Max
3.3 Durability: 5000 cycles
4. ELECTRICAL:
4.1 Current Rating: 2.5/7A
4.2 Voltage Rating: 125/250V
4.3 Dielectric strength: 2000V AC FOR 1 minute
4.4 Insulation Resistance: 100MΩ Min.
4.5 Contact Resistance: 30mΩ Max
5. Operating Temperature: -55°C to +85°C
6. PACKING: BDX

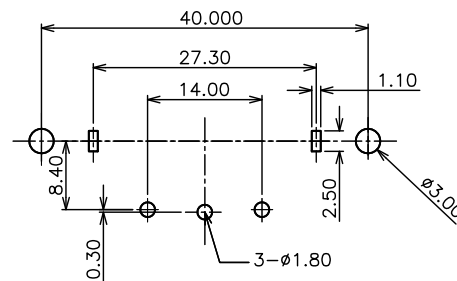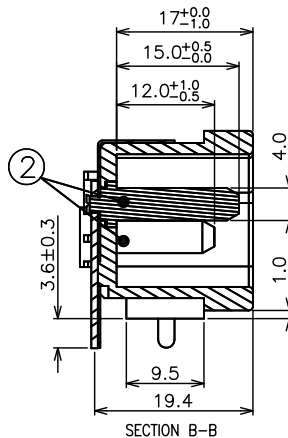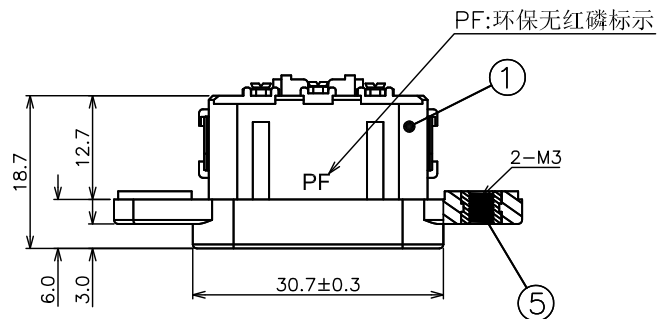

RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05mm

5	NUT	2	Copper alloy	NO Plated
4	Soldering Pin	1	Ferro alloy	TIN
3	Soldering Pin	3	Copper alloy	TIN
2	Contact Pin	3	Copper alloy	NICKEL
1	INSULATOR	1	PA66 UL 94V-0	BLACK
NO.	ITEM	Q'TY	DESCRIPTION	FINISH

GENERAL TOLERANCE
UNLESS OTHERWISE NOTED

Angle	±5°
X.	±0.35
.X	±0.25
.XX	±0.15
.XXX	±0.10
A4	±0.10

 德力康电子科技有限公司 DLK DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD					
C	名称 TITLE:	CDJ-3E5-SBT-1PF			
档案名称 FILE NAME:		C-ACT5E-00-OC PF	料号 PART NO:	75E03B430C2	
DRAWING	汪庆	CHECKED	王永辉	APPROVED	严成旺
UNIT:	mm	SCALE	1:1	SHEET:	1 of 1

德力康电子科技有限公司
DLK DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD