

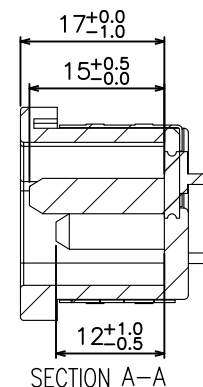
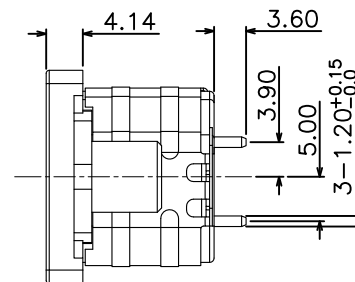
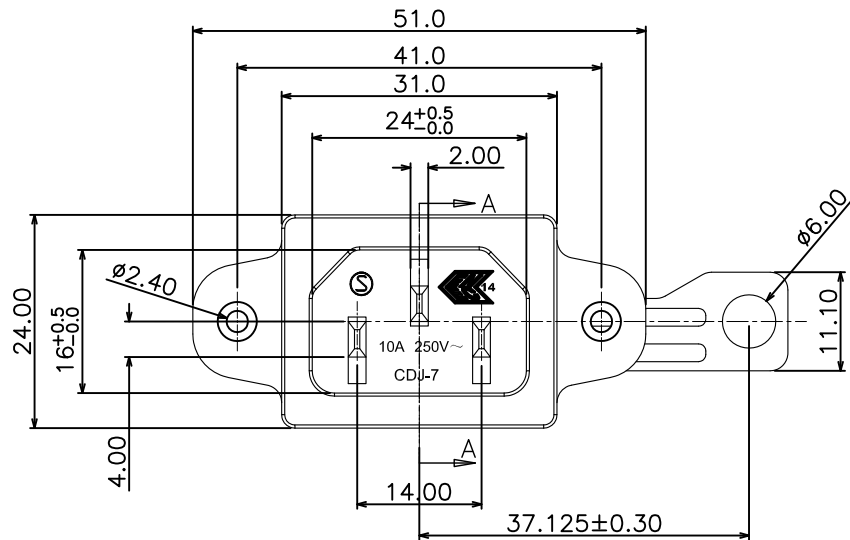


符合"DLK环境管理物质技术标准"

工程变更通知单 ECN(DCN) NO.	版本 REV	日期 DATE	说明 DESCRIPTION	改变 CHANGE	承认 APPRO.
KSECN22045	A	20221024	NEW RELEASE	—	—

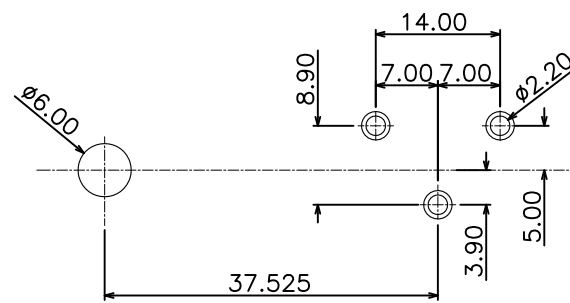

- NOTE:
- MATERIAL:
 - Housing: PA66 UL94v-0, color: Black
 - Contact: Copper alloy
 - Soldering Pin: Ferro alloy
 - PLATING:
 - Contact: Nickel plated overall
 - Soldering Pin: Sn plated, Nickel underplated
 - MECHANICAL:
 - Mating force: 10~50N
 - Unmating force: 60N Max
 - Durability: 5000 cycles
 - ELECTRICAL:
 - Current Rating: 2.5/7A
 - Voltage Rating: 125/250V
 - Dielectric strength: 2000V AC FOR 1 minute
 - Insulation Resistance: 100MQ Min.
 - Contact Resistance: 30mΩ Max
 - Operating Temperature: -55°C to +85°C
 - PACKING: BOX

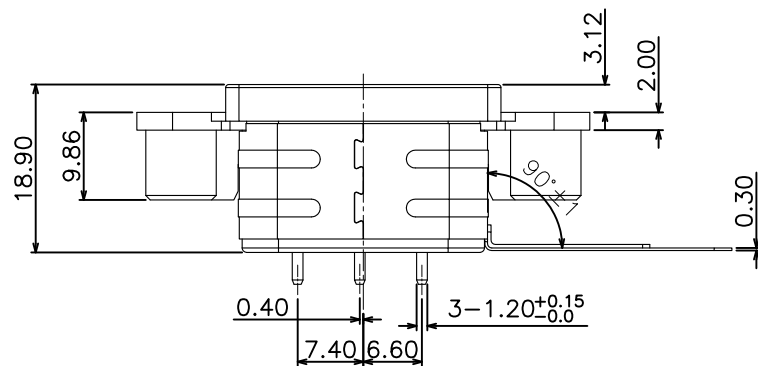

RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05mm

3	Soldering Pin	1	Ferro alloy	No Plating
2	CONTACT	3	Copper alloy	TIN120u" over Ni 50u"
1	INSULATOR	1	NYLON UL 94V-0	BLACK
NO.	ITEM	QTY	DESCRIPTION	FINISH

GENERAL TOLERANCE
UNLESS OTHERWISE NOTED

Angle	±5°
X.	±0.35
.X	±0.25
.XX	±0.15
.XXX	±0.10
A4	

 德力康电子科技有限公司
DLK DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD

C 名称 TITLE:	AC Molding 3PIN SOCKET 带尾巴马口铁			
档案名称 FILE NAME:	C-ACT5M-00-21	料号 PART NO:	75M03B43213	
DRAWING	蒋台	CHECKED	覃智森	APPROVED 吴豪
UNIT:	mm	SCALE	1:1	SHEET: 1 of 1

1 2 3 4 5 6 7 8 9 10 11

1 2 3 4 5 6 7 8 9 10 11