

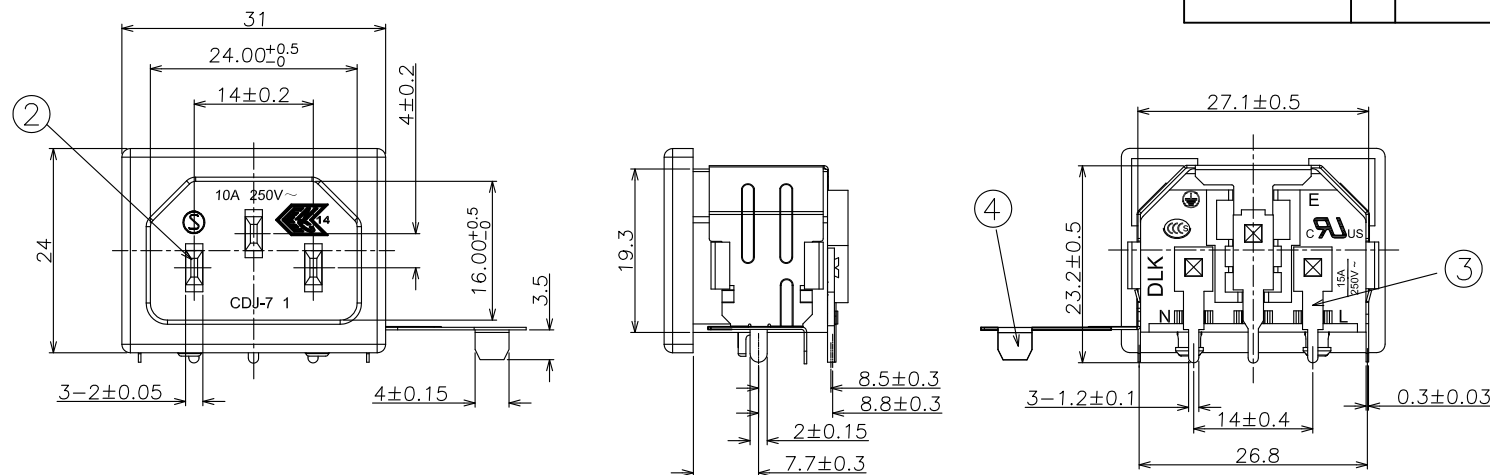


工程变更通知单 ECN(DCN) NO.	版本 REV	日期 DATE	说明 DESCRIPTION	改变 CHANGE	承认 APPRO.
KSECN21017	A	20210301	NEW RELEASE	——	——

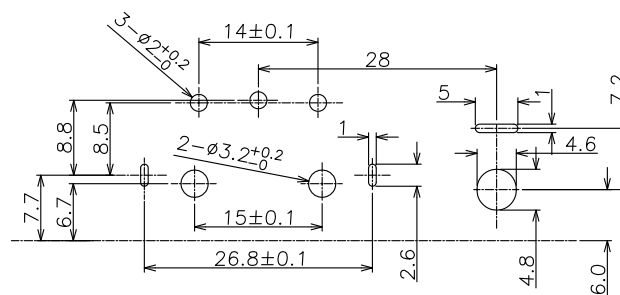

1. MATERIAL:
 - 1.1 Housing: PA66 UL94v-0, color: Black
 - 1.2 Contact: Copper alloy
 - 1.3 Soldering Pin: Copper alloy
 - 1.4 Soldering Pin: Ferro alloy
2. PLATING:
 - 2.1 Contact: Nickel plated overall
 - 2.2 Soldering Pin: Sn plated,Nickel underplated
3. MECHANICAL:
 - 3.1 Mating force: 10~50N
 - 3.2 Unmating force: 60N Max
 - 3.3 Durability: 5000 cycles
4. ELECTRICAL:
 - 4.1 Current Rating:2.5/7A
 - 4.2 Voltage Rating:125/250V
 - 4.3 Dielectric strength:2000V AC FOR 1 minute
 - 4.4 Insulation Resistance:100M Ω Min.
 - 4.5 Contact Resistance:30m Ω Max
5. Operating Temperature:-55°c to +85°c
6. PACKING: Tray

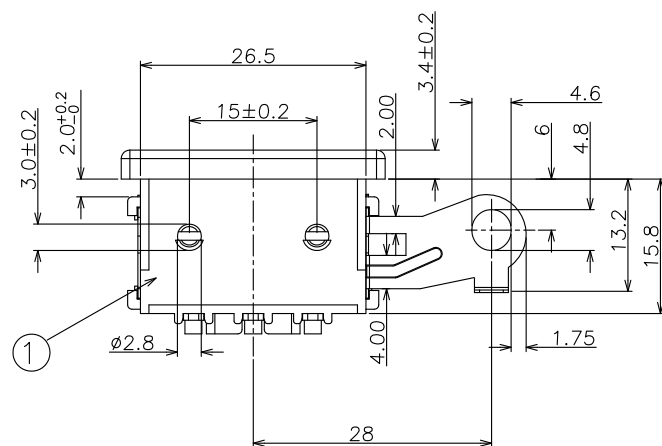

RECOMMENDED PCB PLAYOUT

TOLERANCE: $\pm 0.05\text{mm}$

4	Soldering Pin	1	Ferro alloy	Tin
3	Soldering Pin	3	Copper alloy	Tin
2	Contact Pin	3	Copper alloy	Nickel
1	Housing	1	PA66 UL 94-V0	Black
NO.	ITEM	Q'TY	DESCRIPTION	FINISH

**GENERAL TOLERANCE
UNLESS OTHERWISE NOTED**

	Angle	$\pm 5^\circ$
	X.	± 0.35
	.X	± 0.25
	.XX	± 0.15
	.XXX	± 0.10
A4		



德力康电子科技有限公司



DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD

C	名称 TITLE:	AC 90D 帶右耳馬口鐵				
5	檔案名稱 FILE NAME:	C-ACT7K-00-01	料號 PART NO:	77K03B43010		
5	DRAWING	蔣 召	CHECKED	——	APPROVED	覃智森
0	UNIT:	mm	SCALE	1:1	SHEET: 1 of 1	