
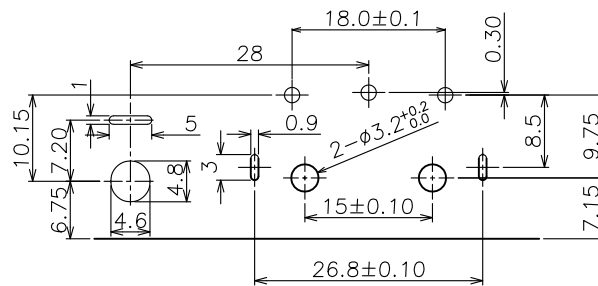
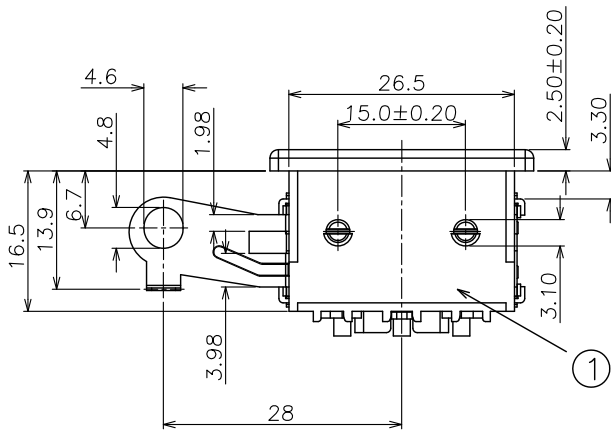
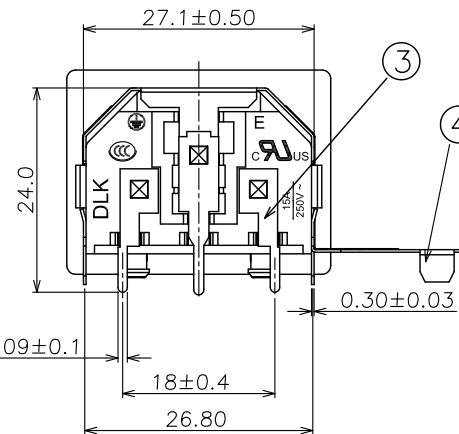
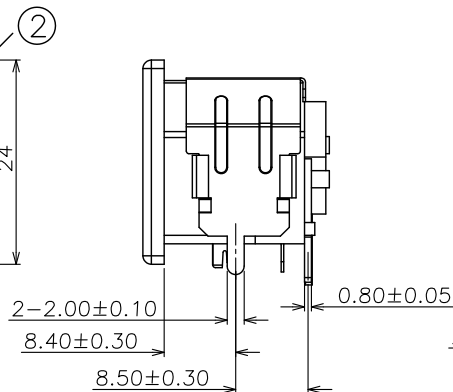


符合"DLK环境管理物质技术标准"

工程变更通知单 ECN(DCN) NO.	版本 REV	日期 DATE	说明 DESCRIPTION	改变 CHANGE	承认 APPRO.
KSECR22036	A	20220907	NEW RELEASE	—	—

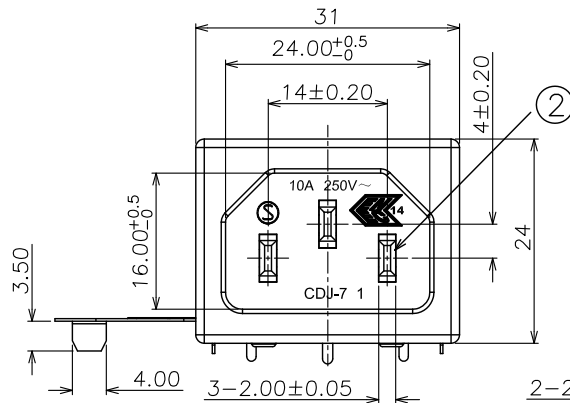

RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05mm

NOTE:

1. MATERIAL:

1.1 Housing: PA66 UL94v-0, color: Black

1.2 Contact: Copper alloy

1.3 Soldering Pin: Copper alloy

1.4 Soldering Pin: Ferro alloy

2. PLATING:

2.1 Contact: Nickel plated overall

2.2 Soldering Pin: Sn plated, Nickel underplated

3. MECHANICAL:

3.1 Mating force: 10~50N

3.2 Unmating force: 60N Max

3.3 Durability: 5000 cycles

4. ELECTRICAL:

4.1 Current Rating: 2.5/7A

4.2 Voltage Rating: 125/250V

4.3 Dielectric strength: 2000V AC FOR 1 minute

4.4 Insulation Resistance: 100MΩ Min.

4.5 Contact Resistance: 30mΩ Max

5. Operating Temperature: -55°C to +85°C

6. PACKING: Tray

4	Soldering Pin	1	Ferro alloy	Tin
3	Soldering Pin	3	Copper alloy	Tin
2	Contact Pin	3	Copper alloy	Nickel
1	Housing	1	PA66 UL 94-V0	Black
NO.	ITEM	Q'TY	DESCRIPTION	FINISH

GENERAL TOLERANCE
UNLESS OTHERWISE NOTED

Angle	±5°
X.	±0.35
.X	±0.25
.XX	±0.15
.XXX	±0.10
A4	⌀



德力康电子科技有限公司

DLK

DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD

C 名称 TITLE:	AC 90D 19H 左侧带接地导电片铁壳			
档案名称 FILE NAME:	C-ACT7K-00-22	料号 PART NO:	77K03B43220	
DRAWING	蒋 召	CHECKED	覃智森	APPROVED 吴豪
UNIT:	mm	SCALE	1:1	SHEET: 1 of 1