
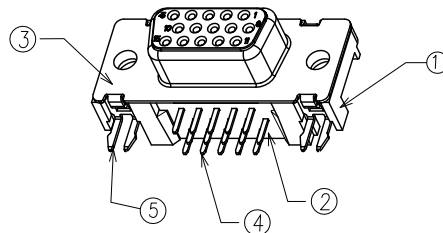



符合"DLK环境管理物质技术标准"

符合"IEC协会标准"

工程变更通知单 ECN(DCN) NO.	版本 REV	日期 DATE	说明 DESCRIPTION	改变 CHANGE	承认 APPRO.
KSECN15039	B	20150901	增加DSB4XD-15BM1YN30料号 Δ *1	王永辉	严成旺
KSECN16067	C	20160927	后盖增加速料 Δ *1	万小龙	王永辉
KSECN18064	D	20181204	鱼叉脚卡板尺寸公差由 3.30 ± 0.15 改为 $3.30^{+0.15}_{-0.10}$ Δ *1	王永辉	严成旺

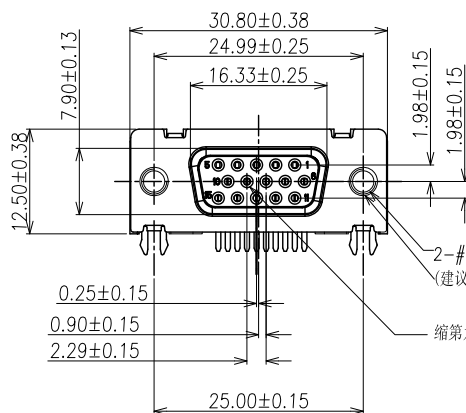

螺丝规格



- 螺丝扭力为 6.0 ± 0.5 Kgf;
- 所附螺丝数量为装箱数*2, 并在此基础上增加1%的螺丝数量, 用塑料袋包装并贴上标签;

NOTE:

1. MATERIAL:

1.1 Housing/Cover: PBT UL94v-0, color: Black

1.2 Contact: Copper alloy

1.3 Shell: Ferro alloy

1.4 Rivet Insert:Ferro alloy

1.5 Screw:Ferro alloy

2. PLATING:

2.1 Contact: 1u"Au plated on contact Area, 100u" Min. Matte Tin plated on solder tail, 50u" Min.Nickel underplated

2.2 Shell: Nickel plated overall

3. MECHANICAL:

3.1 Insertion force:2.0~5.0kgf.

3.2 Withdrawal force:1.0Kgf Min.

3.3 Durability:500 cycles Min.

4 ELECTRICAL:

4.1 Current Rating:1.0A

4.2 Voltage Rating:36V







4.3 Dielectric strength:500V AC FOR 1 minute

4.4 Insulation Resistance:1000M Ω Min.

4.5 Contact Resistance:30m Ω Max

5. Operating Temperature:-55*c to +105*c

6. PACKING: Tray

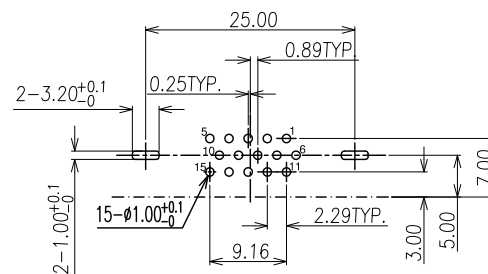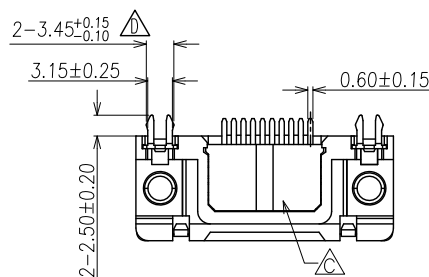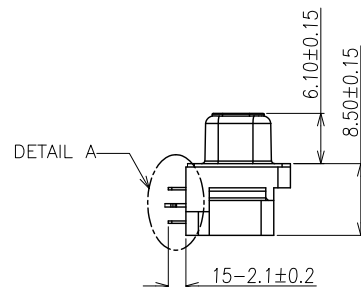

RECOMMENDED PCB LAYOUT

TOLERANCE: ± 0.05 mm

6	SCREW	2	FERROALLOY	Ni PLATED
5	Rivet insert	2	FERROALLOY	Tin PLATED
4	Contact	15	COPPER ALLOY	Au And Tin plated
3	Shell	1	FERROALLOY	Ni PLATED
2	Cover	1	PBT	UL94V-0,Blue
1	Housing	1	PBT	UL94V-0,Black
NO.	ITEM	Q'TY	DESCRIPTION	FINISH

GENERAL TOLERANCE
UNLESS OTHERWISE NOTED

Angle	$\pm 5^\circ$
X.	± 0.35
.X	± 0.25
.XX	± 0.15
.XXX	± 0.10
A4	



德力康电子科技有限公司

DLK DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD

C	名称 TITLE:	D-SUB R/A 12.5H CONN. 附螺丝			
档案名称 FILE NAME.	C-DSB4X-00-04	料号 PART NO:	84X15B01340		
DRAWING	王永辉	CHECKED	——	APPROVED	严成旺
UNIT:	mm	SCALE	1:1	SHEET: 1 of 1	