


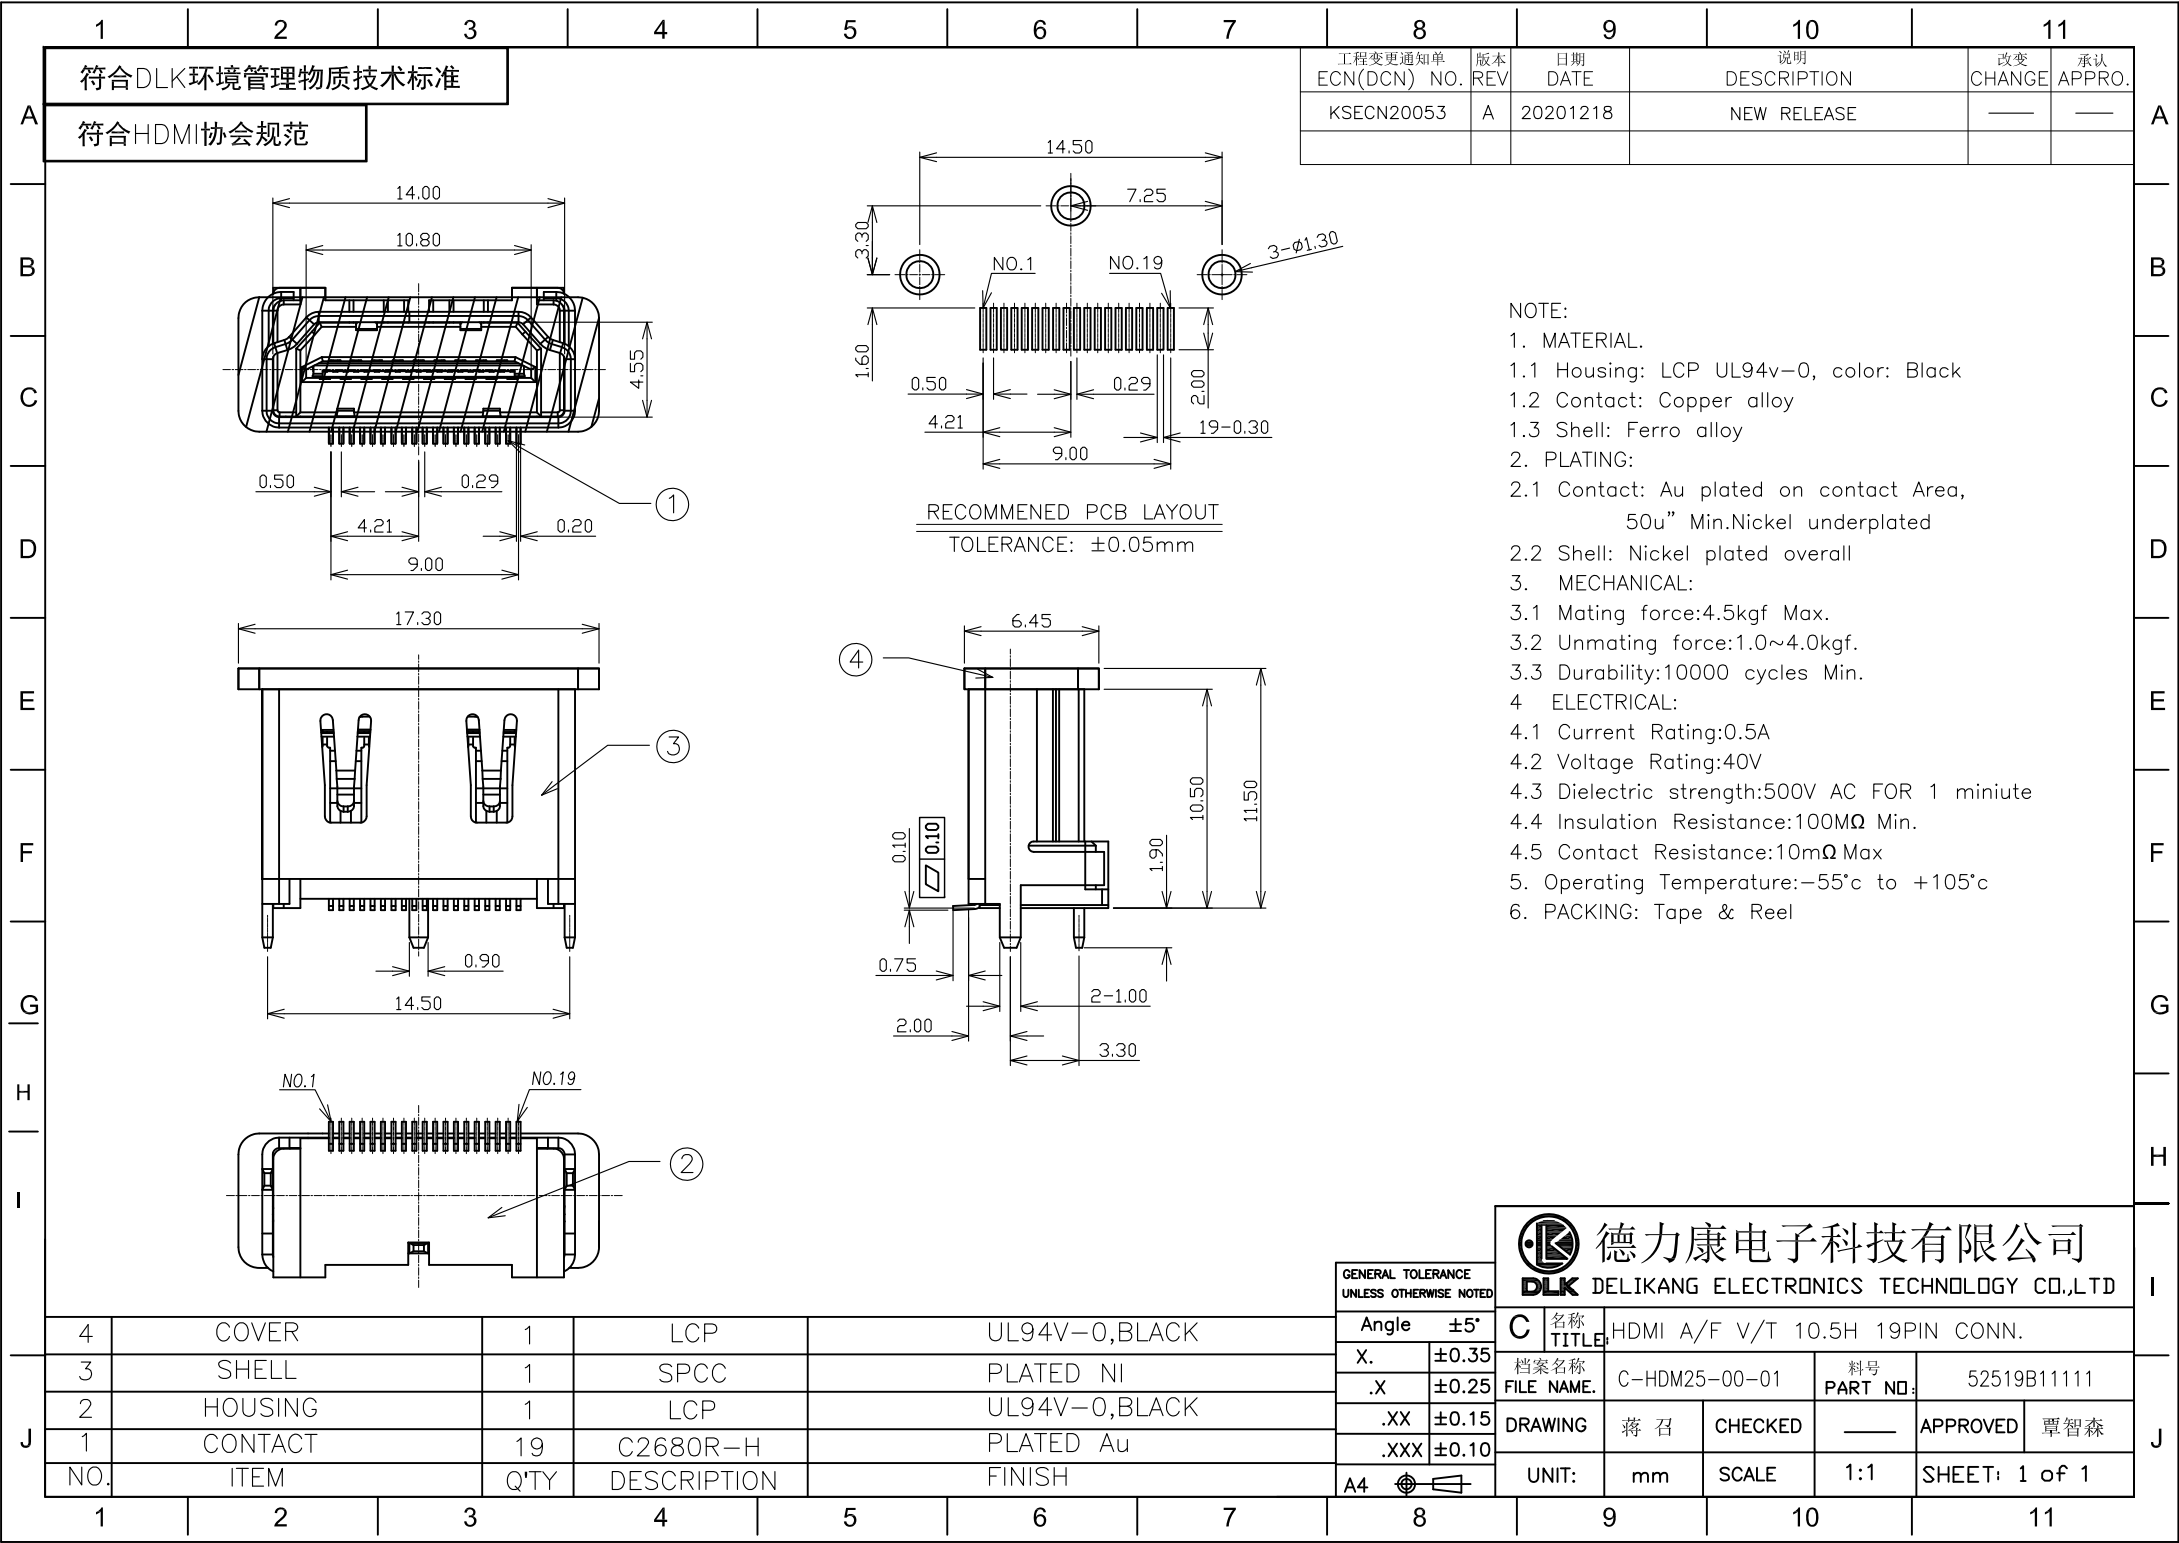

符合DLK环境管理物质技术标准

符合HDMI协会规范

工程变更通知单 ECN(DCN) NO.	版本 REV	日期 DATE	说明 DESCRIPTION	改变 CHANGE	承认 APPRO.
KSECN20053	A	20201218	NEW RELEASE	—	—

NOTE:

1. MATERIAL.

1.1 Housing: LCP UL94v-0, color: Black

1.2 Contact: Copper alloy

1.3 Shell: Ferro alloy

2. PLATING:

2.1 Contact: Au plated on contact Area, 50u" Min.Nickel underplated

2.2 Shell: Nickel plated overall

3. MECHANICAL:

3.1 Mating force:4.5kgf Max.

3.2 Unmating force:1.0~4.0kgf.

3.3 Durability:10000 cycles Min.

4 ELECTRICAL:

4.1 Current Rating:0.5A

4.2 Voltage Rating:40V

4.3 Dielectric strength:500V AC FOR 1 minute

4.4 Insulation Resistance:100MΩ Min.

4.5 Contact Resistance:10mΩ Max

5. Operating Temperature:-55°c to +105°c

6. PACKING: Tape & Reel



德力康电子科技有限公司
DLK DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD

C 名称
TITLE

档案名称
FILE NAME.

DRAWING

UNIT:

料号
PART NO.

CHECKED

SCALE

1:1

52519B11111

APPROVED

SHEET: 1 of 1

蒋召

覃智森

4	COVER	1	LCP	UL94V-0,BLACK
3	SHELL	1	SPCC	PLATED NI
2	HOUSING	1	LCP	UL94V-0,BLACK
1	CONTACT	19	C2680R-H	PLATED Au
NO.	ITEM	Q'TY	DESCRIPTION	FINISH

GENERAL TOLERANCE UNLESS OTHERWISE NOTED	
Angle	±5°
X.	±0.35
.X	±0.25
.XX	±0.15
.XXX	±0.10
A4	