

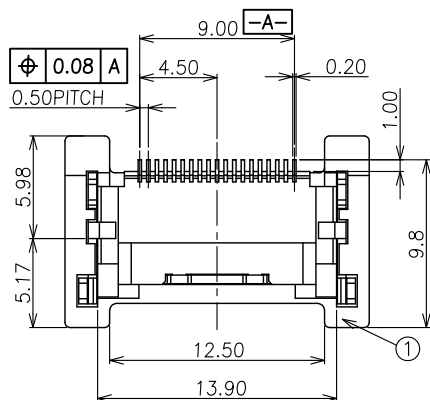

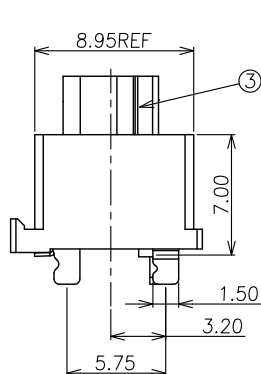
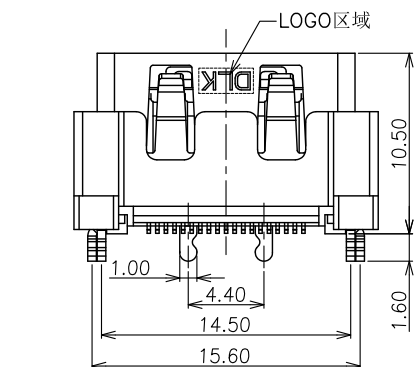
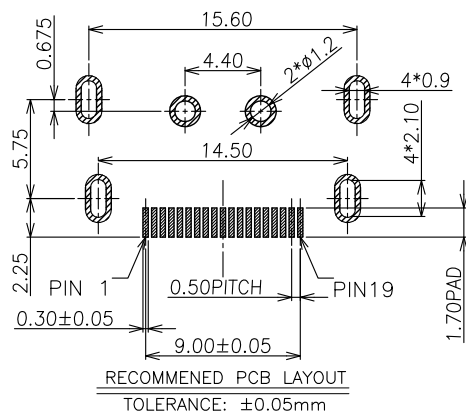


符合"DLK环境管理物质技术标准",符合HDMI协会规范要求

工程变更通知单 ECN(DCN) NO.	版本 REV	日期 DATE	说明 DESCRIPTION	改变 CHANGE	承认 APPRO.
KSECN16030	A	20160512	NEW RELEASE	—	—
KSECN20033	B	20200730	后塞依实物将17.50mm尺寸改为16.0mm $\triangle$ *1	王永辉	严成旺

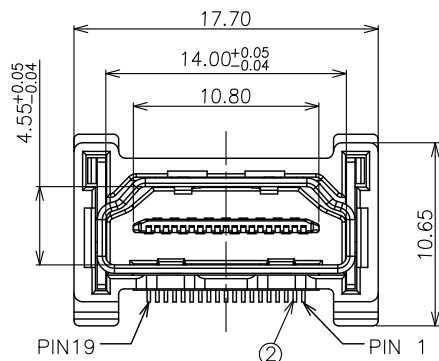

NOTE:

1. MATERIAL.

1.1 Housing: LCP UL94v-0, color: Black

1.2 Contact: Copper alloy

1.3 Shell: Ferro alloy

2. PLATING:

2.1 Contact: 2u" Au plated on contact Area,
50u" Min.Nickel underplated

2.2 Shell: Nickel plated overall

3. MECHANICAL:

3.1 Mating force:4.5kgf Max.

3.2 Unmating force:1.0~4.0kgf.

3.3 Durability:10000 cycles Min.

4. ELECTRICAL:

4.1 Current Rating:0.5A

4.2 Voltage Rating:40V

4.3 Dielectric strength:500V AC FOR 1 minute

4.4 Insulation Resistance:100M Ω Min.

4.5 Contact Resistance:10m Ω Max

5. Operating Temperature:-55°C to +105°C

6. PACKING: Tape & Reel



德力康电子科技有限公司

DLK DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD

GENERAL TOLERANCE
UNLESS OTHERWISE NOTED

Angle $\pm 5^\circ$

X. ± 0.35

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

A4 $\odot$ $\square$

C 名称 TITLE: HDMI A/F V/T 10.5H 19PIN CONN.

档案名称 FILE NAME: C-HDM2L-00-3G 料号 PART NO: HDM2LB-19BG2RN3G

DRAWING 王永辉 CHECKED $\square$ APPROVED 严成旺

UNIT: mm SCALE 1:1 SHEET: 1 of 1

4	STOPPLE	1	LCP	UL94V-0,BLACK
3	SHELL	1	FERRO ALLOY	PLATED Ni
2	CONTACT	19	COPPER ALLOY	PLATED Au
1	HOUSING	1	LCP	UL94V-0,BLACK
NO.	ITEM	Q'TY	DESCRIPTION	FINISH