

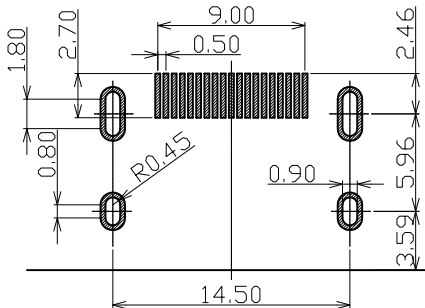

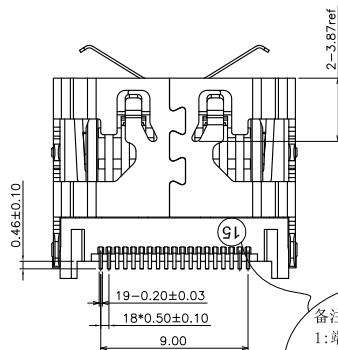



符合"DLK环境管理物质技术标准",符合HDMI协会规范要求



RECOMMENED PCB LAYOUT
TOLERANCE: ±0.05mm



备注:

- 1:端子电镀规格为:3u"时
此处加字码:3
2:端子电镀规格为:15u"时
此处加字码:15

COPLARNITY

NOTE:

1. MATERIAL.

1.1 Housing: LCP UL94v-0, color: Black

1.2 Contact: Copper alloy

1.3 Shell: Copper alloy

1.4 Shrapnel:Stainless steel

2. PLATING:

2.1 Contact: 1u"Au plated on contact Area,
50u" Min. Matte Tin plated on solder tail,
50u" Min.Nickel underplated

2.2 Shell: Nickel plated overall

3. MECHANICAL:

3.1 Mating force:4.5kgf Max.

3.2 Unmating force:1.0~4.0kgf.

3.3 Durability:10000 cycles Min.

4 ELECTRICAL:

4.1 Current Rating:0.5A

4.2 Voltage Rating:40V

4.3 Dielectric strength:500V AC FOR 1 minute

4.4 Insulation Resistance:100MΩ Min.

4.5 Contact Resistance:10mΩ Max

5. Operating Temperature:-55°C to +105°C

6. PACKING: Tape & Reel

4	SHRAPNEL	1	STAINLESS STEEL	——
3	CONTACT	19	COPPER ALLOY	PLATED Au
2	SHELL	1	COPPER ALLOY	PLATED NI
1	HOUSING	1	LCP	UL94V-0,Black
NO.	ITEM	Q'TY	DESCRIPTION	FINISH

GENERAL TOLERANCE
UNLESS OTHERWISE NOTED

Angle ±5°

X. ±0.35

.X ±0.25

.XX ±0.15

.XXX ±0.10

A4



德力康电子科技有限公司

DLK DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD

C 名称 TITLE: HDM11.4 卧式带弹片脚长2.20mm

档案名称 FILE NAME: C-HDM41-00-06

料号 PART NO: 54119B01161

DRAWING 陆桂棚 CHECKED

UNIT: mm SCALE 1:1 SHEET: 1 of 1

APPROVED 严成旺