

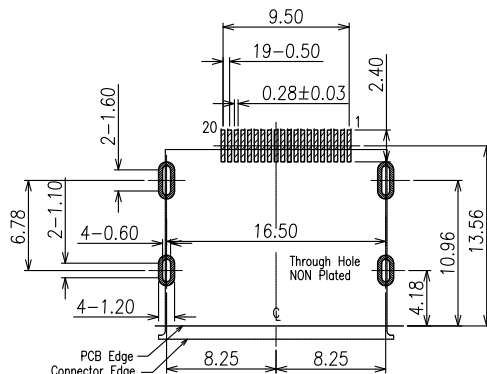
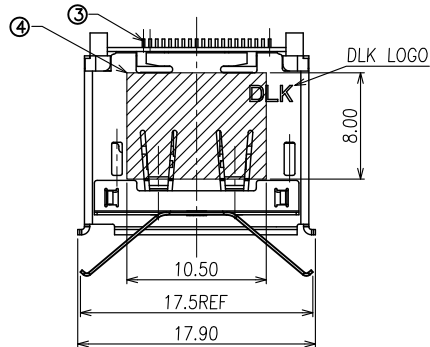
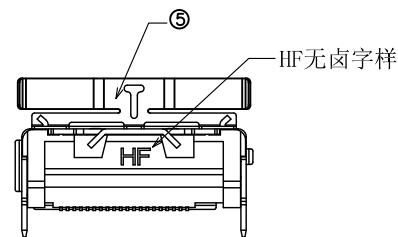


符合"DLK环境管理物质技术标准"

符合VESA协会规范标准"

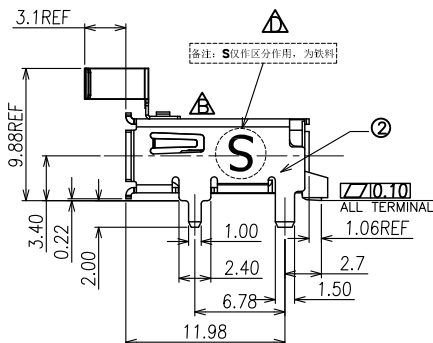

RECOMMENDED PCB LAYOUT
TOLERANCE: $\pm 0.05\text{mm}$

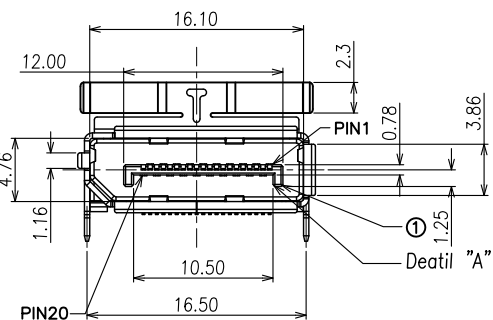

NOTE:

1. MATERIAL.

1.1 Housing: LCP UL94v-0, color: Black

1.2 Contact: Copper alloy

1.3 Shell: Stainless steel

1.4 Shrapnel: Stainless steel

2. PLATING:

2.1 Contact: 15u" Au plated on contact Area,
50u" Min. Matte Tin plated on solder tail,
50u" Min. Nickel underplated

2.2 Shell: Nickel plated overall

3. MECHANICAL:

3.1 Mating force: 4.5kgf Max.

3.2 Unmating force: 1.0~4.0kgf.

3.3 Durability: 10000 cycles Min.

4. ELECTRICAL:

4.1 Current Rating: 0.5A

4.2 Voltage Rating: 40V

4.3 Dielectric strength: 500V AC FOR 1 minute

4.4 Insulation Resistance: 100M Ω Min.

4.5 Contact Resistance: 30m Ω Max

5. Operating Temperature: -55°C to +85°C

6. PACKING: Tape & Reel

5	SHRAPNEL	1	STAINLESS STEEL	——
4	MYLAR	1	MYLAR	——
3	CONTACT	20	COPPER ALLOY	PLATED Au
2	SHELL	1	STAINLESS STEEL	PLATED NI
1	HOUSING	1	LCP	UL94V-0, Black
NO.	ITEM	Q'TY	DESCRIPTION	FINISH

GENERAL TOLERANCE
UNLESS OTHERWISE NOTED

Angle $\pm 5^\circ$

X. ± 0.35

.X ± 0.25

.XX ± 0.15

.XXX ± 0.10

A4



德力康电子科技有限公司



DELIKANG ELECTRONICS TECHNOLOGY CO.,LTD

C	名称 TITLE:	DisplayPort SMT Type 9.88H			
	档案名称 FILE NAME:	C-DPT28-00-00	料号 PART NO:	62820B04101	
DRAWING	王永辉	CHECKED	——	APPROVED	严成旺
UNIT:	mm	SCALE	1:1	SHEET: 1 of 1	