


CLIFF

DUALSLIM CAT5e RJ45 SHIELDED METAL FRAME FEEDTHROUGH CONNECTOR

Can be front or rear mounted in the panel

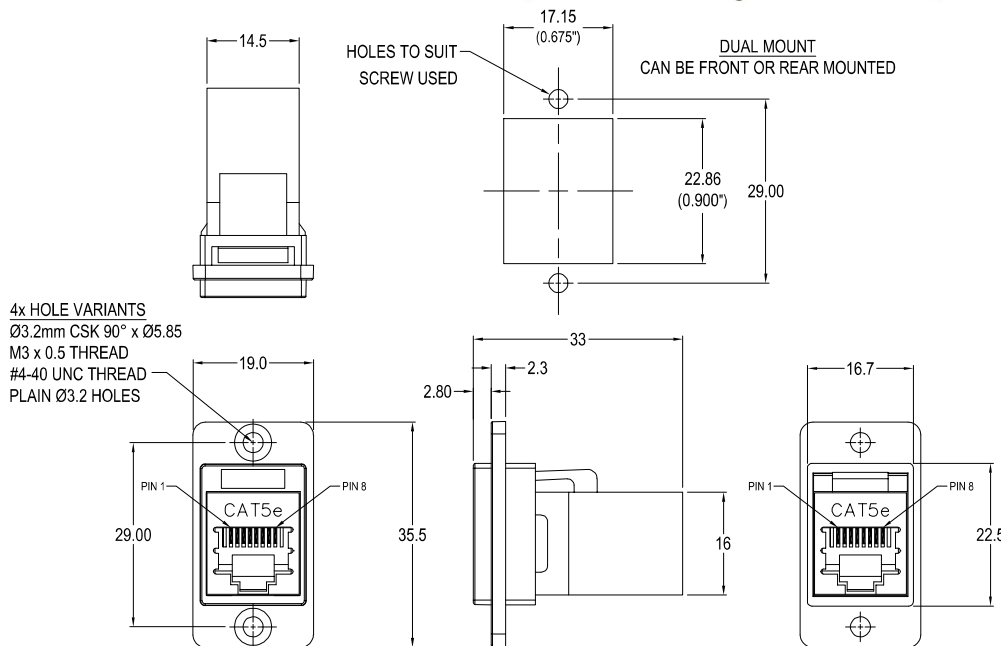

VARIANTS

Part No.

CP30720SM

DUALSLIM Cat5e RJ45 Shielded Nickel frame, CSK holes

CP30720SMB

DUALSLIM Cat5e RJ45 Shielded Black metal frame, CSK holes

CP30720SM3

DUALSLIM Cat5e RJ45 Shielded Nickel frame, M3 holes

CP30720SMB3

DUALSLIM Cat5e RJ45 Shielded Black metal frame, M3 holes

CP30720SM440

DUALSLIM Cat5e RJ45 Shielded Nickel frame, #4-40 holes

CP30720SMB440

DUALSLIM Cat5e RJ45 Shielded Black metal frame, #4-40 holes

CP30720SMX1

DUALSLIM Cat5e RJ45 Shielded Nickel frame, Ø3.2 PLAIN holes

CP30720SMBX1

DUALSLIM Cat5e RJ45 Shielded Black metal frame, Ø3.2 PLAIN holes

Feedthrough Features

- Fits standard rectangular cutout.
- Front or rear mounting through the panel.
- Various hole mounting options.
- No soldering or punch termination. Use standard cable for each connector style.
- Low rear profile.

General:

Please note: Functionality is affected by cable quality, length and cable wiring configuration.

Material:

1. RJ45 In-Line Coupler: ABS UL94-V0 Fully Shielded
2. RJ45 In-Line Coupler Contact:
Phosphor Bronze, 3-50 micro inches gold plating over nickel plate.
3. PCB: FR4
4. Frame: Diecast, Nickel or Black plated

Performance:

1. T568A & T568B wiring.
2. Meet ISO/IEC 11801 and EN50173
3. Meet ANSI/TIA/EIA 568B.2
4. Rating 125VAC RMS 1.5A
5. Operating Temperatures: Min -10°C Max +70°C