


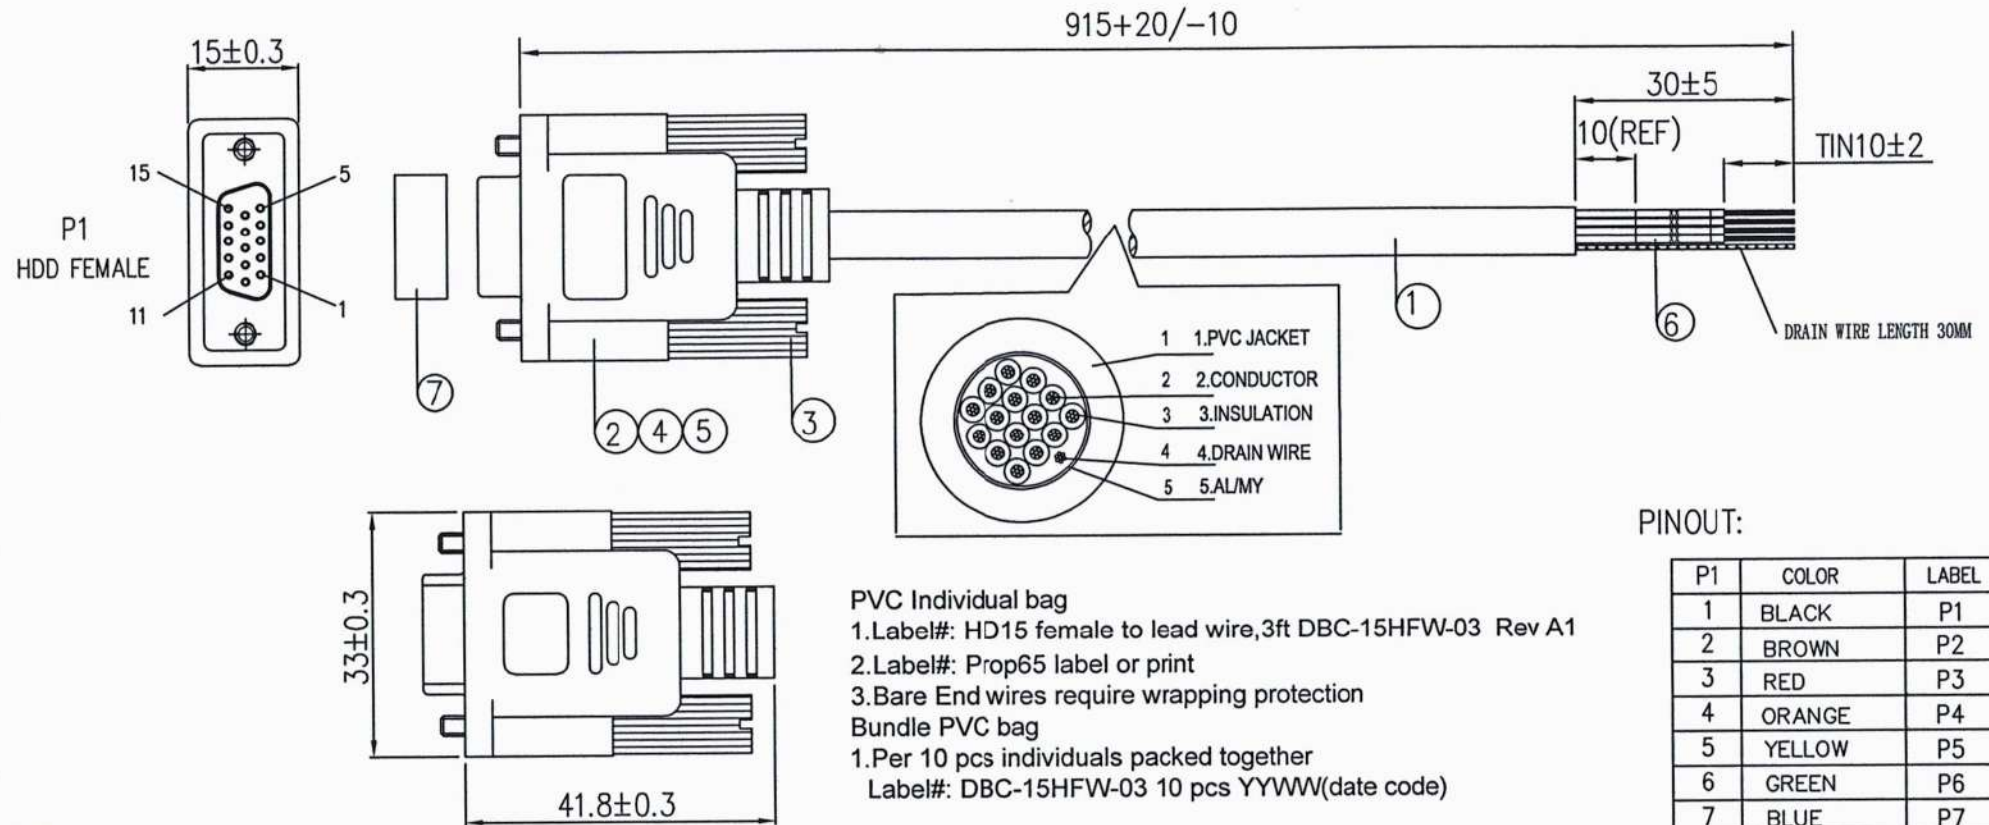

SPEC:

1. CABLE UL 2464 28AWG*15C+DRAIN+AL JACKET BLACK IN COLOR OD:5.5MM
2. CONNECTOR D-SUB HD 15PIN FEMALE BLACK COLOR SHELL NICKEL PLATED
3. MOLDING SCREW 4-40UNC 4*38.5MM
4. 100%METAL SHELL OF HDD 15PIN CONNECTORS
5. MOLDING PVC(UL94-V0) BLACK IN COLOR.
6. HEAT SHRINK TUBE LABEL WHITE IN COLOR L=15MM
7. DUST CAP

REV	DATE	DESCRIPTION	DRAWN BY	CHECKED BY	SALES	APPROVAL BY	P/N: DBC-15HFW-03	Codes	SHEET NO.
A/0			张俊峰	张俊峰	hian	Jim			
			SCALE:	UNIT:MM	DATE: 2024.06.11		Model Name: D-Sub High Density DB15 Female RS-232 Serial Cable to Lead Wires 3 FT	KV342	1/1

CompuCableUSA