


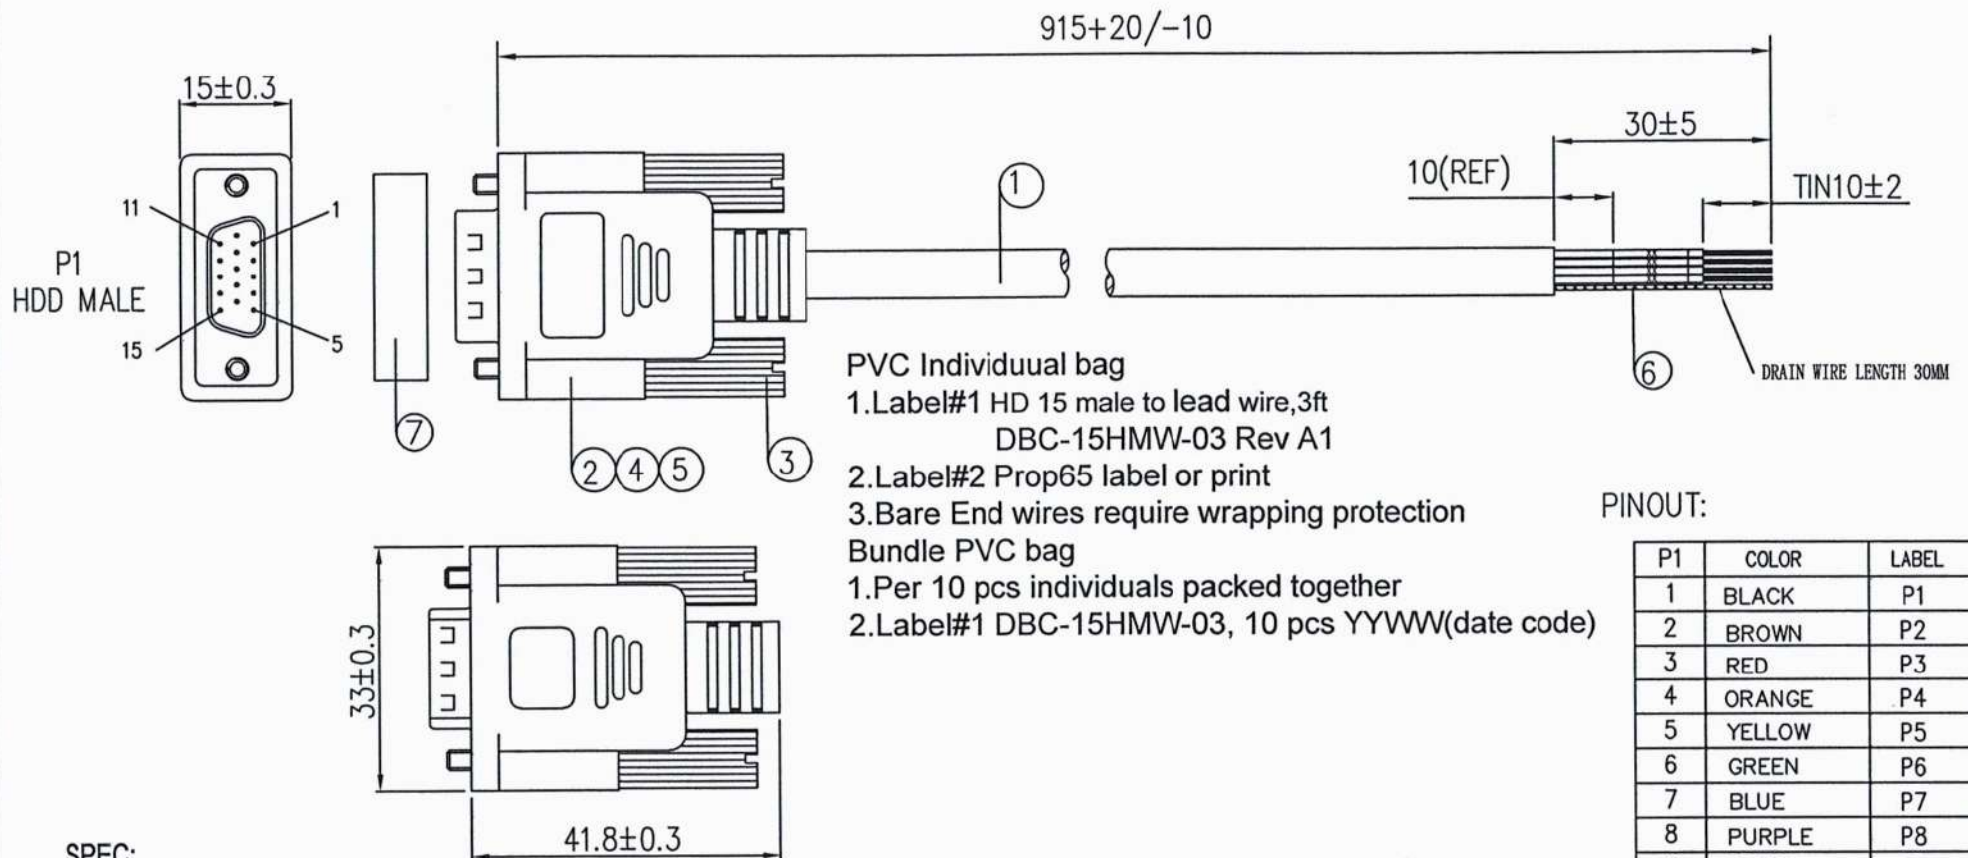

PVC Individual bag

- 1.Label#1 HD 15 male to lead wire,3ft
DBC-15HMW-03 Rev A1

- 2.Label#2 Prop65 label or print

- 3.Bare End wires require wrapping protection

Bundle PVC bag

- 1.Per 10 pcs individuals packed together

- 2.Label#1 DBC-15HMW-03, 10 pcs YYWW(date code)

PINOUT:

P1	COLOR	LABEL
1	BLACK	P1
2	BROWN	P2
3	RED	P3
4	ORANGE	P4
5	YELLOW	P5
6	GREEN	P6
7	BLUE	P7
8	PURPLE	P8
9	GRAY	P9
10	WHITE	P10
11	PINK	P11
12	LIGHT GREEN	P12
13	BLACK/WHITE	P13
14	BROWN/WHITE	P14
15	RRED/WHITE	P15
SHELL	DRAIN	

SPEC:

1. CABLE UL 2464 15CONDUCTOR 28AWG 100%AL DRAIN JACKET BLACK IN COLOR OD:5.5MM
2. CONNECTOR D-SUB HD 15PIN MALE BLACK COLOR SHELL NICKEL PLATED
3. MOLDING SCREW 4-40UNC 4*38.5MM
4. 100%METAL SHELL OF HDD 15PIN CONNECTORS
5. MOLDING PVC(UL94-V0) BLACK IN COLOR.
6. HEAT SHRINK TBUE LABEL WHITE IN COLOR L=15MM
7. DUST CAP

REV	DATE	DESCRIPTION	DRAWN BY	CHECKED BY	SALES	APPROVAL BY	P/N: DBC-15HMW-03	Codes	SHEET NO.
A/0			<i>[Signature]</i>	<i>[Signature]</i>	<i>[Signature]</i>	<i>[Signature]</i>	Model Name: D-Sub High Density DB15 Male RS-232 Serial Cable to Lead Wires 3 FT	KV343	1/1
			SCALE:	UNIT:MM	DATE: 2024.06.11				

CompuCableUSA