


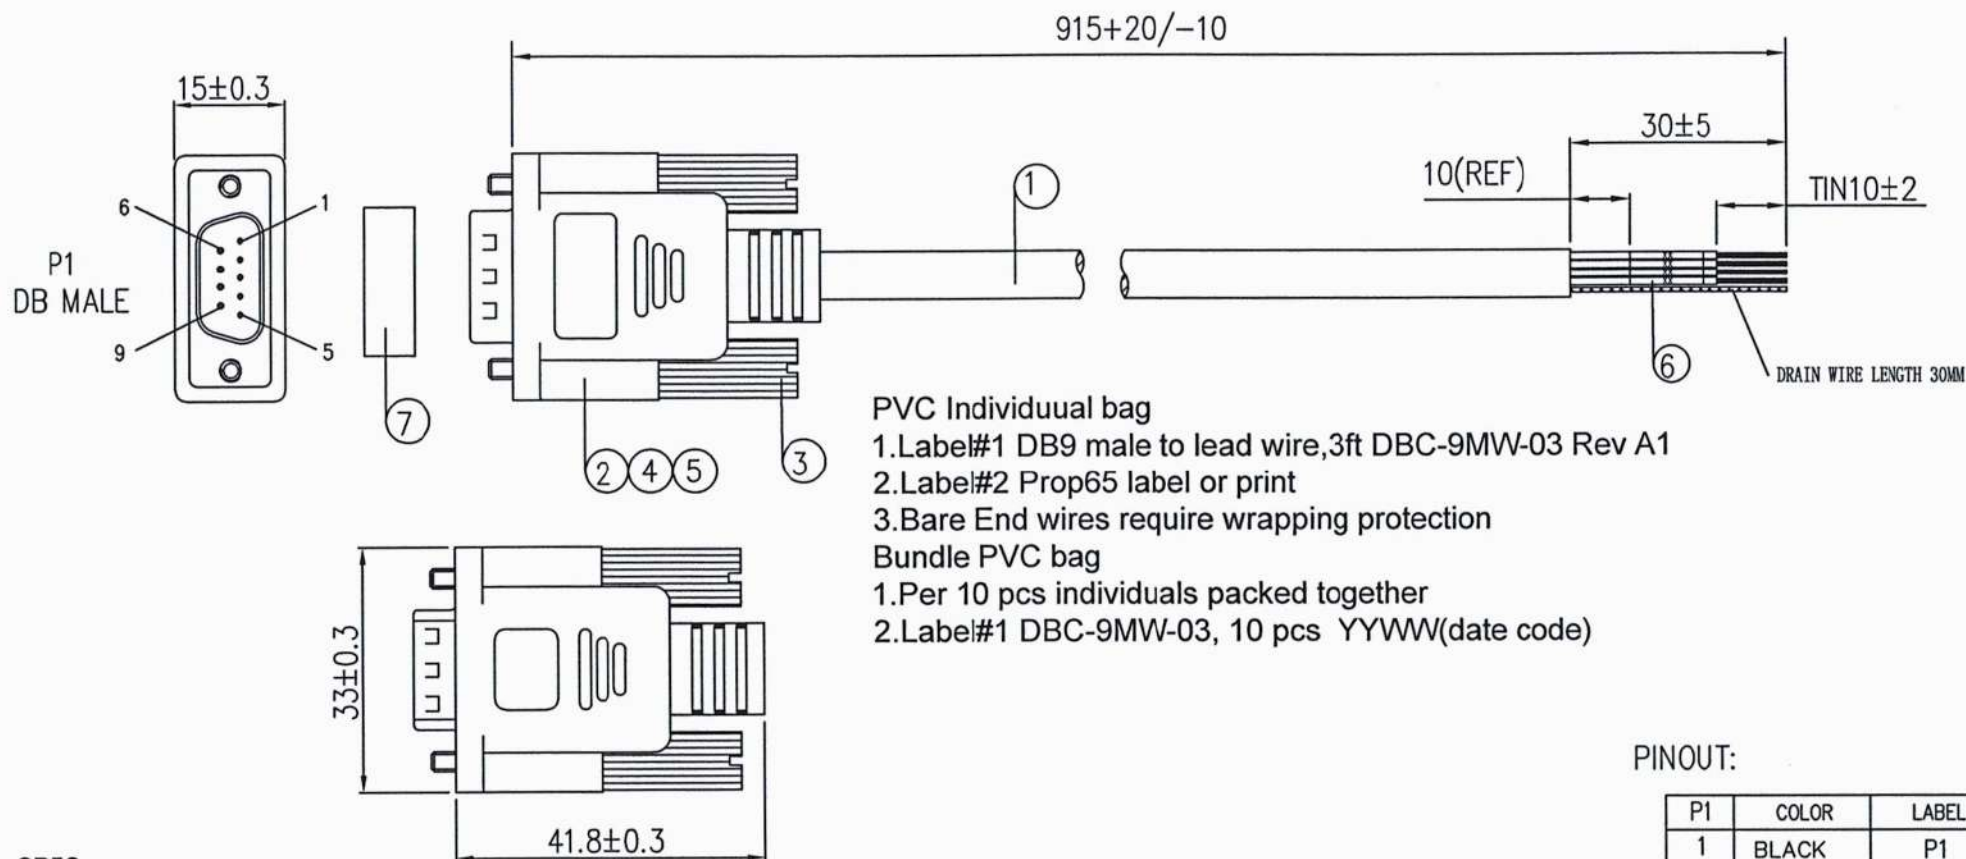

PINOUT:

P1	COLOR	LABEL
1	BLACK	P1
2	BROWN	P2
3	RED	P3
4	ORANGE	P4
5	YELLOW	P5
6	GREEN	P6
7	BLUE	P7
8	PURPLE	P8
9	GRAY	P9
SHELL	DRAIN	

SPEC:

1. CABLE UL 2464 9CONDUCTOR 28AWG 100%AL DRAIN JACKET BLACK IN COLOR OD:5.0MM
2. CONNECTOR DB9 PIN MALE BLACK COLOR SHELL NICKEL PLATED
3. MOLDING SCREW 4-40UNC 4*38.5MM
4. 100%METAL SHELL OF DB9PIN CONNECTORS
5. MOLDING PVC(UL94-V0) BLACK IN COLOR.
6. HEAT SHRINK TBUE LABEL WHITE IN COLOR L=15MM
7. DUST CAP

REV	DATE	PROJECTION	DRAWN BY	CHECKED BY	SALES	APPROVAL BY	P/N: DBC-9MW-03	Codes	SHEET NO.
A/0			milan	milan	milan	6/11/2023			
			SCALE:	UNIT:MM	DATE: 2023.03.29		Model Name: D-Sub DB9 Male RS-232 Serial Cable to Lead Wires 3 FT	KDB311	1/1

CompuCableUSA