
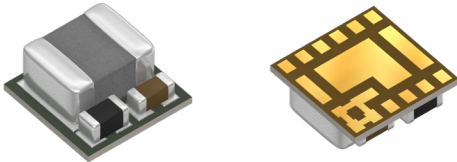
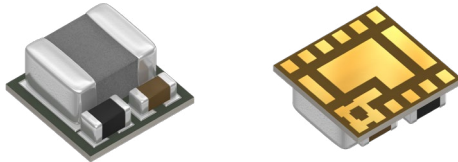
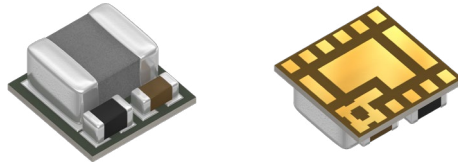
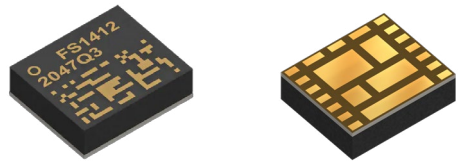


μPOL Chip-Embedded DC-DC Power Modules

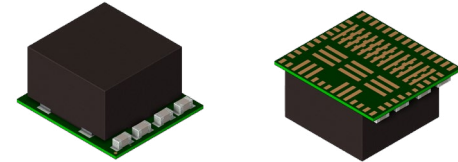

Coming Soon

Series		FS1703		FS1403 / FS1603		FS1404 / FS1604		FS1406 / FS1606		FS1212		FS1525			
Illustrations															
Package		LGA / 17PIN										LGA / 22PIN		LGA / 44PIN	
Dimensions		3.3mm x 3.3 mm x 1.5mm (1.35mm for FS160x)										4.9mm x 5.8mm x 1.6mm		6.9mm x 7.6mm x 3.8mm	
Output Current (I _{out})		3A		4A		6A		12A		25A, current sharable x 8 25A to 200A					
Input Voltage (V _{in})		5V	8V to 16V 4.5V, 6.75V to 16V	4.5V to 16V	6V to 16V 4.75V to 16V	4.5V to 16V									
Output Voltage (V _{out})	5.00		FS1403-5000- FS1603-5000-												
	3.30	FS1703-3300-	FS1403-3300- FS1603-3300-		FS1404-3300- FS1604-3300-										
	2.64					FS1406-2640-									
	2.50			FS1404-2500- FS1604-2500-		FS1406-2500- FS1606-2500-									
	1.80					FS1406-1800- FS1606-1800-	FS1406-0600- FS1606-0600	FS1412-0600-	FS1525-0600-						
	1.20					FS1406-1200- FS1606-1200-									
	1.10					FS1406-1100- FS1606-1100-									
	1.05					FS1406-1050- FS1606-1050-									
	1.00					FS1406-1000- FS1606-1000-									
	0.90					FS1406-0900-									
	0.80					FS1406-0800-									
	0.75					Fs1406-0750-									
	0.70					FS1406-0700-									
	0.60														
Evaluation Board		EV1703-3300-A	EV1403-5000-A EV1603-5000-A	EV1404-3300-A EV1604-3300-A		EV1406-1800-A / EV1406-0600-A EV1606-1800-A / EV1606-0600-A		EV1412-0600-A		EV1525-0600-A					
Operating Temperature		-40° to +125°C													
Mode of Control		ANALOG													
			I ² C												
											PMBus				