


CLIFF

GOLD SWITCHED JACK SOCKETS


6.35mm JACK SOCKET




CL11607

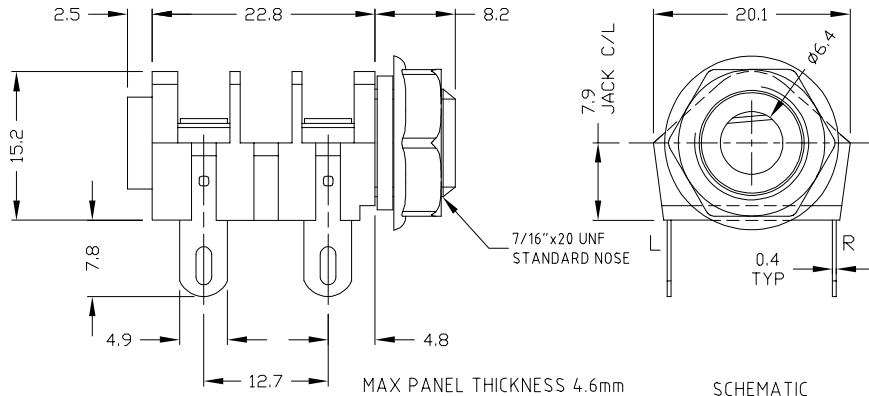


CL12207

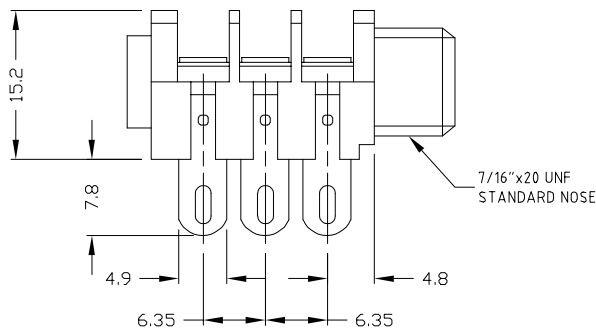


CL12327

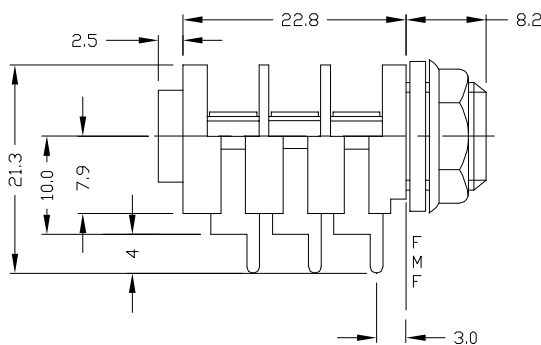


CL12345

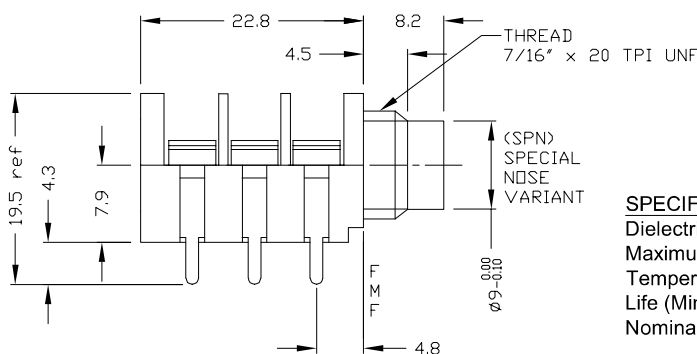


SCHEMATIC



MONO (BNB) JACK
SWITCH CONTACTS OPEN WHEN PLUG IS INSERTED + CLOSE WHEN PLUG IS WITHDRAWN.



STEREO (BBB) JACK
SWITCH CONTACTS OPEN WHEN PLUG IS INSERTED + CLOSE WHEN PLUG IS WITHDRAWN.

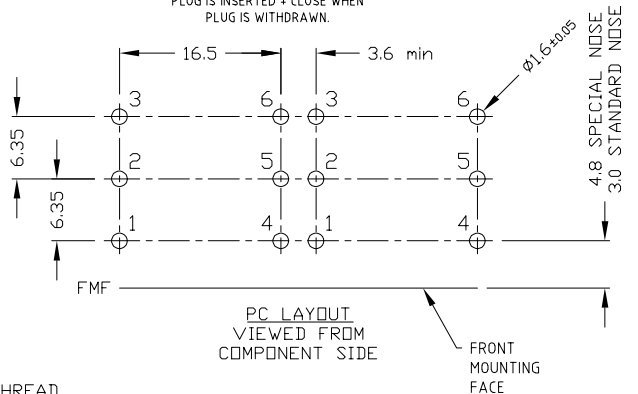

SPECIFICATION

Dielectric Withstand voltage:	2000V DC Min.
Maximum Current:	5A
Temperature Rating:	-10° C to +70° C
Life (Minimum):	10,000+ Operations
Nominal Contact Resistance:	<50mΩ

DESCRIPTION

CL11607 - Jack Socket Mono S2/BNB Solder Tag

CL12207 - Jack Socket Stereo S2/BBB Solder Tag


CL12327 - Jack Socket Stereo S2/BBB PC Tag Type A.

CL12345 - Jack Socket Stereo S2/BBB Special Nose PC Tag Type C. No nut or washers.




CLIFF

GOLD SWITCHED JACK SOCKETS

6.35mm JACK SOCKET

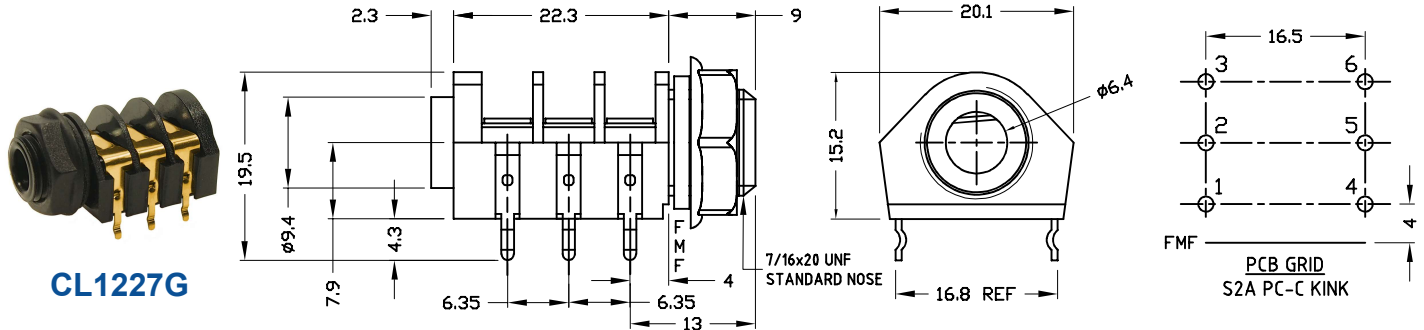

6.35mm JACK SOCKET

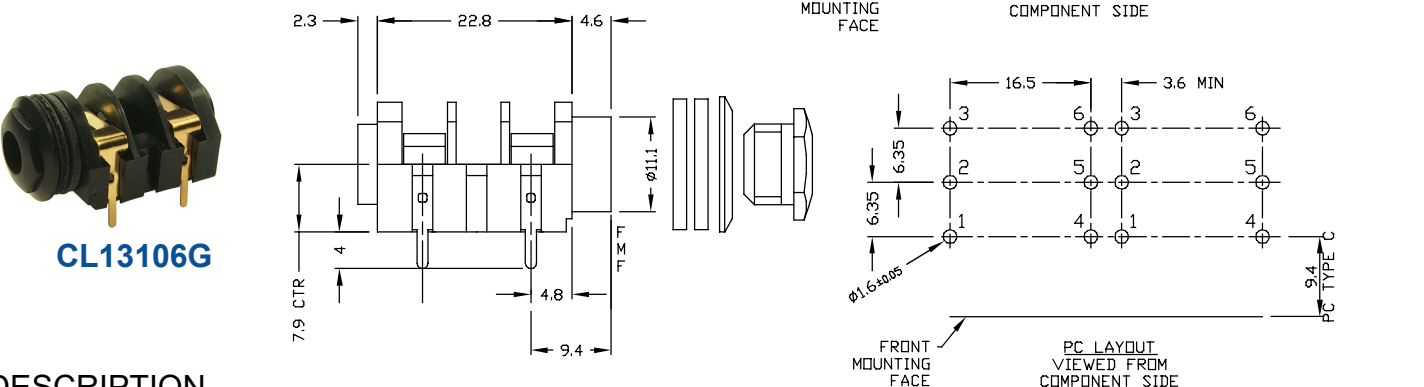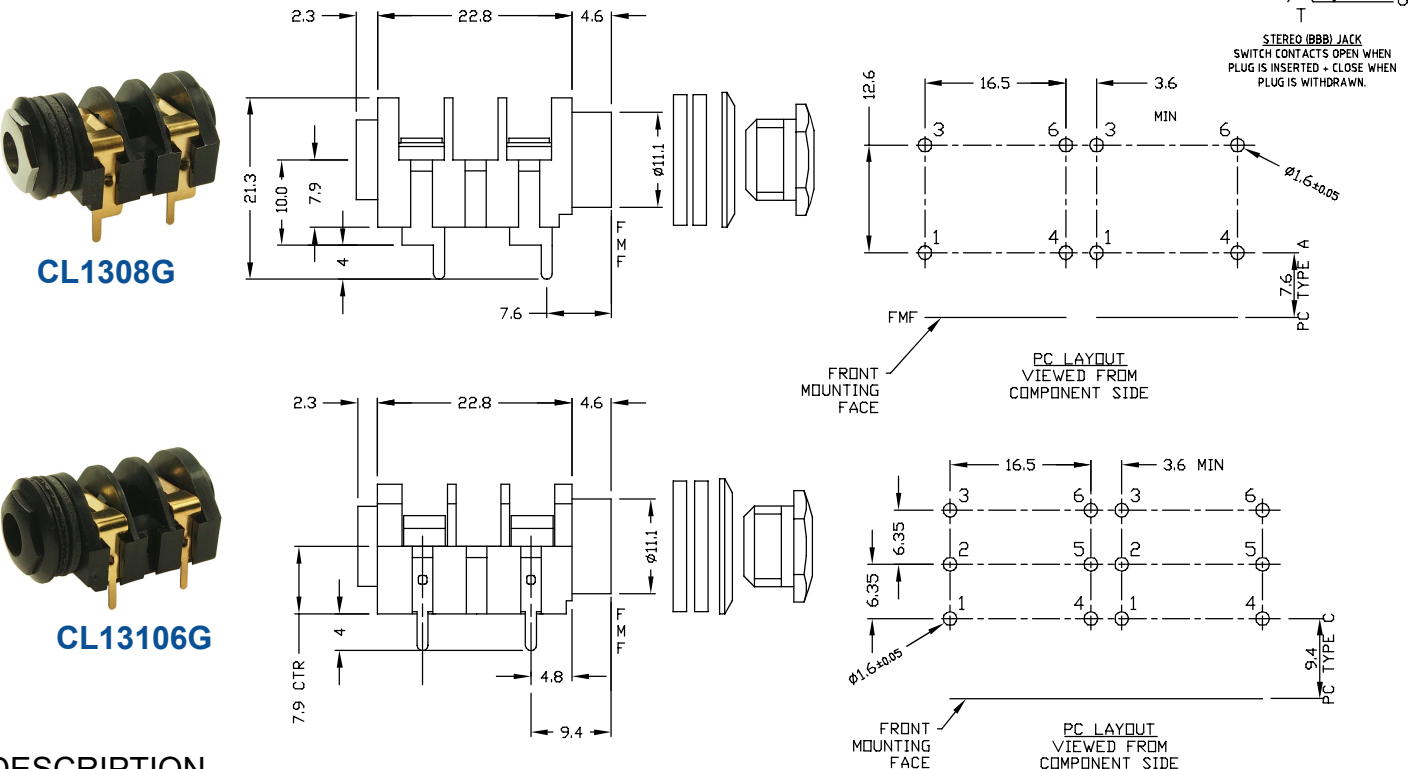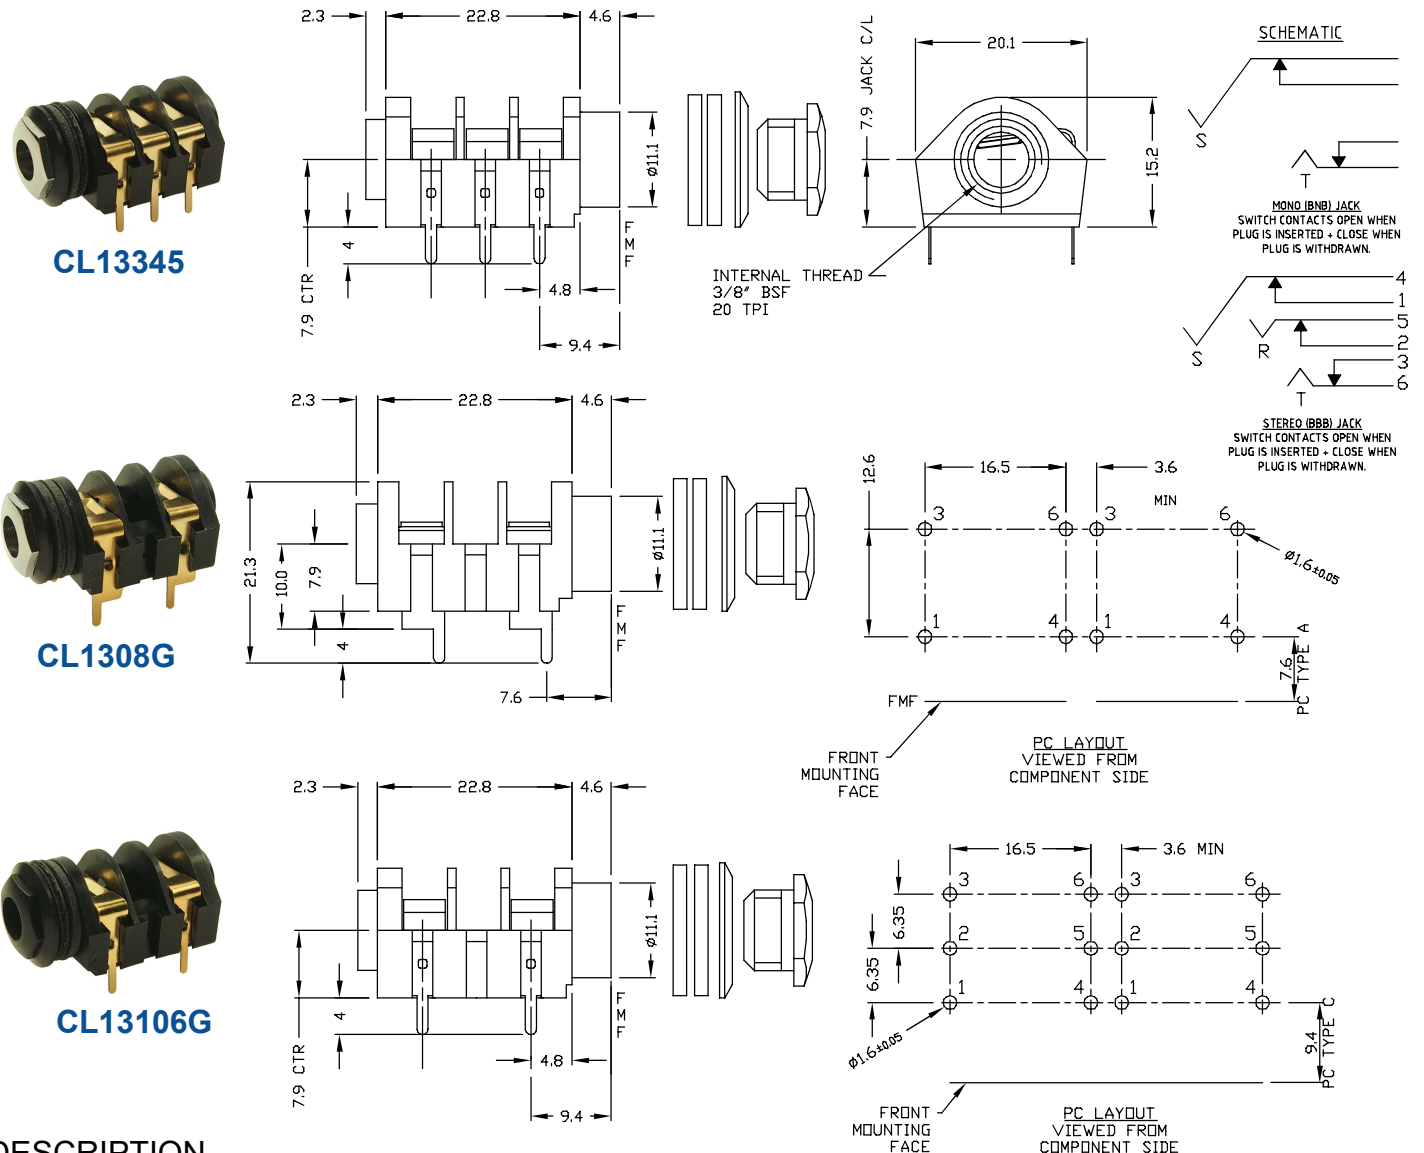

DESCRIPTION

- CL1227G** - Jack Socket Stereo S2A/BBB PC tag type C Kinked
- CL13345** - Jack Socket Stereo S4/BBB PC tag type C
- CL1308G** - Jack Socket Mono S4/BNB PC tag type A
- CL13106G** - Jack Socket Mono S4/BNB PC tag type C

CLIFF

GOLD SWITCHED JACK SOCKETS


6.35mm JACK SOCKET



CL1299A




CL1323A

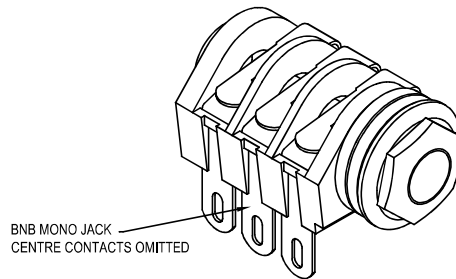


BNB MONO JACK
CENTRE CONTACTS OMITTED

SCHEMATIC



SWITCH CONTACTS OPEN WHEN
PLUG IS INSERTED, CLOSE WHEN
PLUG IS WITHDRAWN.

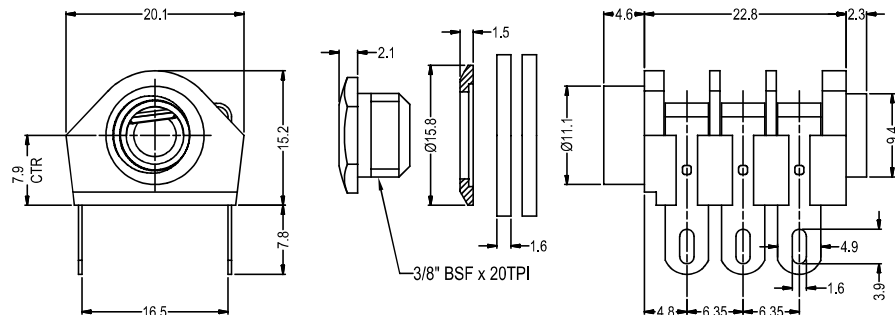

DESCRIPTION

CL1299A - Jack Socket Mono S4/BNB Solder Tag. Supplied assembled

CL1323A - Jack Socket Stereo S4/BBB Solder Tag. Supplied assembled

3.5mm JACK SOCKET




CL13845G




CL13843G

FCR1295G

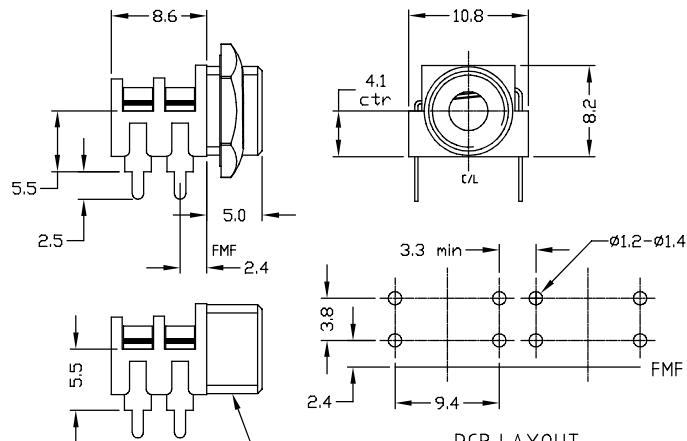


PCB LAYOUT



SPECIFICATIONS

- DIELECTRIC WITHSTAND VOLTAGE: 2000V DC min
- MAXIMUM CURRENT: 5A
- TEMPERATURE RANGE: -10°C TO +70°C
- LIFE (MINIMUM): 5,000+ OPERATIONS
- CONTACT RESISTANCE <50mΩ

SCHEMATIC



DESCRIPTION

CL13845G - 3.5mm Jack Socket S6G/BB with nut

CL13843G - 3.5mm Jack Socket S6G/BB without nut

CL1295G - 3.5mm Stereo Jack Socket S9/BBB with 6mm PCB legs

CLIFF

GOLD SWITCHED JACK SOCKETS

JACK SOCKET ACCESSORIES



FCR14422 - EMI / RFI SCREEN FOR 6.35mm JACK SOCKETS



CL14218 - BLACK COMBINED NUT/BEZEL FOR S4 TYPE JACK SOCKET



CL14218GY - GREY COMBINED NUT/BEZEL FOR S4 TYPE JACK SOCKET



CL14218R - RED COMBINED NUT/BEZEL FOR S4 TYPE JACK SOCKET



CL1396 - RECESS PLATE TO ALLOW FLUSH MOUNTING OF 6.35mm JACK SOCKETS

