



## DATASHEET

# 4G bits DDR4 SDRAM

### D2516AN9EXGXNI-U (256M words x 16 bits)

#### •Specifications

- Density: 4G bits
- Organization
  - 32M words x 16 bits x 8 banks
- Package
  - 96-ball FBGA
  - Lead-free
  - Halogen-free
- Power supply (JEDEC standard 1.2V)
  - VDD = 1.2V  $\pm$  0.06V
  - VPP = 2.5V +0.25V / -0.125V
- Data rate
  - 3200 Mbps max. Backward compatible
- 8 internal banks
  - 8 banks (4 banks x 2 bank groups) for x16 product
- Interface: Pseudo Open Drain (POD)
- Burst Length (BL): 8 and 4 with Burst Chop (BC)
- CAS Latency (CL):  
10,11,12,13,14,15,16,17,18,19,20,21,22,24
- CAS Write Latency (CWL): 9,10,11,12,14,16,18,20
- Precharge: auto precharge option for each burst access
- Refresh: auto-refresh, self-refresh
- Refresh cycles
  - Average refresh period
  - 7.8 $\mu$ s at -40°C  $\leq$  TC  $\leq$  +85°C
  - 3.9 $\mu$ s at +85°C < TC  $\leq$  +95°C
- Operating case temperature range
  - 40°C to +95°C (Industrial Temperature)

#### •Features

- Double-data-rate architecture: two data transfers per clock cycle.
- The high-speed data transfer is realized by the 8 bits prefetch pipelined architecture.
- Bi-directional differential data strobe (DQS and /DQS) is transmitted/received with data for capturing data at the receiver.
- DQS is edge-aligned with data for READs; center-aligned with data for WRITEs.
- Differential clock inputs (CK\_t and CK\_c).
- DLL aligns DQ and DQS transitions with CK transitions.
- Data mask (DM) write data-in at the both rising and falling edges of the data strobe.
- Write Cycle Redundancy Code (CRC) is supported.
- Programmable preamble for read and write is supported.
- Programmable burst length 4/8 with both nibble sequential and interleave mode.
- BL switch on the fly.
- Driver strength selected by MRS.
- Dynamic On Die Termination supported.
- Two Termination States such as RTT\_PARK and RTT\_NOM switchable by ODT pin.
- Asynchronous RESET pin supported.
- ZQ calibration supported.
- Write Levelization supported.
- This product in compliance with the RoHS directive.
- Internal Vref DQ level generation is available.
- TCAR(Temperature Controlled Auto Refresh) mode is supported.
- LP ASR(Low Power Auto Self Refresh) mode is supported.
- Command Address (CA) Parity (command/address) mode is supported.
- Per DRAM Addressability (PDA).
- Fine granularity refresh is supported.
- Geardown Mode(1/2 rate, 1/4 rate) is supported.
- Self Refresh Abort is supported.
- Maximum power saving mode is supported.
- Banks Grouping is applied, and CAS to CAS latency(tCCD\_L, tCCD\_S) for the banks in the same or different bank group accesses are available.
- DMI pin support for write data masking and DBIdc functionality.

Revision History


| Revision No. | History         | Release date | Editor   | Approved by         |
|--------------|-----------------|--------------|----------|---------------------|
| A00          | Initial release | Jul 2024     | Jona Lee | Jason Yen / CK Wang |

*\*Products and specifications discussed herein are for evaluation and reference purposes only and are subject to change by without notice.  
All information discussed herein is provided on an "as is" basis, without warranties of any kind.*

## Ordering Information

| Part Number      | Die revision | Organization<br>(words x bits) | Internal<br>Banks | JEDEC speed bin<br>(CL-tRCD-tRP) | Package      |
|------------------|--------------|--------------------------------|-------------------|----------------------------------|--------------|
| D2516AN9EXGXNI-U | E            | 256M x 16                      | 8                 | DDR4-3200 (22-22-22)             | 96-ball FBGA |

## Part Number

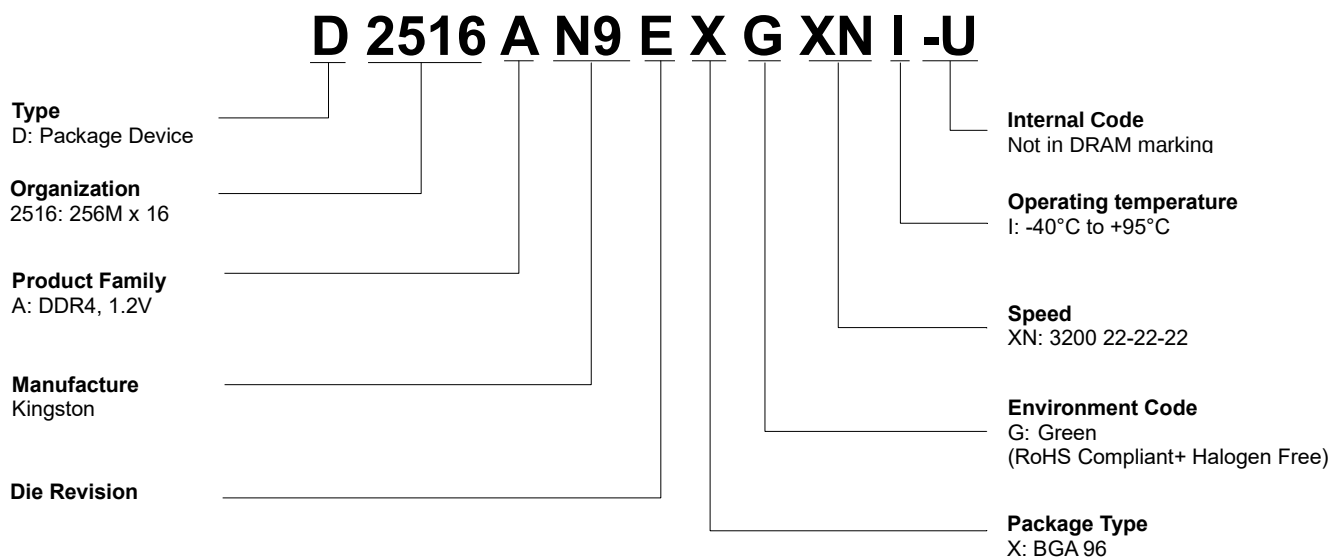

## Pin Configurations

### Pin Configurations ( x16 configuration)

96-ball FBGA

|   | 1       | 2                | 3      | 7                | 8             | 9       |
|---|---------|------------------|--------|------------------|---------------|---------|
| A | VDDQ    | VSSQ             | DQU0   | DQSU_c           | VSSQ          | VDDQ    |
| B | VPP     | VSS              | VDD    | DQSU_t           | DQU1          | VDD     |
| C | VDDQ    | DQU4             | DQU2   | DQU3             | DQU5          | VSSQ    |
| D | VDD     | VSSQ             | DQU6   | DQU7             | VSSQ          | VDDQ    |
| E | VSS     | DMU_n,<br>DBIU_n | VSSQ   | DML_n,<br>DBIL_n | VSSQ          | VSS     |
| F | VSSQ    | VDDQ             | DQSL_c | DQL1             | VDDQ          | ZQ      |
| G | VDDQ    | DQL0             | DQSL_t | VDD              | VSS           | VDDQ    |
| H | VSSQ    | DQL4             | DQL2   | DQL3             | DQL5          | VSSQ    |
| J | VDD     | VDDQ             | DQL6   | DQL7             | VDDQ          | VDD     |
| K | VSS     | CKE              | ODT    | CK_t             | CK_c          | VSS     |
| L | VDD     | WE_n/<br>A14     | ACT_n  | CS_n             | RAS_n/<br>A16 | VDD     |
| M | VREFCA  | BG0              | A10/AP | A12/<br>BC_n     | CAS_n/<br>A15 | VSS     |
| N | VSS     | BA0              | A4     | A3               | BA1           | TEN     |
| P | RESET_n | A6               | A0     | A1               | A5            | ALERT_n |
| R | VDD     | A8               | A2     | A9               | A7            | VPP     |
| T | VSS     | A11              | PAR    | NC               | A13           | VDD     |

| Pin name                                                                     | Function                                                             |
|------------------------------------------------------------------------------|----------------------------------------------------------------------|
| A0 to A14 <sup>*2</sup>                                                      | Address inputs<br>A10(AP) : Auto precharge<br>A12(BC_n) : Burst chop |
| BA0 to BA1 <sup>*2</sup>                                                     | Bank select                                                          |
| BG0                                                                          | Bank group input                                                     |
| DQU0 to DQU7<br>DQL0 to DQL7                                                 | Data input/output                                                    |
| DQS_t, /DQS_c                                                                | Differential data strobe                                             |
| CS_n <sup>*2</sup>                                                           | Chip select                                                          |
| RAS_n/A16 <sup>*2</sup><br>CAS_n/A15 <sup>*2</sup><br>WE_n/A14 <sup>*2</sup> | Command input                                                        |
| ACT_n <sup>*2</sup>                                                          | Activation command input                                             |
| CKE <sup>*2</sup>                                                            | Clock enable                                                         |
| CK_t, CK_c                                                                   | Differential clock input                                             |
| DMU_n,DML_n                                                                  | Write data mask                                                      |
| DBIU_n,DBIL_n                                                                | Data bus inversion                                                   |

| Pin name              | Function                            |
|-----------------------|-------------------------------------|
| ODT <sup>*2</sup>     | ODT control                         |
| RESET_n <sup>*2</sup> | Active low asynchronous reset       |
| PAR                   | Command and address parity          |
| ALERT_n               | Alert                               |
| TEN                   | Connectivity test mode enable       |
| VDD                   | Supply voltage for internal circuit |
| VSS                   | Ground for internal circuit         |
| VDDQ                  | Supply voltage for DQ circuit       |
| VSSQ                  | Ground for DQ circuit               |
| VREFCA                | Reference voltage for CA            |
| ZQ                    | Reference pin for ZQ calibration    |
| NC <sup>*1</sup>      | No connection                       |

Notes :

1. Not internally connected with die.
2. Input only pins (address, command, CKE, ODT and RESET\_n) do not supply termination.

## Input/Output Functional Description

**Table 1 : Input/Output function description**

| Symbol                                               | Type         | Function                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|------------------------------------------------------|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CK_t, CK_c                                           | Input        | Clock: CK_t and CK_c are differential clock inputs. All address and control input signals are sampled on the crossing of the positive edge of CK_t and negative edge of CK_c.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| CKE, (CKE1)                                          | Input        | Clock Enable: CKE HIGH activates, and CKE Low deactivates, internal clock signals and device input buffers and output drivers. Taking CKE Low provides Precharge Power-Down and Self-Refresh operation (all banks idle), or Active Power-Down (row Active in any bank). CKE is synchronous for Self-Refresh exit. After VREFCA and Internal DQ Vref have become stable during the power on and initialization sequence, they must be maintained during all operations (including Self-Refresh). CKE must be maintained high through out read and write accesses input buffers, excluding CK_t, CK_c and CKE are disabled during power-down. Input buffers, excluding CKE, are disabled during Self-Refresh. |
| CS_n, (CS1_n)                                        | Input        | Chip Select: All commands are masked when CS_n is registered HIGH. CS_n provides for external Rank selection on systems with multiple Ranks. CS_n is considered part of the command code.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| ODT, (ODT1)                                          | Input        | On Die Termination: ODT (registered HIGH) enables RTT_NOM termination resistance internal to the DDR4 SDRAM. When enabled, ODT is only applied to each DQ, DQS_t, DQS_c and DM_n/DBI_n/ TDQS_t, NU/TDQS_c (When TDQS is enabled via Mode Register A11=1 in MR1) signal for x8 configurations. For x16 configuration ODT is applied to each DQ, DQSU_t, DQSU_c, DQSL_t, DQSL_c, DMU_n, and DML_n signal. The ODT pin will be ignored if MR1 is programmed to disable RTT_NOM.                                                                                                                                                                                                                                |
| ACT_n                                                | Input        | Activation Command Input : ACT_n defines the Activation command being entered along with CS_n. The input into RAS_n, CAS_n/A15 and WE_n/A14 will be considered as Row Address A15 and A14                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| RAS_n/A16, CAS_n/A15, WE_n/A14                       | Input        | Command Inputs RAS_n/A16, CAS_n/A15 and WE_n/A14 (along with CS_n) define the command being entered. Those pins have multi function. For example, for activation with ACT_n Low, those are Addressing like A16,A15 and A14 but for non-activation command with ACT_n High, those are Command pins for Read, Write and other command defined in command truth table.                                                                                                                                                                                                                                                                                                                                         |
| DM_n/DBI_n/ TDQS_t, (DMU_n/DBI-U_n), (DML_n/ DBIL_n) | Input/Output | Input Data Mask and Data Bus Inversion: DM_n is an input mask signal for write data. Input data is masked when DM_n is sampled LOW coincident with that input data during a Write access. DM_n is sampled on both edges of DQS. DM is muxed with DBI function by Mode Register A10,A11,A12 setting in MR5. For x8 device, the function of DM or TDQS is enabled by Mode Register A11 setting in MR1. DBI_n is an input/output identifying whether to store/output the true or inverted data. If DBI_n is LOW, the data will be stored/output after inversion inside the DDR4 SDRAM and not inverted if DBI_n is HIGH. TDQS is only supported in X8                                                          |
| BG0 - BG1                                            | Input        | Bank Group Inputs : BG0 - BG1 define to which bank group an Active, Read, Write or Precharge command is being applied. BG0 also determines which mode register is to be accessed during a MRS cycle. x4/8 have BG0 and BG1 but x16 has only BG0                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| BA0 - BA1                                            | Input        | Bank Address Inputs: BA0 - BA1 define to which bank an Active, Read, Write or Precharge command is being applied. Bank address also determines which mode register is to be accessed during a MRS cycle.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| A0 - A17                                             | Input        | Address Inputs: Provided the row address for ACTIVATE Commands and the column address for Read/Write commands to select one location out of the memory array in the respective bank. (A10/AP, A12/BC_n, RAS_n/A16, CAS_n/A15 and WE_n/A14 have additional functions, see other rows. The address inputs also provide the op-code during Mode Register Set commands. A17 is only defined for the x4 configuration.                                                                                                                                                                                                                                                                                           |
| A10 / AP                                             | Input        | Auto-precharge: A10 is sampled during Read/Write commands to determine whether Autoprecharge should be performed to the accessed bank after the Read/Write operation. (HIGH: Autoprecharge; LOW: no Autoprecharge).A10 is sampled during a Precharge command to determine whether the Precharge applies to one bank (A10 LOW) or all banks (A10 HIGH). If only one bank is to be precharged, the bank is selected by bank addresses.                                                                                                                                                                                                                                                                        |
| A12 / BC_n                                           | Input        | Burst Chop: A12 / BC_n is sampled during Read and Write commands to determine if burst chop (on-the-fly) will be performed. (HIGH, no burst chop; LOW: burst chopped). See command truth table for details.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| RESET_n                                              | Input        | Active Low Asynchronous Reset: Reset is active when RESET_n is LOW, and inactive when RESET_n is HIGH. RESET_n must be HIGH during normal operation. RESET_n is a CMOS rail to rail signal with DC high and low at 80% and 20% of V <sub>DD</sub> .                                                                                                                                                                                                                                                                                                                                                                                                                                                         |

| Symbol                                             | Type           | Function                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|----------------------------------------------------|----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DQ                                                 | Input / Output | Data Input/ Output: Bi-directional data bus. If CRC is enabled via Mode register then CRC code is added at the end of Data Burst. Any DQ from DQ0~DQ3 may indicate the internal Vref level during test via Mode Register Setting MR4 A4=High. During this mode, RTT value should be set to Hi-Z. Refer to vendor specific datasheets to determine which DQ is used.                                                                                                                                                                                                              |
| DQS_t, DQS_c,<br>DQSU_t, DQSU_c,<br>DQSL_t, DQSL_c | Input / Output | Data Strobe: output with read data, input with write data. Edge-aligned with read data, centered in write data. For the x16, DQSL corresponds to the data on DQL0-DQL7; DQSU corresponds to the data on DQU0-DQU7. The data strobe DQS_t, DQSL_t and DQSU_t are paired with differential signals DQS_c, DQSL_c and DQSU_c, respectively, to provide differential pair signaling to the system during reads and writes. DDR4 SDRAM supports differential data strobe only and does not support single-ended.                                                                      |
| TDQS_t, TDQS_c                                     | Output         | Termination Data Strobe: TDQS_t/TDQS_c is applicable for x8 DRAMs only. When enabled via Mode Register A11 = 1 in MR1, the DRAM will enable the same termination resistance function onTDQS_t/ TDQS_c that is applied to DQS_t/DQS_c. When disabled via mode register A11 = 0 in MR1, DM/DBI/ TDQS will provide the data mask function or Data Bus Inversion depending on MR5; A11,12,10and TDQS_c is not used. x4/x16 DRAMs must disable the TDQS function via mode register A11 = 0 in MR1.                                                                                    |
| PAR                                                | Input          | Command and Address Parity Input : DDR4 Supports Even Parity check in DRAMs with MR setting. Once it's enabled via Register in MR5, then DRAM calculates Parity withACT_n,RAS_n,CAS_n/A15,WE_n/ A14,BG0-BG1,BA0-BA1,A15-A0. Input parity should maintain at the rising edge of the clock and at the same time with command & address with CS_n LOW                                                                                                                                                                                                                               |
| ALERT_n                                            | Input/Output   | Alert : It has multi functions such as CRC error flag , Command and Address Parity error flag as Output signal. If there is error in CRC, then Alert_n goes LOW for the period time interval and goes back HIGH. If there is error in Command Address Parity Check, then Alert_n goes LOW for relatively long period until on going DRAM internal recovery transaction to complete. During Connectivity Test mode, this pin works as input.<br>Using this signal or not is dependent on system. In case of not connected as Signal, ALERT_n Pin must be bounded to VDD on board. |
| TEN                                                | Input          | Connectivity Test Mode Enable : Required on x16 devices and optional input on x4/x8 with densities equal to or greater than 8Gb. HIGH in this pin will enable Connectivity Test Mode operation along with other pins. It is a CMOS rail to rail signal with AC high and low at 80% and 20% of VDD. Using this signal or not is dependent on System. This pin may be DRAM internally pulled low through a weak pull-down resistor to VSS.                                                                                                                                         |
| NC                                                 |                | No Connect: No internal electrical connection is present.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| VDDQ                                               | Supply         | DQ Power Supply: 1.2 V +/- 0.06 V                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| VSSQ                                               | Supply         | DQ Ground                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| VDD                                                | Supply         | Power Supply: 1.2 V +/- 0.06 V                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| VSS                                                | Supply         | Ground                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| VPP                                                | Supply         | DRAM Activating Power Supply: 2.5V ( 2.375V min , 2.75V max)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| VREFCA                                             | Supply         | Reference voltage for CA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| ZQ                                                 | Supply         | Reference Pin for ZQ calibration                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

**Table 2 : 4Gb Addressing Table**

| Configuration  |                      | 256 Mb x16 |
|----------------|----------------------|------------|
| Bank Address   | # of Bank Groups     | 2          |
|                | BG Address           | BG0        |
|                | Bank Address in a BG | BA0~BA1    |
| Row Address    |                      | A0~A14     |
| Column Address |                      | A0~A9      |
| Page size      |                      | 2KB        |

---

## CONTENTS

|                                                     |    |
|-----------------------------------------------------|----|
| Specifications .....                                | 1  |
| Features .....                                      | 1  |
| Revision History .....                              | 2  |
| Ordering Information .....                          | 3  |
| Part Number .....                                   | 3  |
| Pin Configurations .....                            | 4  |
| Input/Output Functional Description .....           | 5  |
| 1. Electrical Conditions .....                      | 9  |
| 1.1. Absolute Maximum Ratings .....                 | 9  |
| 1.2. Operating Temperature Condition .....          | 9  |
| 1.3. Recommended DC Operating Conditions .....      | 10 |
| 1.4. IDD, IPP and IDDQ Measurement Conditions ..... | 10 |
| 2. Electrical Specifications .....                  | 26 |
| 2.1 IDD Specifications .....                        | 26 |
| 2.2 Pin Capacitance .....                           | 28 |
| 2.3 Standard Speed Bins .....                       | 30 |
| 2.4 tREFI .....                                     | 32 |
| 3. Package Drawing .....                            | 33 |
| 3.1 96-ball FBGA .....                              | 33 |

## 1. Electrical Conditions

- All voltages are referenced to VSS (GND)
- Execute power-up and Initialization sequence before proper device operation is achieved.

### 1.1. Absolute Maximum Ratings

**Table 3: Absolute Maximum Ratings**

| Parameter                       | Symbol | Rating        | Unit | Notes   |
|---------------------------------|--------|---------------|------|---------|
| Power supply voltage            | VDD    | –0.3 to +1.50 | V    | 1, 3    |
| Power supply voltage for output | VDDQ   | –0.3 to +1.50 | V    | 1, 3    |
| DRAM activation power supply    | VPP    | –0.3 to +3.0  | V    | 4       |
| Input voltage                   | VIN    | –0.3 to +1.50 | V    | 1, 3, 5 |
| Output voltage                  | VOOUT  | –0.3 to +1.50 | V    | 1, 3, 5 |
| Storage temperature             | Tstg   | –55 to +100   | °C   | 1,2     |

Notes:

1. Stresses greater than those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.
2. Storage temperature is the case surface temperature on the center/top side of the DRAM.
3. VDD and VDDQ must be within 300mV of each other at all times; and VREFCA must be no greater than  $0.6 \times VDDQ$ . When VDD and VDDQ are less than 500mV; VREFCA may be equal to or less than 300mV.
4. VPP must be equal or greater than VDD/VDDQ at all times.
5. Overshoot area above 1.5V is specified in DDR4 Device Operation.

**Caution: Exposing the device to stress above those listed in Absolute Maximum Ratings could cause permanent damage. The device is not meant to be operated under conditions outside the limits described in the operational section of this specification. Exposure to Absolute Maximum Rating conditions for extended periods may affect device reliability.**

### 1.2. Operating Temperature Condition

**Table 4: Operating Temperature Condition**

| Parameter              | Symbol | Rating     | Unit | Notes |
|------------------------|--------|------------|------|-------|
| Industrial temperature | TC     | –40 to +95 | °C   | 1,2,3 |

Notes:

1. Operating case temperature is the case surface temperature on the center/top side of the DRAM.
2. The Normal Temperature Range specifies the temperatures where all DRAM specifications will be supported. During operation, the DRAM case temperature must be maintained between –40°C to +85°C for industrial temperature under all operating conditions.
3. Refer to tREFI and tRFC parameters table for tREFI requirements when operating above 85°C.
4. If SELF REFRESH operation is required in the extended temperature range, it is mandatory to use either the manual self refresh mode with extended temperature range capability (MR2[6] = 0 and MR2 [7] = 1) or enable the optional auto self refresh mode (MR2 [6] = 1 and MR2 [7] = 1).

### 1.3. Recommended DC Operating Conditions

**Table 5: Recommended DC Operating Conditions (TC = -40°C to +95°C)**

| Parameter             | Symbol | min   | typ | max  | Unit | Notes   |
|-----------------------|--------|-------|-----|------|------|---------|
| Supply voltage        | VDD    | 1.14  | 1.2 | 1.26 | V    | 1, 2, 3 |
| Supply voltage for DQ | VDDQ   | 1.14  | 1.2 | 1.26 | V    | 1, 2, 3 |
| Dram activating power | VPP    | 2.375 | 2.5 | 2.75 | V    | 3       |

Notes:

1. Under all conditions VDDQ must be less than or equal to VDD.
2. VDDQ tracks with VDD. AC parameters are measured with VDD and VDDQ tied together.
3. DC bandwidth is limited to 20MHz..

### 1.4. IDD, IPP and IDDQ Measurement Conditions

In this chapter, IDD, IPP and IDDQ measurement conditions such as test load and patterns are defined. The figure Measurement Setup and Test Load for IDD, IPP and IDDQ Measurements shows the setup and test load for IDD, IPP and IDDQ measurements.

- IDD currents (such as IDD0, IDD0A, IDD1, IDD1A, IDD2N, IDD2NA, IDD2NL, IDD2NT, IDD2P, IDD2Q, IDD3N, IDD3NA, IDD3P, IDD4R, IDD4RA, IDD4W, IDD4WA, IDD5B, IDD5F2, IDD5F4, IDD6N, IDD6E, IDD6R, IDD6A, IDD7 and IDD8) are measured as time-averaged currents with all VDD balls of the DDR4 SDRAM under test tied together. Any IPP or IDDQ current is not included in IDD currents.
- IPP currents have the same definition as IDD except that the current on the VPP supply is measured.
- IDDQ currents (such as IDDQ2NT and IDDQ4R) are measured as time-averaged currents with all VDDQ balls of the DDR4 SDRAM under test tied together. Any IDD current is not included in IDDQ currents.


Note: IDDQ values cannot be directly used to calculate I/O power of the DDR4 SDRAM. They can be used to support correlation of simulated I/O power to actual I/O power as outlined in correlation from simulated channel I/O power to actual channel I/O power supported by IDDQ measurement.

For IDD, IPP and IDDQ measurements, the following definitions apply:

- L and 0:  $V_{IN} \leq V_{IL(AC)} \text{ max}$
- H and 1:  $V_{IN} \geq V_{IH(AC)} \text{ min}$
- MID-LEVEL: defined as inputs are  $V_{REFCA} = VDD / 2$
- Timings used for IDD, IPP and IDDQ measurement-loop patterns are provided in Table 8.
- Basic IDD, IPP and IDDQ measurement conditions are described in Table 9.

Note: The IDD, IPP and IDDQ measurement-loop patterns need to be executed at least one time before actual IDD or IDDQ measurement is started.


- Detailed IDD, IPP and IDDQ measurement-loop patterns are described in IDD0 Measurement-Loop Pattern table through IDD7 Measurement-Loop Pattern table.
- IDD Measurements are done after properly initializing the DDR4 SDRAM. This includes but is not limited to setting:
  - RON = RZQ/7 (34Ω in MR1);
  - Qoff = 0B (Output buffer enabled in MR1);
  - RTT\_Nom = RZQ/6 (40Ω in MR1);
  - RTT\_WR = RZQ/2 (120Ω in MR2);
  - RTT\_PARK = Disable;
  - TDQS\_t feature disabled in MR1;
  - CRC disabled in MR2;
  - CA parity feature disabled in MR5;
  - Gear-down mode disabled in MR3;
  - Read/Write DBI disabled in MR5;
  - DM\_n disabled in MR5
- Define D = {CS\_n, ACT\_n, RAS\_n, CAS\_n, WE\_n} : = {H, L, L, L, L} ; apply BG/BA changes when directed.
- Define /D = {CS\_n, ACT\_n, RAS\_n, CAS\_n, WE\_n} : = {H, H, H, H, H}; apply BG/BA changes when directed

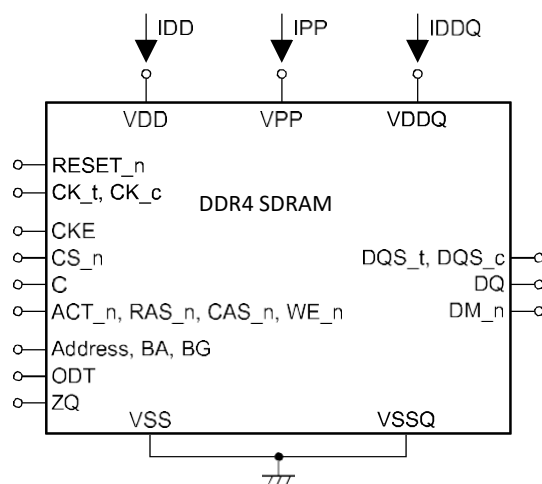

Note: DIMM level Output test load condition may be different from above.

Note: C pins are for stacked components such as 3DS. For mono package, these pins are NC.

**Figure 1: Measurement Setup and Test Load for  $I_{DD}$ ,  $I_{PP}$  and  $I_{DDQ}$  Measurements**

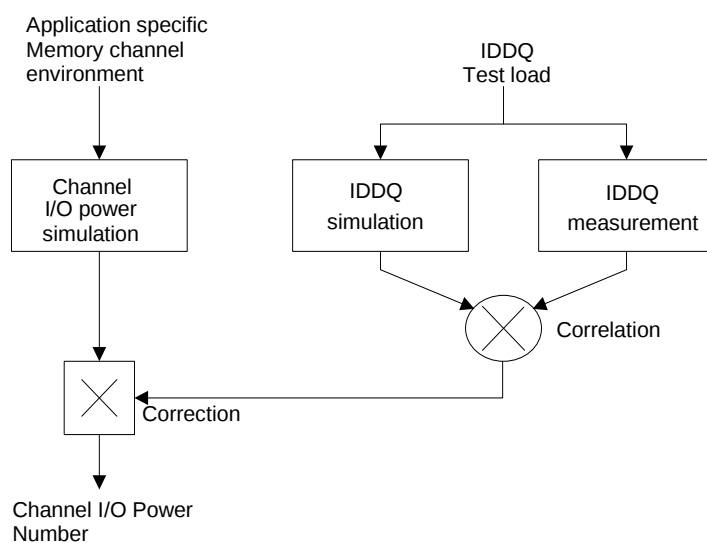

**Figure 2: Correlation from Simulated Channel I/O Power to Actual Channel I/O Power Supported by  $I_{DDQ}$  Measurement**

#### 1.4.1. Timings Used for IDD and IDDQ Measurement-Loop Patterns

Table 6 : Timings Used for IDD and IDDQ Measurement-Loop Patterns

| Parameter | DDR4-3200 | Unit |
|-----------|-----------|------|
|           | 22-22-22  |      |
| tCK       | 0.625     | ns   |
| CL        | 22        | nCK  |
| CWL       | 20        | nCK  |
| nRCD      | 22        | nCK  |
| nRC       | 74        | nCK  |
| nRAS      | 52        | nCK  |
| nRP       | 22        | nCK  |
| nFAW      | 48        | nCK  |
| nRRDS     | 9         | nCK  |
| nRRDL     | 11        | nCK  |
| tCCD_S    | 4         | nCK  |
| tCCD_L    | 8         | nCK  |
| tWTR_S    | 4         | nCK  |
| tWTR_L    | 12        | nCK  |
| nRFC 4Gb  | 416       | nCK  |

### 1.4.2. Basic IDD and IDDQ Measurement Conditions

**Table 7: Basic IDD, IPP and IDDQ Measurement Conditions**

| Parameter                                                  | Symbol             | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|------------------------------------------------------------|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating one bank active precharge current (AL=0)         | IDD0               | CKE: H; External clock: on; tCK, nRC, nRAS, CL: see <a href="#">Table 6</a> ; BL: 8 <sup>*1</sup> ; AL: 0; CS_n: H between ACT and PRE; Command, address, bank address inputs: partially toggling according to <a href="#">Table 8</a> ; Data I/O: VDDQ; DM_n: stable at 1; Bank activity: cycling with one bank active at a time: 0,0,1,1,2,2,... (see <a href="#">Table 8</a> ); Output buffer and RTT: enabled in MR*2; ODT signal: stable at 0; Pattern details: see <a href="#">Table 8</a>                     |
| Operating One Bank Active-Precharge Current (AL=CL-1)      | IDD0A              | AL = CL-1, Other conditions: see IDD0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Operating One Bank Active-Precharge IPP Current            | IPP0               | Same condition with IDD0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Operating one bank active-read-precharge current (AL=0)    | IDD1               | CKE: H; External clock: On; tCK, nRC, nRAS, nRCD, CL: see <a href="#">Table 6</a> ; BL: 8 <sup>*1</sup> , <sup>*6</sup> ; AL: 0; CS_n: H between ACT, RD and PRE; Command, address, bank address inputs, data I/O: partially toggling according to <a href="#">Table 9</a> ; DM_n: stable at 1; Bank activity: cycling with one bank active at a time: 0,0,1,1,2,2,... (see <a href="#">Table 9</a> ); Output buffer and RTT: enabled in MR*2; ODT Signal: stable at 0; Pattern details: see <a href="#">Table 9</a> |
| Operating One Bank Active-Read-Precharge Current (AL=CL-1) | IDD1A              | AL=CL-1, Other conditions : see IDD1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Operating One Bank Active-Read-Precharge IPPCurrent        | IPP1               | Same condition with IDD1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Precharge standby current (AL=0)                           | IDD2N              | CKE: H; External clock: on; tCK, CL: see <a href="#">Table 6</a> BL: 8 <sup>*1</sup> ; AL: 0; CS_n: stable at 1; Command, address, bank address Inputs: partially toggling according to <a href="#">Table 10</a> ; data I/O: VDDQ; DM_n: stable at 1; bank activity: all banks closed; output buffer and RTT: enabled in mode registers <sup>*2</sup> ; ODT signal: stable at 0; pattern details: see <a href="#">Table 10</a>                                                                                       |
| Precharge Standby Current (AL=CL-1)                        | IDD2NA             | AL = CL-1, Other conditions: see IDD2N                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Precharge Standby IPP Current                              | IPP2N              | Same condition with IDD2N                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Precharge standby ODT current                              | IDD2NT             | CKE: H; External clock: on; tCK, CL: see <a href="#">Table 6</a> ; BL: 8 <sup>*1</sup> ; AL: 0; CS_n: stable at 1; Command, address, bank address Inputs: partially toggling according to <a href="#">Table 11</a> ; data I/O: VSSQ; DM_n: stable at 1; bank activity: all banks closed; output buffer and RTT: enabled in MR <sup>*2</sup> ; ODT signal: toggling according to <a href="#">Table 11</a> ; pattern details: see <a href="#">Table 11</a>                                                             |
| Precharge standby ODT IDDQ current                         | IDDQ2NT (Optional) | Same definition like for IDD2NT, however measuring IDDQ current instead of IDD current                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Precharge Standby Current with CAL enabled                 | IDD2NL             | Same definition like for IDD2N, CAL enabled <sup>*3</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Precharge Standby Current with Gear Down mode enabled      | IDD2NG             | Same definition like for IDD2N, Gear Down mode enabled <sup>*3</sup> , <sup>*5</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Precharge Standby Current with DLL disabled                | IDD2ND             | Same definition like for IDD2N, DLL disabled <sup>*3</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Precharge Standby Current with CA parity enabled           | IDD2N_par          | Same definition like for IDD2N, CA parity enabled <sup>*3</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

| Parameter                                       | Symbol             | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-------------------------------------------------|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Precharge Power-Down Current                    | IDD2P              | CKE: Low; External clock: on; tCK, CL: <a href="#">see Table 6</a> ; BL: 8 <sup>*1</sup> ; AL: 0; CS_n: stable at 1; Command, address, bank group address, bank address inputs: stable at 0; data I/O: VDDQ; DM_n: stable at 1; bank activity: all banks closed; output buffer and RTT: enabled in MR <sup>*2</sup> ; ODT signal: stable at 0                                                                                                                                                                                                                                                                                                                 |
| Precharge Power-Down IPP Current                | IPP2P              | Same condition with IDD2P                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Precharge Quiet Standby Current                 | IDD2Q              | CKE: H; External clock: On; tCK, CL: <a href="#">see Table 6</a> ; BL: 8 <sup>*1</sup> ; AL: 0; CS_n: stable at 1; Command, address, bank group address, bank address Inputs: stable at 0; data I/O: VDDQ; DM_n: stable at 1; bank activity: all banks closed; output buffer and RTT: enabled in MR <sup>*2</sup> ; ODT signal: stable at 0                                                                                                                                                                                                                                                                                                                   |
| Active standby current                          | IDD3N              | CKE: H; External clock: on; tCK, CL: <a href="#">see Table 6</a> ; BL: 8 <sup>*1</sup> ; AL: 0; /CS: stable at 1; Command, address, bank group address, bank address Inputs: partially toggling according to <a href="#">Table 10</a> ; data I/O: VDDQ; DM_n: stable at 1; bank activity: all banks open; output buffer and RTT: enabled in MR <sup>*2</sup> ; ODT signal: stable at 0; pattern details: <a href="#">see Table 10</a>                                                                                                                                                                                                                         |
| Active Standby Current (AL=CL-1)                | IDD3NA             | AL = CL-1, Other conditions: <a href="#">see IDD3N</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Active Standby IPP Current                      | IPP3N              | Same condition with IDD3N                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Active power-down current                       | IDD3P              | CKE: L; External clock: on; tCK, CL: <a href="#">see Table 6</a> ; BL: 8 <sup>*1</sup> ; AL: 0; CS_n: stable at 1; Command, address, bank group address, bank address inputs: stable at 0; data I/O: VDDQ;; DM_n: stable at 1; bank activity: all banks open; output buffer and RTT: enabled in MR <sup>*2</sup> ; ODT signal: stable at 0                                                                                                                                                                                                                                                                                                                    |
| Active Power-Down IPP Current                   | IPP3P              | Same condition with IDD3P                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Operating burst read current                    | IDD4R              | CKE: H; External clock: on; tCK, CL: <a href="#">see Table 6</a> ; BL: 8 <sup>*1</sup> , <sup>*6</sup> ; AL: 0; CS_n: H between RD; Command, address, Bank group address, bank address Inputs: partially toggling according to <a href="#">Table 12</a> ; data I/O: seamless read data burst with different data between one burst and the next one according to <a href="#">Table 12</a> ; DM_n: stable at 1; Bank activity: all banks open, RD commands cycling through banks: 0,0,1,1,2,2,... (see <a href="#">Table 12</a> ); Output buffer and RTT: enabled in MR <sup>*2</sup> ; ODT signal: stable at 0; pattern details: <a href="#">see Table 12</a> |
| Operating Burst Read Current (AL=CL-1)          | IDD4RA             | AL = CL-1, Other conditions: <a href="#">see IDD4R</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Operating Burst Read Current with Read DBI      | IDD4RB             | Read DBI enabled <sup>*3</sup> , Other conditions: <a href="#">see IDD4R</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Operating Burst Read IPP Current                | IPP4R              | Same condition with IDD4R                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Operating Burst Read IDDQ Current               | IDDQ4R (Optional)  | Same definition like for IDD4R, however measuring IDDQ current instead of IDD current                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Operating Burst Read IDDQ Current with Read DBI | IDDQ4RB (Optional) | Same definition like for IDD4RB, however measuring IDDQ current instead of IDD current                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

| Parameter                                            | Symbol    | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|------------------------------------------------------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating Burst Write Current                        | IDD4W     | CKE: H; External clock: on; tCK, CL: see <a href="#">Table 6</a> ; BL: 8 <sup>*1</sup> ; AL: 0; CS_n: H between WR; command, address, bank group address, bank address inputs: partially toggling according to <a href="#">Table 13</a> ; data I/O: seamless write data burst with different data between one burst and the next one according to <a href="#">Table 13</a> ; DM_n: stable at 1; bank activity: all banks open, WR commands cycling through banks: 0,0,1,1,2,2,... (see <a href="#">Table 13</a> ); output buffer and RTT: enabled in MR <sup>*2</sup> ; ODT signal: stable at H; pattern details: see <a href="#">Table 13</a> |
| Operating Burst Write Current(AL=CL-1)               | IDD4WA    | AL = CL-1, Other conditions: see IDD4W                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Operating Burst Write Current with Write DBI         | IDD4WB    | Write DBI enabled <sup>*3</sup> , Other conditions: see IDD4W                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Operating Burst Write Current with Write CRC         | IDD4WC    | Write CRC enabled <sup>*3</sup> , Other conditions: see IDD4W                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Operating Burst Write Current with CA Parity         | IDD4W_par | CA Parity enabled <sup>*3</sup> , Other conditions: see IDD4W                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Operating Burst Write IPP Current                    | IPP4W     | Same condition with IDD4W                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Burst Refresh Current (1X REF)                       | IDD5B     | CKE: H; External clock: on; tCK, CL, nRFC: see <a href="#">Table 6</a> ; BL: 8 <sup>*1</sup> ; AL: 0; CS_n: H between REF; Command, address, bank group address, bank address Inputs: partially toggling according to <a href="#">Table 14</a> ; data I/O: VDDQ; DM_n: stable at 1; bank activity: REF command every nRFC ( <a href="#">Table 14</a> ); output buffer and RTT: enabled in MR <sup>*2</sup> ; ODT signal: stable at 0; pattern details: see <a href="#">Table 14</a>                                                                                                                                                            |
| Burst Refresh IPP Current (1X REF)                   | IPP5B     | Same condition with IDD5B                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Burst Refresh Current (2X REF)                       | IDD5F2    | tRFC=tRFC_x2, Other conditions: see IDD5B                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Burst Refresh Write IPP Current (2X REF)             | IPP5F2    | Same condition with IDD5F2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Burst Refresh Current (4X REF)                       | IDD5F4    | tRFC=tRFC_x4, Other conditions: see IDD5B                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Burst Refresh Write IPP Current (4X REF)             | IPP5F4    | Same condition with IDD5F4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Self Refresh Current: Normal Temperature Range       | IDD6N     | Industrial temperature -40 to 85°C; LP ASR: Normal <sup>*4</sup> ; CKE: L; External clock: off; CK_t and CK_c: L; CL: see <a href="#">Table 6</a> ; BL: 8 <sup>*1</sup> ; AL: 0; CS_n, command, address, bank group address, bank address, data I/O: H; DM_n: stable at 1; bank activity: self-refresh operation; Output buffer and RTT: enabled in MR <sup>*2</sup> ; ODT signal: MID-LEVEL                                                                                                                                                                                                                                                   |
| Self Refresh IPP Current: Normal Temperature Range   | IPP6N     | Same condition with IDD6N                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Self-Refresh Current: Extended Temperature Range     | IDD6E     | Industrial temperature -40 to 95°C; LP ASR: Extended <sup>*4</sup> ; CKE: L; External clock: off; CK_t and CK_c: L; CL: see <a href="#">Table 6</a> ; BL: 8 <sup>*1</sup> ; AL: 0; CS_n, command, address, bank group address, bank address, data I/O: H; DM_n: stable at 1; bank activity: Extended temperature self-refresh operation; Output buffer and RTT: enabled in MR <sup>*2</sup> ; ODT signal: MID-LEVEL                                                                                                                                                                                                                            |
| Self Refresh IPP Current: Extended Temperature Range | IPP6E     | Same condition with IDD6E                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

| Parameter                                                 | Symbol | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-----------------------------------------------------------|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Self-Refresh Current:<br>Reduced Temperature<br>Range     | IDD6R  | Industrial temperature -40 to 45°C; LP ASR: Reduced <sup>*4</sup> ; CKE: L; External clock: off; CK_t and CK_c: L; CL: see <a href="#">Table 6</a> ; BL: 8 <sup>*1</sup> ; AL: 0; CS_n, command, address, bank group address, bank address, data I/O: H; DM_n: stable at 1; bank activity: Reduced temperature self-refresh operation; Output buffer and RTT: enabled in MR <sup>*2</sup> ; ODT signal: MID-LEVEL                                                                                                                                                                                                                                                                             |
| Self Refresh IPP<br>Current: Reduced<br>Temperature Range | IPP6R  | Same condition with IDD6R                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Auto Self Refresh<br>Current                              | IDD6A  | Industrial temperature -40 to 95°C; LP ASR: Auto <sup>*4</sup> ; CKE: L; External clock: off; CK_t and CK_c: L; CL: see <a href="#">Table 6</a> ; BL: 8 <sup>*1</sup> ; AL: 0; CS_n, command, address, bank group address, bank address, data I/O: H; DM_n: stable at 1; bank activity: auto self-refresh operation; Output buffer and RTT: enabled in MR <sup>*2</sup> ; ODT signal: MID-LEVEL                                                                                                                                                                                                                                                                                               |
| Auto Self Refresh IPP<br>Current                          | IPP6A  | Same condition with IDD6A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Operating bank<br>interleave<br>read current              | IDD7   | CKE: H; External clock: on; tCK, nRC, nRAS, nRCD, nRRD, nFAW, CL: see <a href="#">Table 6</a> ; BL: 8 <sup>*1</sup> ; AL: CL-1; CS_n: H between ACT and RDA; Command, address, bank group address, bank address Inputs: partially toggling according to <a href="#">Table 15</a> ; data I/O: read data bursts with different data between one burst and the next one according to <a href="#">Table 15</a> ; DM_n: stable at 1; bank activity: two times interleaved cycling through banks (0, 1, ...7) with different addressing, see <a href="#">Table 15</a> ; output buffer and RTT: enabled in MR <sup>*2</sup> ; ODT signal: stable at 0; pattern details: see <a href="#">Table 15</a> |
| Operating Bank<br>Interleave Read IPP<br>Current          | IPP7   | Same condition with IDD7                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Maximum Power Down<br>Current                             | IDD8   | TBD                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Maximum Power Down<br>IPP Current                         | IPP8   | Same condition with IDD8                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

Notes:

- Burst Length: BL8 fixed by MRS: MR0 bits [1,0] = [0,0].
- MR: Mode Register  
Output buffer enable: set MR1 bit A12 = 0 and MR1 bits [2, 1] = [0,0]; output driver impedance control = RZQ/7  
RTT\_Nom enable: set MR1 bits A[10:8] = [0,1,1]; RTT\_Nom = RZQ/6  
RTT\_WR enable: set MR2 bits A[11:9] = [0,0,1]; RTT\_WR = RZQ/2  
RTT\_PARK disable: set MR5 bits A[8:6] = [0,0,0]
- CAL enabled: set MR4 bits A[8:6] = [0,0,1]; 1600MT/s; [0,1,0]: 1866MT/s, 2133MT/s; [0,1,1]: 2400MT/s  
Gear down mode enabled : set MR3 bit A3 = 1: 1/4 Rate  
DLL disabled: set MR1 bit A0 = 0  
CA parity enabled: set MR5 bits A[2:0] = [0,0,1]; 1600MT/s, 1866MT/s, 2133MT/s [0,1,0]: 2400MT/s  
Read DBI enabled: set MR5 bit A12 = 1  
Write DBI enabled: set :MR5 bit A11 = 1
- Low Power Array Self-Refresh (LP ASR) set MR2 bits A[7:6] = [0,0]: Normal; [0,1]: Reduced temperature range; [1,0]: Extended temperature range; [1,1]: Auto self-refresh
- IDD2NG should be measured after sync pulse(NOP) input.

Table 8: IDD0, IDD0A and IPP0 Measurement-Loop Pattern<sup>1</sup>

| CK_t /CK_c | CKE         | Sub-Loop | Cycle Number | Command                                                              | CS_n | ACT_n | RAS_n/A16 | CAS_n/ A15 | WE_n/ A14 | ODT | C[2:0] <sup>3</sup> | BG[1:0] <sup>2</sup> | BA[1:0]        | A12/BC_n | A[17,13,11] | A[10]/AP | A[9:7] | A[6:3] | A[2:0] | Data <sup>4</sup>  |   |
|------------|-------------|----------|--------------|----------------------------------------------------------------------|------|-------|-----------|------------|-----------|-----|---------------------|----------------------|----------------|----------|-------------|----------|--------|--------|--------|--------------------|---|
| toggling   | Static High | 0        | 0            | ACT                                                                  | 0    | 0     | 0         | 0          | 0         | 0   | 0                   | 0                    | 0              | 0        | 0           | 0        | 0      | 0      | 0      | -                  |   |
|            |             |          | 1,2          | D, D                                                                 | 1    | 0     | 0         | 0          | 0         | 0   | 0                   | 0                    | 0              | 0        | 0           | 0        | 0      | 0      | 0      | -                  |   |
|            |             |          | 3,4          | D#, D#                                                               | 1    | 1     | 1         | 1          | 1         | 1   | 0                   | 0                    | 3 <sup>2</sup> | 3        | 0           | 0        | 0      | 7      | F      | 0                  | - |
|            |             |          | ...          | repeat pattern 1...4 until nRAS - 1, truncate if necessary           |      |       |           |            |           |     |                     |                      |                |          |             |          |        |        |        |                    |   |
|            |             |          | nRAS         | PRE                                                                  | 0    | 1     | 0         | 1          | 0         | 0   | 0                   | 0                    | 0              | 0        | 0           | 0        | 0      | 0      | 0      | -                  |   |
|            |             |          | ...          | repeat pattern 1...4 until nRC - 1, truncate if necessary            |      |       |           |            |           |     |                     |                      |                |          |             |          |        |        |        |                    |   |
|            |             | 1        | 1*nRC        | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 1, BA[1:0] = 1 instead |      |       |           |            |           |     |                     |                      |                |          |             |          |        |        |        |                    |   |
|            |             | 2        | 2*nRC        | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 0, BA[1:0] = 2 instead |      |       |           |            |           |     |                     |                      |                |          |             |          |        |        |        |                    |   |
|            |             | 3        | 3*nRC        | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 1, BA[1:0] = 3 instead |      |       |           |            |           |     |                     |                      |                |          |             |          |        |        |        |                    |   |
|            |             | 4        | 4*nRC        | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 0, BA[1:0] = 1 instead |      |       |           |            |           |     |                     |                      |                |          |             |          |        |        |        |                    |   |
|            |             | 5        | 5*nRC        | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 1, BA[1:0] = 2 instead |      |       |           |            |           |     |                     |                      |                |          |             |          |        |        |        |                    |   |
|            |             | 6        | 6*nRC        | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 0, BA[1:0] = 3 instead |      |       |           |            |           |     |                     |                      |                |          |             |          |        |        |        |                    |   |
|            |             | 7        | 7*nRC        | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 1, BA[1:0] = 0 instead |      |       |           |            |           |     |                     |                      |                |          |             |          |        |        |        |                    |   |
|            |             | 8        | 8*nRC        | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 2, BA[1:0] = 0 instead |      |       |           |            |           |     |                     |                      |                |          |             |          |        |        |        | For x4 and x8 only |   |
|            |             | 9        | 9*nRC        | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 3, BA[1:0] = 1 instead |      |       |           |            |           |     |                     |                      |                |          |             |          |        |        |        |                    |   |
|            |             | 10       | 10*nRC       | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 2, BA[1:0] = 2 instead |      |       |           |            |           |     |                     |                      |                |          |             |          |        |        |        |                    |   |
|            |             | 11       | 11*nRC       | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 3, BA[1:0] = 3 instead |      |       |           |            |           |     |                     |                      |                |          |             |          |        |        |        |                    |   |
|            |             | 12       | 12*nRC       | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 2, BA[1:0] = 1 instead |      |       |           |            |           |     |                     |                      |                |          |             |          |        |        |        |                    |   |
|            |             | 13       | 13*nRC       | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 3, BA[1:0] = 2 instead |      |       |           |            |           |     |                     |                      |                |          |             |          |        |        |        |                    |   |
|            |             | 14       | 14*nRC       | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 2, BA[1:0] = 3 instead |      |       |           |            |           |     |                     |                      |                |          |             |          |        |        |        |                    |   |
|            |             | 15       | 15*nRC       | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 3, BA[1:0] = 0 instead |      |       |           |            |           |     |                     |                      |                |          |             |          |        |        |        |                    |   |

Notes:

1. DQS\_t, DQS\_c are VDDQ.
2. BG1 is don't care for x16 device
3. C[2:0] are used only for 3DS device
4. DQ signals are VDDQ

Table 9: IDD1, IDD1A and IPP1 Measurement-Loop Pattern<sup>1</sup>

| CK_t, CK_c | CKE         | Sub-Loop           | Cycle Number      | Command                                                                  | CS_n | ACT_n | RAS_n /A16 | CAS_n/A15 | WE_n/A14 | ODT | C[2:0] <sup>3</sup> | BG[1:0] <sup>2</sup> | BA[1:0] | A12/BC_n | A[13,11] | A[10]/AP | A[9:7] | A[6:3] | A[2:0] | Data <sup>4</sup>                                            |
|------------|-------------|--------------------|-------------------|--------------------------------------------------------------------------|------|-------|------------|-----------|----------|-----|---------------------|----------------------|---------|----------|----------|----------|--------|--------|--------|--------------------------------------------------------------|
| toggling   | Static High | 0                  | 0                 | ACT                                                                      | 0    | 0     | 0          | 0         | 0        | 0   | 0                   | 0                    | 0       | 0        | 0        | 0        | 0      | 0      | 0      | -                                                            |
|            |             |                    | 1, 2              | D, D                                                                     | 1    | 0     | 0          | 0         | 0        | 0   | 0                   | 0                    | 0       | 0        | 0        | 0        | 0      | 0      | 0      | -                                                            |
|            |             |                    | 3, 4              | D#, D#                                                                   | 1    | 1     | 1          | 1         | 1        | 0   | 0                   | 3 <sup>2</sup>       | 3       | 0        | 0        | 0        | 7      | F      | 0      | -                                                            |
|            |             |                    | ...               | repeat pattern 1...4 until nRCD - AL - 1, truncate if necessary          |      |       |            |           |          |     |                     |                      |         |          |          |          |        |        |        |                                                              |
|            |             |                    | nRCD -AL          | RD                                                                       | 0    | 1     | 1          | 0         | 1        | 0   | 0                   | 0                    | 0       | 0        | 0        | 0        | 0      | 0      | 0      | D0=00, D1=FF<br>D2=FF, D3=00<br>D4=FF, D5=00<br>D6=00, D7=FF |
|            |             |                    | ...               | repeat pattern 1...4 until nRAS - 1, truncate if necessary               |      |       |            |           |          |     |                     |                      |         |          |          |          |        |        |        |                                                              |
|            |             |                    | nRAS              | PRE                                                                      | 0    | 1     | 0          | 1         | 0        | 0   | 0                   | 0                    | 0       | 0        | 0        | 0        | 0      | 0      | 0      | -                                                            |
|            |             |                    | ...               | repeat pattern 1...4 until nRC - 1, truncate if necessary                |      |       |            |           |          |     |                     |                      |         |          |          |          |        |        |        |                                                              |
|            |             | 1                  | 1*nRC + 0         | ACT                                                                      | 0    | 0     | 0          | 1         | 1        | 0   | 0                   | 1                    | 1       | 0        | 0        | 0        | 0      | 0      | 0      | -                                                            |
|            |             |                    | 1*nRC + 1, 2      | D, D                                                                     | 1    | 0     | 0          | 0         | 0        | 0   | 0                   | 0                    | 0       | 0        | 0        | 0        | 0      | 0      | 0      | -                                                            |
|            |             |                    | 1*nRC + 3, 4      | D#, D#                                                                   | 1    | 1     | 1          | 1         | 1        | 0   | 0                   | 3 <sup>b</sup>       | 3       | 0        | 0        | 0        | 7      | F      | 0      | -                                                            |
|            |             |                    | ...               | repeat pattern nRC + 1...4 until 1*nRC + nRAS - 1, truncate if necessary |      |       |            |           |          |     |                     |                      |         |          |          |          |        |        |        |                                                              |
|            |             |                    | 1*nRC + nRCD - AL | RD                                                                       | 0    | 1     | 1          | 0         | 1        | 0   | 0                   | 1                    | 1       | 0        | 0        | 0        | 0      | 0      | 0      | D0=FF, D1=00<br>D2=00, D3=FF<br>D4=00, D5=FF<br>D6=FF, D7=00 |
|            |             |                    | ...               | repeat pattern 1...4 until nRAS - 1, truncate if necessary               |      |       |            |           |          |     |                     |                      |         |          |          |          |        |        |        |                                                              |
|            |             |                    | 1*nRC + nRAS      | PRE                                                                      | 0    | 1     | 0          | 1         | 0        | 0   | 0                   | 1                    | 1       | 0        | 0        | 0        | 0      | 0      | 0      | -                                                            |
|            |             |                    | ...               | repeat nRC + 1...4 until 2*nRC - 1, truncate if necessary                |      |       |            |           |          |     |                     |                      |         |          |          |          |        |        |        |                                                              |
|            |             | 2                  | 2*nRC             | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 0, BA[1:0] = 2 instead     |      |       |            |           |          |     |                     |                      |         |          |          |          |        |        |        |                                                              |
|            |             | 3                  | 3*nRC             | repeat Sub-Loop 1, use BG[1:0] <sup>2</sup> = 1, BA[1:0] = 3 instead     |      |       |            |           |          |     |                     |                      |         |          |          |          |        |        |        |                                                              |
|            |             | 4                  | 4*nRC             | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 0, BA[1:0] = 1 instead     |      |       |            |           |          |     |                     |                      |         |          |          |          |        |        |        |                                                              |
|            |             | 5                  | 5*nRC             | repeat Sub-Loop 1, use BG[1:0] <sup>2</sup> = 1, BA[1:0] = 2 instead     |      |       |            |           |          |     |                     |                      |         |          |          |          |        |        |        |                                                              |
|            |             | 6                  | 6*nRC             | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 0, BA[1:0] = 3 instead     |      |       |            |           |          |     |                     |                      |         |          |          |          |        |        |        |                                                              |
|            |             | 8                  | 7*nRC             | repeat Sub-Loop 1, use BG[1:0] <sup>2</sup> = 1, BA[1:0] = 0 instead     |      |       |            |           |          |     |                     |                      |         |          |          |          |        |        |        |                                                              |
|            |             | 9                  | 9*nRC             | repeat Sub-Loop 1, use BG[1:0] <sup>2</sup> = 2, BA[1:0] = 0 instead     |      |       |            |           |          |     |                     |                      |         |          |          |          |        |        |        |                                                              |
|            |             | 10                 | 10*nRC            | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 3, BA[1:0] = 1 instead     |      |       |            |           |          |     |                     |                      |         |          |          |          |        |        |        |                                                              |
|            |             | 11                 | 11*nRC            | repeat Sub-Loop 1, use BG[1:0] <sup>2</sup> = 2, BA[1:0] = 2 instead     |      |       |            |           |          |     |                     |                      |         |          |          |          |        |        |        |                                                              |
|            |             | 12                 | 12*nRC            | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 3, BA[1:0] = 3 instead     |      |       |            |           |          |     |                     |                      |         |          |          |          |        |        |        |                                                              |
|            |             | 13                 | 13*nRC            | repeat Sub-Loop 1, use BG[1:0] <sup>2</sup> = 2, BA[1:0] = 1 instead     |      |       |            |           |          |     |                     |                      |         |          |          |          |        |        |        |                                                              |
|            |             | 14                 | 14*nRC            | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 3, BA[1:0] = 2 instead     |      |       |            |           |          |     |                     |                      |         |          |          |          |        |        |        |                                                              |
|            |             | 15                 | 15*nRC            | repeat Sub-Loop 1, use BG[1:0] <sup>2</sup> = 2, BA[1:0] = 3 instead     |      |       |            |           |          |     |                     |                      |         |          |          |          |        |        |        |                                                              |
|            |             | 16                 | 16*nRC            | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 3, BA[1:0] = 0 instead     |      |       |            |           |          |     |                     |                      |         |          |          |          |        |        |        |                                                              |
|            |             | For x4 and x8 only |                   |                                                                          |      |       |            |           |          |     |                     |                      |         |          |          |          |        |        |        |                                                              |

## Notes:

1. DQS\_t, DQS\_c are used according to RD Commands, otherwise VDDQ
2. BG1 is don't care for x16 device
3. C[2:0] are used only for 3DS device
4. Burst Sequence driven on each DQ signal by Read Command. Outside burst operation, DQ signals are VDDQ

**Table 10: IDD2N, IDD2NA, IDD2NL, IDD2NG, IDD2N\_par, IPP2, IDD3N, IDD3NA, and IDD3P Measurement-Loop Pattern<sup>1</sup>**

| CK_t, CK_c | CKE         | Sub-Loop | Cycle Number | Command                                                  | CS_n | ACT_n | RAS_n/A16 | CAS_n/A15 | WE_n/A14 | ODT | C[2:0] <sup>3</sup> | BG[1:0] <sup>2</sup> | BA[1:0] | A12/BC_n | A[17,13,11] | A[10]/AP | A[9:7] | A[6:3] | A[2:0] | Data <sup>4</sup> |
|------------|-------------|----------|--------------|----------------------------------------------------------|------|-------|-----------|-----------|----------|-----|---------------------|----------------------|---------|----------|-------------|----------|--------|--------|--------|-------------------|
| toggling   | Static High | 0        | 0            | D, D                                                     | 1    | 0     | 0         | 0         | 0        | 0   | 0                   | 0                    | 0       | 0        | 0           | 0        | 0      | 0      | 0      | 0                 |
|            |             |          | 1            | D, D                                                     | 1    | 0     | 0         | 0         | 0        | 0   | 0                   | 0                    | 0       | 0        | 0           | 0        | 0      | 0      | 0      | 0                 |
|            |             |          | 2            | D#, D#                                                   | 1    | 1     | 1         | 1         | 1        | 0   | 0                   | 3 <sup>2</sup>       | 3       | 0        | 0           | 0        | 7      | F      | 0      | 0                 |
|            |             |          | 3            | D#, D#                                                   | 1    | 1     | 1         | 1         | 1        | 0   | 0                   | 3 <sup>2</sup>       | 3       | 0        | 0           | 0        | 7      | F      | 0      | 0                 |
|            |             | 1        | 4-7          | repeat Sub-Loop 0, use BG[1:0]2 = 1, BA[1:0] = 1 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |
|            |             | 2        | 8-11         | repeat Sub-Loop 0, use BG[1:0]2 = 0, BA[1:0] = 2 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |
|            |             | 3        | 12-15        | repeat Sub-Loop 0, use BG[1:0]2 = 1, BA[1:0] = 3 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |
|            |             | 4        | 16-19        | repeat Sub-Loop 0, use BG[1:0]2 = 0, BA[1:0] = 1 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |
|            |             | 5        | 20-23        | repeat Sub-Loop 0, use BG[1:0]2 = 1, BA[1:0] = 2 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |
|            |             | 6        | 24-27        | repeat Sub-Loop 0, use BG[1:0]2 = 0, BA[1:0] = 3 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |
|            |             | 7        | 28-31        | repeat Sub-Loop 0, use BG[1:0]2 = 1, BA[1:0] = 0 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |
|            |             | 8        | 32-35        | repeat Sub-Loop 0, use BG[1:0]2 = 2, BA[1:0] = 0 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |
|            |             | 9        | 36-39        | repeat Sub-Loop 0, use BG[1:0]2 = 3, BA[1:0] = 1 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |
|            |             | 10       | 40-43        | repeat Sub-Loop 0, use BG[1:0]2 = 2, BA[1:0] = 2 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |
|            |             | 11       | 44-47        | repeat Sub-Loop 0, use BG[1:0]2 = 3, BA[1:0] = 3 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |
|            |             | 12       | 48-51        | repeat Sub-Loop 0, use BG[1:0]2 = 2, BA[1:0] = 1 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |
|            |             | 13       | 52-55        | repeat Sub-Loop 0, use BG[1:0]2 = 3, BA[1:0] = 2 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |
|            |             | 14       | 56-59        | repeat Sub-Loop 0, use BG[1:0]2 = 2, BA[1:0] = 3 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |
|            |             | 15       | 60-63        | repeat Sub-Loop 0, use BG[1:0]2 = 3, BA[1:0] = 0 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |

Notes:

1. DQS\_t, DQS\_c are VDDQ
2. BG1 is don't care for x16 device
3. C[2:0] are used only for 3DS device
4. DQ signals are VDDQ

Table 11: IDD2NT and IDDQ2NT Measurement-Loop Pattern<sup>1</sup>

| CK_t, CK_c | CKE         | Sub-Loop | Cycle Number | Command                                                                          | CS_n | ACT_n | RAS_nA16 | CAS_n/A15 | WE_n/A14 | ODT | C[2:0] <sup>3</sup> | BG[1:0] <sup>2</sup> | BA[1:0] | A12/BC_n | A[17,13,11] | A[10]/AP | A[9:7] | A[6:3] | A[2:0] | Data <sup>4</sup> |
|------------|-------------|----------|--------------|----------------------------------------------------------------------------------|------|-------|----------|-----------|----------|-----|---------------------|----------------------|---------|----------|-------------|----------|--------|--------|--------|-------------------|
| toggling   | Static High | 0        | 0            | D, D                                                                             | 1    | 0     | 0        | 0         | 0        | 0   | 0                   | 0                    | 0       | 0        | 0           | 0        | 0      | 0      | 0      | -                 |
|            |             |          | 1            | D, D                                                                             | 1    | 0     | 0        | 0         | 0        | 0   | 0                   | 0                    | 0       | 0        | 0           | 0        | 0      | 0      | 0      | -                 |
|            |             |          | 2            | D#, D#                                                                           | 1    | 1     | 1        | 1         | 1        | 0   | 0                   | 3 <sup>2</sup>       | 3       | 0        | 0           | 0        | 7      | F      | 0      | -                 |
|            |             |          | 3            | D#, D#                                                                           | 1    | 1     | 1        | 1         | 1        | 0   | 0                   | 3 <sup>2</sup>       | 3       | 0        | 0           | 0        | 7      | F      | 0      | -                 |
|            |             | 1        | 4-7          | repeat Sub-Loop 0, but ODT = 1 and BG[1:0] <sup>2</sup> = 1, BA[1:0] = 1 instead |      |       |          |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |
|            |             | 2        | 8-11         | repeat Sub-Loop 0, but ODT = 0 and BG[1:0] <sup>2</sup> = 0, BA[1:0] = 2 instead |      |       |          |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |
|            |             | 3        | 12-15        | repeat Sub-Loop 0, but ODT = 1 and BG[1:0] <sup>2</sup> = 1, BA[1:0] = 3 instead |      |       |          |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |
|            |             | 4        | 16-19        | repeat Sub-Loop 0, but ODT = 0 and BG[1:0] <sup>2</sup> = 0, BA[1:0] = 1 instead |      |       |          |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |
|            |             | 5        | 20-23        | repeat Sub-Loop 0, but ODT = 1 and BG[1:0] <sup>2</sup> = 1, BA[1:0] = 2 instead |      |       |          |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |
|            |             | 6        | 24-27        | repeat Sub-Loop 0, but ODT = 0 and BG[1:0] <sup>2</sup> = 0, BA[1:0] = 3 instead |      |       |          |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |
|            |             | 7        | 28-31        | repeat Sub-Loop 0, but ODT = 1 and BG[1:0] <sup>2</sup> = 1, BA[1:0] = 0 instead |      |       |          |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |
|            |             | 8        | 32-35        | repeat Sub-Loop 0, but ODT = 0 and BG[1:0] <sup>2</sup> = 2, BA[1:0] = 0 instead |      |       |          |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |
|            |             | 9        | 36-39        | repeat Sub-Loop 0, but ODT = 1 and BG[1:0] <sup>2</sup> = 3, BA[1:0] = 1 instead |      |       |          |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |
|            |             | 10       | 40-43        | repeat Sub-Loop 0, but ODT = 0 and BG[1:0] <sup>2</sup> = 2, BA[1:0] = 2 instead |      |       |          |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |
|            |             | 11       | 44-47        | repeat Sub-Loop 0, but ODT = 1 and BG[1:0] <sup>2</sup> = 3, BA[1:0] = 3 instead |      |       |          |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |
|            |             | 12       | 48-51        | repeat Sub-Loop 0, but ODT = 0 and BG[1:0] <sup>2</sup> = 2, BA[1:0] = 1 instead |      |       |          |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |
|            |             | 13       | 52-55        | repeat Sub-Loop 0, but ODT = 1 and BG[1:0] <sup>2</sup> = 3, BA[1:0] = 2 instead |      |       |          |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |
|            |             | 14       | 56-59        | repeat Sub-Loop 0, but ODT = 0 and BG[1:0] <sup>2</sup> = 2, BA[1:0] = 3 instead |      |       |          |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |
|            |             | 15       | 60-63        | repeat Sub-Loop 0, but ODT = 1 and BG[1:0] <sup>2</sup> = 3, BA[1:0] = 0 instead |      |       |          |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |

## Notes:

1. DQS\_t, DQS\_c are VDDQ
2. BG1 is don't care for x16 device
3. C[2:0] are used only for 3DS device
4. DQ signals are VDDQ

Table 12: IDD4R, IDD4RA, IDD4RB and IDDQ4R Measurement-Loop Pattern<sup>1</sup>

| CK_t, CK_c | CKE         | Sub-Loop | Cycle Number | Command                                                              | CS_n | ACT_n | RAS_n/A16 | CAS_n/A15 | WE_n/A14 | ODT | C[2:0] <sup>3</sup> | BG[1:0] <sup>2</sup> | BA[1:0] | A12/BC_n | A[17,13,11] | A[10]/AP | A[9:7] | A[6:3] | A[2:0] | Data <sup>4</sup>                                            |
|------------|-------------|----------|--------------|----------------------------------------------------------------------|------|-------|-----------|-----------|----------|-----|---------------------|----------------------|---------|----------|-------------|----------|--------|--------|--------|--------------------------------------------------------------|
| toggling   | Static High | 0        | 0            | RD                                                                   | 0    | 1     | 1         | 0         | 1        | 0   | 0                   | 0                    | 0       | 0        | 0           | 0        | 0      | 0      | 0      | D0=00, D1=FF<br>D2=FF, D3=00<br>D4=FF, D5=00<br>D6=00, D7=FF |
|            |             |          | 1            | D                                                                    | 1    | 0     | 0         | 0         | 0        | 0   | 0                   | 0                    | 0       | 0        | 0           | 0        | 0      | 0      | -      |                                                              |
|            |             |          | 2,3          | D#, D#                                                               | 1    | 1     | 1         | 1         | 1        | 0   | 0                   | 3 <sup>2</sup>       | 3       | 0        | 0           | 0        | 7      | F      | 0      | -                                                            |
|            |             | 1        | 4            | RD                                                                   | 0    | 1     | 1         | 0         | 1        | 0   | 0                   | 1                    | 1       | 0        | 0           | 0        | 7      | F      | 0      | D0=FF, D1=00<br>D2=00, D3=FF<br>D4=00, D5=FF<br>D6=FF, D7=00 |
|            |             |          | 5            | D                                                                    | 1    | 0     | 0         | 0         | 0        | 0   | 0                   | 0                    | 0       | 0        | 0           | 0        | 0      | 0      | 0      | -                                                            |
|            |             |          | 6,7          | D#, D#                                                               | 1    | 1     | 1         | 1         | 1        | 0   | 0                   | 3 <sup>2</sup>       | 3       | 0        | 0           | 0        | 7      | F      | 0      | -                                                            |
|            |             | 2        | 8-11         | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 0, BA[1:0] = 2 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |
|            |             | 3        | 12-15        | repeat Sub-Loop 1, use BG[1:0] <sup>2</sup> = 1, BA[1:0] = 3 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |
|            |             | 4        | 16-19        | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 0, BA[1:0] = 1 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |
|            |             | 5        | 20-23        | repeat Sub-Loop 1, use BG[1:0] <sup>2</sup> = 1, BA[1:0] = 2 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |
|            |             | 6        | 24-27        | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 0, BA[1:0] = 3 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |
|            |             | 7        | 28-31        | repeat Sub-Loop 1, use BG[1:0] <sup>2</sup> = 1, BA[1:0] = 0 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |
|            |             | 8        | 32-35        | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 2, BA[1:0] = 0 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |
|            |             | 9        | 36-39        | repeat Sub-Loop 1, use BG[1:0] <sup>2</sup> = 3, BA[1:0] = 1 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |
|            |             | 10       | 40-43        | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 2, BA[1:0] = 2 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |
|            |             | 11       | 44-47        | repeat Sub-Loop 1, use BG[1:0] <sup>2</sup> = 3, BA[1:0] = 3 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |
|            |             | 12       | 48-51        | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 2, BA[1:0] = 1 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |
|            |             | 13       | 52-55        | repeat Sub-Loop 1, use BG[1:0] <sup>2</sup> = 3, BA[1:0] = 2 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |
|            |             | 14       | 56-59        | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 2, BA[1:0] = 3 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |
|            |             | 15       | 60-63        | repeat Sub-Loop 1, use BG[1:0] <sup>2</sup> = 3, BA[1:0] = 0 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |

For x4 and x8 only

Notes:

1. DQS\_t, DQS\_c are used according to RD Commands, otherwise VDDQ
2. BG1 is don't care for x16 device
3. C[2:0] are used only for 3DS device
4. Burst Sequence driven on each DQ signal by Read Command

Table 13: IDD4W, IDD4WA, IDD4WB and IDD4W\_par Measurement-Loop Pattern<sup>1</sup>

| CK_t, CK_c | CKE         | Sub-Loop | Cycle Number | Command                                                              | CS_n | ACT_n | RAS_n/A16 | CAS_n/A15 | WE_n/A14 | ODT | C[2:0] <sup>3</sup> | BG[1:0] <sup>2</sup> | BA[1:0] | A12/BC_n | A[17,13,11] | A[10]/AP | A[9:7] | A[6:3] | A[2:0] | Data <sup>4</sup>                                            |  |
|------------|-------------|----------|--------------|----------------------------------------------------------------------|------|-------|-----------|-----------|----------|-----|---------------------|----------------------|---------|----------|-------------|----------|--------|--------|--------|--------------------------------------------------------------|--|
| toggling   | Static High | 0        | 0            | WR                                                                   | 0    | 1     | 1         | 0         | 0        | 1   | 0                   | 0                    | 0       | 0        | 0           | 0        | 0      | 0      | 0      | D0=00, D1=FF<br>D2=FF, D3=00<br>D4=FF, D5=00<br>D6=00, D7=FF |  |
|            |             |          | 1            | D                                                                    | 1    | 0     | 0         | 0         | 0        | 1   | 0                   | 0                    | 0       | 0        | 0           | 0        | 0      | 0      | -      |                                                              |  |
|            |             |          | 2,3          | D#, D#                                                               | 1    | 1     | 1         | 1         | 1        | 1   | 0                   | 3 <sup>2</sup>       | 3       | 0        | 0           | 0        | 7      | F      | 0      | -                                                            |  |
|            |             | 1        | 4            | WR                                                                   | 0    | 1     | 1         | 0         | 1        | 1   | 0                   | 1                    | 1       | 0        | 0           | 0        | 7      | F      | 0      | D0=FF, D1=00<br>D2=00, D3=FF<br>D4=00, D5=FF<br>D6=FF, D7=00 |  |
|            |             |          | 5            | D                                                                    | 1    | 0     | 0         | 0         | 0        | 1   | 0                   | 0                    | 0       | 0        | 0           | 0        | 0      | 0      | 0      | -                                                            |  |
|            |             |          | 6,7          | D#, D#                                                               | 1    | 1     | 1         | 1         | 1        | 1   | 0                   | 3 <sup>2</sup>       | 3       | 0        | 0           | 0        | 7      | F      | 0      | -                                                            |  |
|            |             | 2        | 8-11         | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 0, BA[1:0] = 2 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |  |
|            |             | 3        | 12-15        | repeat Sub-Loop 1, use BG[1:0] <sup>2</sup> = 1, BA[1:0] = 3 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |  |
|            |             | 4        | 16-19        | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 0, BA[1:0] = 1 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |  |
|            |             | 5        | 20-23        | repeat Sub-Loop 1, use BG[1:0] <sup>2</sup> = 1, BA[1:0] = 2 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |  |
|            |             | 6        | 24-27        | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 0, BA[1:0] = 3 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |  |
|            |             | 7        | 28-31        | repeat Sub-Loop 1, use BG[1:0] <sup>2</sup> = 1, BA[1:0] = 0 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |  |
|            |             | 8        | 32-35        | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 2, BA[1:0] = 0 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |  |
|            |             | 9        | 36-39        | repeat Sub-Loop 1, use BG[1:0] <sup>2</sup> = 3, BA[1:0] = 1 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |  |
|            |             | 10       | 40-43        | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 2, BA[1:0] = 2 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |  |
|            |             | 11       | 44-47        | repeat Sub-Loop 1, use BG[1:0] <sup>2</sup> = 3, BA[1:0] = 3 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |  |
|            |             | 12       | 48-51        | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 2, BA[1:0] = 1 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |  |
|            |             | 13       | 52-55        | repeat Sub-Loop 1, use BG[1:0] <sup>2</sup> = 3, BA[1:0] = 2 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |  |
|            |             | 14       | 56-59        | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 2, BA[1:0] = 3 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |  |
|            |             | 15       | 60-63        | repeat Sub-Loop 1, use BG[1:0] <sup>2</sup> = 3, BA[1:0] = 0 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |  |

For x4 and x8 only

Notes:

1. DQS\_t, DQS\_c are used according to WR Commands, otherwise VDDQ
2. BG1 is don't care for x16 device
3. C[2:0] are used only for 3DS device
4. Burst Sequence driven on each DQ signal by Write Command

Table 14: IDD4WC Measurement-Loop Pattern<sup>1</sup>

| CK_t, CK_c | CKE         | Sub-Loop | Cycle Number | Command                                                              | CS_n                                                                 | ACT_n | RAS_n/A16 | CAS_n/A15 | WE_n/A14 | ODT | C[2:0] <sup>3</sup> | BG[1:0] <sup>2</sup> | BA[1:0] | A12/BC_n | A[17,13,11] | A[10]/AP | A[9:7] | A[6:3] | A[2:0] | Data <sup>4</sup>                                                      |
|------------|-------------|----------|--------------|----------------------------------------------------------------------|----------------------------------------------------------------------|-------|-----------|-----------|----------|-----|---------------------|----------------------|---------|----------|-------------|----------|--------|--------|--------|------------------------------------------------------------------------|
| toggling   | Static High | 0        | 0            | WR                                                                   | 0                                                                    | 1     | 1         | 0         | 0        | 1   | 0                   | 0                    | 0       | 0        | 0           | 0        | 0      | 0      | 0      | D0=00, D1=FF<br>D2=FF, D3=00<br>D4=FF, D5=00<br>D6=00, D7=FF<br>D8=CRC |
|            |             |          | 1,2          | D, D                                                                 | 1                                                                    | 0     | 0         | 0         | 0        | 1   | 0                   | 0                    | 0       | 0        | 0           | 0        | 0      | 0      | 0      | -                                                                      |
|            |             |          | 3,4          | D#, D#                                                               | 1                                                                    | 1     | 1         | 1         | 1        | 1   | 0                   | 3 <sup>2</sup>       | 3       | 0        | 0           | 0        | 7      | F      | 0      | -                                                                      |
|            |             |          | 5            | WR                                                                   | 0                                                                    | 1     | 1         | 0         | 1        | 1   | 0                   | 1                    | 1       | 0        | 0           | 0        | 7      | F      | 0      | D0=FF, D1=00<br>D2=00, D3=FF<br>D4=00, D5=FF<br>D6=FF, D7=00<br>D8=CRC |
|            |             |          | 6,7          | D, D                                                                 | 1                                                                    | 0     | 0         | 0         | 0        | 1   | 0                   | 0                    | 0       | 0        | 0           | 0        | 0      | 0      | 0      | -                                                                      |
|            |             |          | 8,9          | D#, D#                                                               | 1                                                                    | 1     | 1         | 1         | 1        | 1   | 0                   | 3 <sup>2</sup>       | 3       | 0        | 0           | 0        | 7      | F      | 0      | -                                                                      |
|            |             |          | 2            | 10-14                                                                | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 0, BA[1:0] = 2 instead |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                                        |
|            |             | 3        | 15-19        | repeat Sub-Loop 1, use BG[1:0] <sup>2</sup> = 1, BA[1:0] = 3 instead |                                                                      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                                        |
|            |             | 4        | 20-24        | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 0, BA[1:0] = 1 instead |                                                                      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                                        |
|            |             | 5        | 25-29        | repeat Sub-Loop 1, use BG[1:0] <sup>2</sup> = 1, BA[1:0] = 2 instead |                                                                      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                                        |
|            |             | 6        | 30-34        | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 0, BA[1:0] = 3 instead |                                                                      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                                        |
|            |             | 7        | 35-39        | repeat Sub-Loop 1, use BG[1:0] <sup>2</sup> = 1, BA[1:0] = 0 instead |                                                                      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                                        |
|            |             | 8        | 40-44        | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 2, BA[1:0] = 0 instead |                                                                      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                                        |
|            |             | 9        | 45-49        | repeat Sub-Loop 1, use BG[1:0] <sup>2</sup> = 3, BA[1:0] = 1 instead |                                                                      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                                        |
|            |             | 10       | 50-54        | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 2, BA[1:0] = 2 instead |                                                                      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                                        |
|            |             | 11       | 55-59        | repeat Sub-Loop 1, use BG[1:0] <sup>2</sup> = 3, BA[1:0] = 3 instead |                                                                      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                                        |
|            |             | 12       | 60-64        | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 2, BA[1:0] = 1 instead |                                                                      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                                        |
|            |             | 13       | 65-69        | repeat Sub-Loop 1, use BG[1:0] <sup>2</sup> = 3, BA[1:0] = 2 instead |                                                                      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                                        |
|            |             | 14       | 70-74        | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 2, BA[1:0] = 3 instead |                                                                      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                                        |
|            |             | 15       | 75-79        | repeat Sub-Loop 1, use BG[1:0] <sup>2</sup> = 3, BA[1:0] = 0 instead |                                                                      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                                        |

For x4 and x8 only

Notes:

1. DQS\_t, DQS\_c are VDDQ
2. BG1 is don't care for x16 device
3. C[2:0] are used only for 3DS device
4. Burst Sequence driven on each DQ signal by Write Command

Table 15: IDD5B Measurement-Loop Pattern<sup>1</sup>

| CK_t, CK_c | CKE         | Sub-Loop | Cycle Number    | Command                                                                 | CS_n | ACT_n | RAS_n/A16 | CAS_n/A15 | WE_n/A14 | ODT | C[2:0] <sup>3</sup> | BG[1:0] <sup>2</sup> | BA[1:0] | A12/BC_n | A[17,13,11] | A[10]/AP | A[9:7] | A[6:3] | A[2:0] | Data <sup>4</sup> |
|------------|-------------|----------|-----------------|-------------------------------------------------------------------------|------|-------|-----------|-----------|----------|-----|---------------------|----------------------|---------|----------|-------------|----------|--------|--------|--------|-------------------|
| toggling   | Static High | 0        | 0               | REF                                                                     | 1    | 0     | 0         | 0         | 0        | 0   | 0                   | 0                    | 0       | 0        | 0           | 0        | 0      | 0      | 0      | -                 |
|            |             | 1        | 1               | D                                                                       | 1    | 0     | 0         | 0         | 0        | 0   | 0                   | 0                    | 0       | 0        | 0           | 0        | 0      | 0      | 0      | -                 |
|            |             |          | 2               | D                                                                       | 1    | 0     | 0         | 0         | 0        | 0   | 0                   | 0                    | 0       | 0        | 0           | 0        | 0      | 0      | 0      | -                 |
|            |             |          | 3               | D#, D#                                                                  | 1    | 1     | 1         | 1         | 1        | 0   | 0                   | 3 <sup>2</sup>       | 3       | 0        | 0           | 0        | 7      | F      | 0      | -                 |
|            |             |          | 4               | D#, D#                                                                  | 1    | 1     | 1         | 1         | 1        | 0   | 0                   | 3 <sup>2</sup>       | 3       | 0        | 0           | 0        | 7      | F      | 0      | -                 |
|            |             |          | 4-7             | repeat pattern 1...4, use BG[1:0] <sup>2</sup> = 1, BA[1:0] = 1 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |
|            |             |          | 8-11            | repeat pattern 1...4, use BG[1:0] <sup>2</sup> = 0, BA[1:0] = 2 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |
|            |             |          | 12-15           | repeat pattern 1...4, use BG[1:0] <sup>2</sup> = 1, BA[1:0] = 3 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |
|            |             |          | 16-19           | repeat pattern 1...4, use BG[1:0] <sup>2</sup> = 0, BA[1:0] = 1 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |
|            |             |          | 20-23           | repeat pattern 1...4, use BG[1:0] <sup>2</sup> = 1, BA[1:0] = 2 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |
|            |             |          | 24-27           | repeat pattern 1...4, use BG[1:0] <sup>2</sup> = 0, BA[1:0] = 3 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |
|            |             |          | 28-31           | repeat pattern 1...4, use BG[1:0] <sup>2</sup> = 1, BA[1:0] = 0 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |
|            |             |          | 32-35           | repeat pattern 1...4, use BG[1:0] <sup>2</sup> = 2, BA[1:0] = 0 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |
|            |             |          | 36-39           | repeat pattern 1...4, use BG[1:0] <sup>2</sup> = 3, BA[1:0] = 1 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |
|            |             |          | 40-43           | repeat pattern 1...4, use BG[1:0] <sup>2</sup> = 2, BA[1:0] = 2 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |
|            |             |          | 44-47           | repeat pattern 1...4, use BG[1:0] <sup>2</sup> = 3, BA[1:0] = 3 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |
|            |             |          | 48-51           | repeat pattern 1...4, use BG[1:0] <sup>2</sup> = 2, BA[1:0] = 1 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |
|            |             |          | 52-55           | repeat pattern 1...4, use BG[1:0] <sup>2</sup> = 3, BA[1:0] = 2 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |
|            |             |          | 56-59           | repeat pattern 1...4, use BG[1:0] <sup>2</sup> = 2, BA[1:0] = 3 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |
|            |             |          | 60-63           | repeat pattern 1...4, use BG[1:0] <sup>2</sup> = 3, BA[1:0] = 0 instead |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |
|            |             | 2        | 64 ... nRFC - 1 | repeat Sub-Loop 1, Truncate, if necessary                               |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                   |

Notes:

1. DQS\_t, DQS\_c are VDDQ
2. BG1 is don't care for x16 device
3. C[2:0] are used only for 3DS device
4. DQ signals are VDDQ

Table 16: IDD7 Measurement-Loop Pattern<sup>1</sup>

| CK_t, CK_c | CKE         | Sub-Loop | Cycle Number    | Command                                                                        | CS_n | ACT_n | RAS_n/A16 | CAS_n/A15 | WE_n/A14 | ODT | C[2:0] <sup>3</sup> | BG[1:0] <sup>2</sup> | BA[1:0] | A12/BC_n | A[17,13,11] | A[10]/AP | A[9:7] | A[6:3] | A[2:0] | Data <sup>4</sup>                                            |
|------------|-------------|----------|-----------------|--------------------------------------------------------------------------------|------|-------|-----------|-----------|----------|-----|---------------------|----------------------|---------|----------|-------------|----------|--------|--------|--------|--------------------------------------------------------------|
| toggling   | Static High | 0        | 0               | ACT                                                                            | 0    | 0     | 0         | 0         | 0        | 0   | 0                   | 0                    | 0       | 0        | 0           | 0        | 0      | 0      | 0      | -                                                            |
|            |             |          | 1               | RDA                                                                            | 0    | 1     | 1         | 0         | 1        | 0   |                     | 0                    | 0       | 0        | 0           | 1        | 0      | 0      | 0      | D0=00, D1=FF<br>D2=FF, D3=00<br>D4=FF, D5=00<br>D6=00, D7=FF |
|            |             |          | 2               | D                                                                              | 1    | 0     | 0         | 0         | 0        | 0   | 0                   | 0                    | 0       | 0        | 0           | 0        | 0      | 0      | 0      | -                                                            |
|            |             |          | 3               | D#                                                                             | 1    | 1     | 1         | 1         | 1        | 0   | 0                   | 3 <sup>2</sup>       | 3       | 0        | 0           | 0        | 7      | F      | 0      | -                                                            |
|            |             |          | ...             | repeat pattern 2...3 until nRRD - 1, if nRRD > 4. Truncate if necessary        |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |
|            |             | 1        | nRRD            | ACT                                                                            | 0    | 0     | 0         | 0         | 0        | 0   | 0                   | 1                    | 1       | 0        | 0           | 0        | 0      | 0      | 0      | -                                                            |
|            |             |          | nRRD + 1        | RDA                                                                            | 0    | 1     | 1         | 0         | 1        | 0   |                     | 1                    | 1       | 0        | 0           | 1        | 0      | 0      | 0      | D0=FF, D1=00<br>D2=00, D3=FF<br>D4=00, D5=FF<br>D6=FF, D7=00 |
|            |             |          | ...             | repeat pattern 2 ... 3 until 2*nRRD - 1, if nRRD > 4. Truncate if necessary    |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |
|            |             | 2        | 2*nRRD          | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 0, BA[1:0] = 2 instead           |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |
|            |             | 3        | 3*nRRD          | repeat Sub-Loop 1, use BG[1:0] <sup>2</sup> = 1, BA[1:0] = 3 instead           |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |
|            |             | 4        | 4*nRRD          | repeat pattern 2 ... 3 until nFAW - 1, if nFAW > 4*nRRD. Truncate if necessary |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |
|            |             | 5        | nFAW            | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 0, BA[1:0] = 1 instead           |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |
|            |             | 6        | nFAW + nRRD     | repeat Sub-Loop 1, use BG[1:0] <sup>2</sup> = 1, BA[1:0] = 2 instead           |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |
|            |             | 7        | nFAW + 2*nRRD   | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 0, BA[1:0] = 3 instead           |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |
|            |             | 8        | nFAW + 3*nRRD   | repeat Sub-Loop 1, use BG[1:0] <sup>2</sup> = 1, BA[1:0] = 0 instead           |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |
|            |             | 9        | nFAW + 4*nRRD   | repeat Sub-Loop 4                                                              |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |
|            |             | 10       | 2*nFAW          | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 2, BA[1:0] = 0 instead           |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |
|            |             | 11       | 2*nFAW + nRRD   | repeat Sub-Loop 1, use BG[1:0] <sup>2</sup> = 3, BA[1:0] = 1 instead           |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |
|            |             | 12       | 2*nFAW + 2*nRRD | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 2, BA[1:0] = 2 instead           |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |
|            |             | 13       | 2*nFAW + 3*nRRD | repeat Sub-Loop 1, use BG[1:0] <sup>2</sup> = 3, BA[1:0] = 3 instead           |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |
|            |             | 14       | 2*nFAW + 4*nRRD | repeat Sub-Loop 4                                                              |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |
|            |             | 15       | 3*nFAW          | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 2, BA[1:0] = 1 instead           |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |
|            |             | 16       | 3*nFAW + nRRD   | repeat Sub-Loop 1, use BG[1:0] <sup>2</sup> = 3, BA[1:0] = 2 instead           |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |
|            |             | 17       | 3*nFAW + 2*nRRD | repeat Sub-Loop 0, use BG[1:0] <sup>2</sup> = 2, BA[1:0] = 3 instead           |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |
|            |             | 18       | 3*nFAW + 3*nRRD | repeat Sub-Loop 1, use BG[1:0] <sup>2</sup> = 3, BA[1:0] = 0 instead           |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |
|            |             | 19       | 3*nFAW + 4*nRRD | repeat Sub-Loop 4                                                              |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |
|            |             | 20       | 4*nFAW          | repeat pattern 2 ... 3 until nRC - 1, if nRC > 4*nFAW. Truncate if necessary   |      |       |           |           |          |     |                     |                      |         |          |             |          |        |        |        |                                                              |

## Notes:

1. DQS\_t, DQS\_c are VDDQ
2. BG1 is don't care for x16 device
3. C[2:0] are used only for 3DS device
4. Burst Sequence driven on each DQ signal by Read Command. Outside burst operation, DQ signals are VDDQ

## 2. Electrical Specifications

### 2.1 IDD Specifications

IDD and IPP values are for full operating range of voltage and temperature unless otherwise noted. IDD and IPP values are for full operating range of voltage and temperature unless otherwise noted.

**Table 17: IDD and IDDQ Specification**

| Parameter                                             | Symbol    | DDR4-3200 | unit |
|-------------------------------------------------------|-----------|-----------|------|
|                                                       |           | x16       |      |
| Operating current<br>(ACT-PRE)                        | IDD0      | 82        | mA   |
|                                                       | IDD0A     | 82        | mA   |
| Operating current<br>(ACT-RD-PRE)                     | IDD1      | 108       | mA   |
|                                                       | IDD1A     | 111       | mA   |
| Precharge Standby current                             | IDD2N     | 59        | mA   |
|                                                       | IDD2NA    | 59        | mA   |
| Precharge Standby ODT current                         | IDD2NT    | 79        | mA   |
| Precharge Standby Current with CAL enabled            | IDD2NL    | 37        | mA   |
| Precharge Standby Current with Gear Down mode enabled | IDD2NG    | 58        | mA   |
| Precharge Standby Current with DLL disabled           | IDD2ND    | 66        | mA   |
| Precharge Standby Current with CA parity enabled      | IDD2N_par | 70        | mA   |
| Precharge Power-Down Current                          | IDD2P     | 28        | mA   |
| Precharge quiet standby current                       | IDD2Q     | 37        | mA   |
| Active standby current                                | IDD3N     | 84        | mA   |
| Active Standby Current (AL=CL-1)                      | IDD3NA    | 85        | mA   |
| Active power-down current                             | IDD3P     | 45        | mA   |
| Operating current (Burst read operating)              | IDD4R     | 278       | mA   |
| Operating Burst Read Current (AL=CL-1)                | IDD4RA    | 300       | mA   |
| Operating Burst Read Current with Read DBI            | IDD4RB    | 283       | mA   |
| Operating current<br>(Burst write operating)          | IDD4W     | 268       | mA   |
| Operating Burst Write Current(AL=CL-1)                | IDD4WA    | 278       | mA   |
| Operating Burst Write Current with Write DBI          | IDD4WB    | 269       | mA   |
| Operating Burst Write Current with Write CRC          | IDD4WC    | 348       | mA   |
| Operating Burst Write Current with CA Parity          | IDD4W_par | 293       | mA   |
| Burst refresh current                                 | IDD5B     | 148       | mA   |
| Burst Refresh Current (2X REF)                        | IDD5F2    | 132       | mA   |
| Burst Refresh Current (4X REF)                        | IDD5F4    | 117       | mA   |
| All bank interleave read current                      | IDD7      | 256       | mA   |
| RESET low current                                     | IDD8      | 21        | mA   |

Note: Published IDD values are the maximum of the distribution of the arithmetic mean and are measured at 95 °C

**Table 18: IPP Specification**

| Symbol      | DDR4-3200 | Unit | Note |
|-------------|-----------|------|------|
|             | x16       |      |      |
| $I_{PP0}$   | 6         | mA   |      |
| $I_{PP1}$   | 6         | mA   |      |
| $I_{PP2N}$  | 1.2       | mA   |      |
| $I_{PP2P}$  | 1.2       | mA   |      |
| $I_{PP3N}$  | 1.2       | mA   |      |
| $I_{PP3P}$  | 1.2       | mA   |      |
| $I_{PP4R}$  | 1.2       | mA   |      |
| $I_{PP4W}$  | 1.2       | mA   |      |
| $I_{PP5B}$  | 36        | mA   |      |
| $I_{PP5F2}$ | 31        | mA   |      |
| $I_{PP5F4}$ | 24        | mA   |      |
| $I_{PP6N}$  | 2.5       | mA   |      |
| $I_{PP6E}$  | 3.7       | mA   |      |
| $I_{PP6R}$  | 1.7       | mA   |      |
| $I_{PP6A}$  | 3.7       | mA   |      |
| $I_{PP7}$   | 34        | mA   |      |
| $I_{PP8}$   | 1         | mA   |      |

Notes:

1. User should refer to the DRAM supplier data sheet and/or the DIMM SPD to determine if DDR4 SDRAM devices support the following options or requirements referred to in this material.

**Table 19: IDD6 Specification**

| Parameter                                        | Symbol | Temperature Range | DDR4-3200 | unit | Notes |
|--------------------------------------------------|--------|-------------------|-----------|------|-------|
|                                                  |        |                   | x16       |      |       |
| Self Refresh Current: Normal Temperature Range   | IDD6N  | 0 - 85 °C         | 19        | mA   | 1     |
| Self-Refresh Current: Extended Temperature Range | IDD6E  | 0 - 95 °C         | 30        | mA   | 2     |
| Self-Refresh Current: Reduced Temperature Range  | IDD6R  | 0 - 45 °C         | 8.5       | mA   | 3     |
| Auto Self Refresh Current                        | IDD6A  | 0 - 95 °C         | 30        | mA   | 4     |

Notes:

1. Applicable for MR2 settings A6 = 0 and A7 = 0
2. Applicable for MR2 settings A6 = 0 and A7 = 1 . IDD6E is only specified for devices which support the extended temperature range feature C[2:0] are used only for 3DS device
3. Applicable for MR2 settings A6 = 1 and A7 = 0. IDD6R is only specified for devices which support the reduced temperature range feature
4. Applicable for MR2 settings A6 = 1 and A7 = 0. IDD6A is only specified for devices which support the auto self-refresh feature

## 2.2 Pin Capacitance

**Table 20: Silicon pad I/O Capacitance**

| Parameter                                      | Symbol             | DDR4-3200 |      | Unit | NOTE     |
|------------------------------------------------|--------------------|-----------|------|------|----------|
|                                                |                    | min       | max  |      |          |
| Input/output capacitance                       | $C_{IO}$           | 0.55      | 1.00 | pF   | 1,2,3    |
| Input/output capacitance delta                 | $C_{DIO}$          | -0.1      | 0.1  | pF   | 1,2,3,11 |
| Input/output capacitance delta DQS_t and DQS_c | $C_{DDQS}$         | -         | 0.05 | pF   | 1,2,3,5  |
| Input capacitance, CK_t and CK_c               | $C_{CK}$           | 0.2       | 0.7  | pF   | 1,3      |
| Input capacitance delta CK_t and CK_c          | $C_{DCK}$          | -         | 0.05 | pF   | 1,3,4    |
| Input capacitance(CTRL, ADD, CMD pins only)    | $C_I$              | 0.2       | 0.55 | pF   | 1,3,6    |
| Input capacitance delta(All CTRL pins only)    | $C_{DI\_CTRL}$     | -0.1      | 0.1  | pF   | 1,3,7,8  |
| Input capacitance delta(All ADD/CMD pins only) | $C_{DI\_ADD\_CMD}$ | -0.1      | 0.1  | pF   | 1,2,9,10 |
| Input/output capacitance of ALERT              | $C_{ALERT}$        | 0.5       | 1.5  | pF   | 1,3      |
| Input/output capacitance of ZQ                 | $C_{ZQ}$           | -         | 2.3  | pF   | 1,3,12   |
| Input capacitance of TEN                       | $C_{TEN}$          | 0.2       | 2.3  | pF   | 1,3,13   |

**Notes:**

1. This parameter is not subject to production test. It is verified by design and characterization. The silicon only capacitance is validated by de-embedding the package L & C parasitic. The capacitance is measured with VDD, VDDQ, VSS, VSSQ applied with all other signal pins floating. Measurement procedure TBDApplicable for MR2 settings A6 = 0 and A7 =1 . IDD6E is only specified for devices which support the extended temperature range feature C[2:0] are used only for 3DS device
2. DQ, DM\_n, DQS\_T, DQS\_C, TDQS\_T, TDQS\_C. Although the DM, TDQS\_T and TDQS\_C pins have different functions, the loading matches DQ and DQS
3. This parameter applies to monolithic devices only; stacked/dual-die devices are not covered here
4. Absolute value CK\_T-CK\_C
5. Absolute value of CIO(DQS\_T)-CIO(DQS\_C)
6. CI applies to ODT, CS\_n, CKE, A0-A15, BA0-BA1, BG0-BG1, RAS\_n, CAS\_n/A15, WE\_n/A14, ACT\_n and PAR
7. CDI CTRL applies to ODT, CS\_n and CKE
8.  $CDI\_CTRL = CI(CTRL) - 0.5 * (CI(CLK\_T) + CI(CLK\_C))$
9. CDI\_ADD\_CMD applies to, A0-A15, BA0-BA1, BG0-BG1, RAS\_n, CAS\_n/A15, WE\_n/A14, ACT\_n and PAR
10.  $CDI\_ADD\_CMD = CI(ADD\_CMD) - 0.5 * (CI(CLK\_T) + CI(CLK\_C))$
11.  $CDIO = CIO(DQ, DM) - 0.5 * (CIO(DQS\_T) + CIO(DQS\_C))$
12. Maximum external load capacitance on ZQ pin: TBD pF
13. TEN pin is DRAM internally pulled low through a weak pull-down resistor to VSS

**Table 21 : DRAM package electrical specifications(x16)**

| Symbol           | Parameter                     | DDR4-3200 |      | Unit | NOTE |
|------------------|-------------------------------|-----------|------|------|------|
|                  |                               | min       | max  |      |      |
| $Z_{IO}$         | Input/output Zpkg             | 45        | 85   | W    | 1    |
| $T_{dIO}$        | Input/output Pkg Delay        | 14        | 45   | ps   | 1    |
| $L_{io}$         | Input/Output Lpkg             | -         | 3.4  | nH   | 1, 2 |
| $C_{io}$         | Input/Output Cpkg             | -         | 0.82 | pF   | 1, 3 |
| $Z_{IO\ DQS}$    | DQS_t, DQS_c Zpkg             | 45        | 85   | W    | 1    |
| $T_{dIO\ DQS}$   | DQS_t, DQS_c Pkg Delay        | 14        | 45   | ps   | 1    |
| $L_{io\ DQS}$    | DQS Lpkg                      | -         | 3.4  | nH   | 1, 2 |
| $C_{io\ DQS}$    | DQS Cpkg                      | -         | 0.82 | pF   | 1, 3 |
| $DZ_{DIO\ DQS}$  | Delta Zpkg DQSU_t, DQSU_c     | -         | 10   | W    | -    |
| $D_{TdDIO\ DQS}$ | Delta Delay DQSU_t, DQSU_c    | -         | 5    | ps   | -    |
| $Z_I\ CTRL$      | Input- CTRL pins Zpkg         | 50        | 90   | W    | 1    |
| $T_{dI\ CTRL}$   | Input- CTRL pins Pkg Delay    | 14        | 42   | ps   | 1    |
| $L_I\ CTRL$      | Input CTRL Lpkg               | -         | 3.4  | nH   | 1, 2 |
| $C_I\ CTRL$      | Input CTRL Cpkg               | -         | 0.7  | pF   | 1, 3 |
| $Z_{IADD\ CMD}$  | Input- CMD ADD pins Zpkg      | 50        | 90   | W    | 1    |
| $T_{dIADD\ CMD}$ | Input- CMD ADD pins Pkg Delay | 14        | 52   | ps   | 1    |
| $L_I\ ADD\ CMD$  | Input CMD ADD Lpkg            | -         | 3.9  | nH   | 1, 2 |
| $C_I\ ADD\ CMD$  | Input CMD ADD Cpkg            | -         | 0.86 | pF   | 1, 3 |
| $Z_{CK}$         | CLK_t & CLK_c Zpkg            | 50        | 90   | W    | 1    |
| $T_{dCK}$        | CLK_t & CLK_c Pkg Delay       | 14        | 42   | ps   | 1    |
| $L_I\ CLK$       | Input CLK Lpkg                | -         | 3.4  | nH   | 1, 2 |
| $C_I\ CLK$       | Input CLK Cpkg                | -         | 0.7  | pF   | 1, 3 |
| $DZ_{DCK}$       | Delta Zpkg CLK_t & CLK_c      | -         | 10   | W    | -    |
| $D_{TdCK}$       | Delta Delay CLK_t & CLK_c     | -         | 5    | ps   | -    |
| $Z_{OZQ}$        | ZQ Zpkg                       | -         | 100  | W    | -    |
| $T_{dO\ ZQ}$     | ZQ Delay                      | 20        | 90   | ps   | -    |
| $Z_{O\ ALERT}$   | ALERT Zpkg                    | 40        | 100  | W    | -    |
| $T_{dO\ ALERT}$  | ALERT Delay                   | 20        | 55   | ps   | -    |

Notes:

1. Package implementations shall meet spec if the Zpkg and Pkg Delay fall within the ranges shown, and the maximum Lpkg and Cpkg do not exceed the maximum value shown
2. It is assumed that Lpkg can be approximated as  $Lpkg = Z_o * T_d$
3. It is assumed that Cpkg can be approximated as  $Cpkg = T_d / Z_o$

## 2.3 Standard Speed Bins

**Table 22: DDR4-3200 Speed Bins and Operations**

| Speed Bin                                                 |         |                 | DDR4-3200                                 |                   | Unit | NOTE        |
|-----------------------------------------------------------|---------|-----------------|-------------------------------------------|-------------------|------|-------------|
| CL-nRCD-nRP                                               |         | 22-22-22        |                                           |                   |      |             |
| Parameter                                                 | Symbol  | min             | max                                       |                   |      |             |
| Internal read command to first data                       | tAA     | 13.75           | 18.00                                     | ns                | 11   |             |
| Internal read command to first data with read DBI enabled | tAA_DBI | tAA(min) + 4nCK | tAA(max) +4nCK                            | ns                | 11   |             |
| ACT to internal read or write delay time                  | tRCD    | 13.75           | -                                         | ns                | 11   |             |
| PRE command period                                        | tRP     | 13.75           | -                                         | ns                | 11   |             |
| ACT to PRE command period                                 | tRAS    | 32              | 9 x tREFI                                 | ns                | 11   |             |
| ACT to ACT or REF command period                          | tRC     | 45.75           | -                                         | ns                | 11   |             |
|                                                           | Normal  | Read DBI        |                                           |                   |      |             |
| CWL =9                                                    | CL = 9  | CL = 11         | tCK(AVG)                                  | Reserved          | ns   | 4           |
|                                                           | CL = 10 | CL = 12         | tCK(AVG)                                  | 1.5      1.6      | ns   | 1,2,3,10,15 |
| CWL = 9,11                                                | CL = 10 | CL = 12         | tCK(AVG)                                  | Reserved          | ns   | 4           |
|                                                           | CL = 11 | CL = 13         | tCK(AVG)                                  | 1.25      <1.5    | ns   | 1,2,3,10,15 |
|                                                           | CL = 12 | CL = 14         | tCK(AVG)                                  | 1.25      <1.5    | ns   | 1,2,3,10,15 |
| CWL = 10,12                                               | CL = 12 | CL = 14         | tCK(AVG)                                  | Reserved          | ns   | 4           |
|                                                           | CL = 13 | CL = 15         | tCK(AVG)                                  | 1.071      <1.25  | ns   | 1,2,3,10,15 |
|                                                           | CL = 14 | CL = 16         | tCK(AVG)                                  | 1.071      <1.25  | ns   | 1,2,3,10,15 |
| CWL = 11,14                                               | CL = 14 | CL = 17         | tCK(AVG)                                  | Reserved          | ns   | 4           |
|                                                           | CL = 15 | CL = 18         | tCK(AVG)                                  | 0.937      <1.071 | ns   | 1,2,3,10,15 |
|                                                           | CL = 16 | CL = 19         | tCK(AVG)                                  | 0.937      <1.071 | ns   | 1,2,3,10,15 |
| CWL = 12,16                                               | CL = 15 | CL = 18         | tCK(AVG)                                  | Reserved          | ns   | 4           |
|                                                           | CL = 16 | CL = 19         | tCK(AVG)                                  | Reserved          | ns   | 4           |
|                                                           | CL = 17 | CL = 20         | tCK(AVG)                                  | 0.833      <0.937 | ns   | 1,2,3,10,15 |
|                                                           | CL = 18 | CL = 21         | tCK(AVG)                                  | 0.833      <0.937 | ns   | 1,2,3,10,15 |
| CWL = 14,18                                               | CL = 17 | CL = 20         | tCK(AVG)                                  | Reserved          | ns   | 4           |
|                                                           | CL = 18 | CL = 21         | tCK(AVG)                                  | Reserved          | ns   | 4           |
|                                                           | CL = 19 | CL = 22         | tCK(AVG)                                  | 0.75      <0.833  | ns   | 1,2,3,10,15 |
|                                                           | CL = 20 | CL = 23         | tCK(AVG)                                  | 0.75      <0.833  | ns   | 1,2,3,10,15 |
| CWL = 16, 20                                              | CL = 20 | CL = 24         | tCK(AVG)                                  | Reserved          | ns   | 4           |
|                                                           | CL = 21 | CL = 25         | tCK(AVG)                                  | 0.682      <0.75  | ns   | 1,2,3,10,15 |
|                                                           | CL = 22 | CL = 26         | tCK(AVG)                                  | 0.682      <0.75  | ns   | 1,2,3,10,15 |
|                                                           | CL = 24 | CL = 28         | tCK(AVG)                                  | 0.682      <0.75  | ns   | 1,2,3,10,15 |
| CWL = 16, 20                                              | CL = 20 | CL = 24         | tCK(AVG)                                  | Reserved          | ns   | 4           |
|                                                           | CL = 22 | CL = 26         | tCK(AVG)                                  | 0.625      <0.682 | ns   | 1,2,3,10,15 |
|                                                           | CL = 24 | CL = 28         | tCK(AVG)                                  | 0.625      <0.682 | ns   | 1,2,3,10,15 |
| Supported CL Settings                                     |         |                 | 10,11,12,13,14,15,16,17,18,19,20,21,22,24 |                   | nCK  | 12,15       |
| Supported CL Settings with read DBI                       |         |                 | 12,13,14,15,16,18,19,20,21,22,23,25,26,28 |                   | nCK  | 15          |
| Supported CWL Settings                                    |         |                 | 9,10,11,12,14,16,18,20                    |                   | nCK  | 15          |

## Speed Bin Table Notes

### Absolute Specification

- VDDQ = VDD = 1.20V +/- 0.06 V

- VPP = 2.5V +0.25/-0.125 V

- The values defined with above-mentioned table are DLL ON case.

1. The CL setting and CWL setting result in tCK(avg).MIN and tCK(avg).MAX requirements. When making a selection of tCK(avg), both need to be fulfilled: Requirements from CL setting as well as requirements from CWL setting.
2. tCK(avg).MIN limits: Since CAS Latency is not purely analog - data and strobe output are synchronized by the DLL - all possible intermediate frequencies may not be guaranteed. An application should use the next smaller JEDEC standard tCK(avg) value (1.5, 1.25, 1.071, 0.938 or 0.833 ns) when calculating CL [nCK] = tAA [ns] / tCK(avg) [ns], rounding up to the next 'Supported CL', where tAA = 12.5ns and tCK(avg) = 1.3 ns should only be used for CL = 10 calculation.
3. tCK(avg).MAX limits: Calculate tCK(avg) = tAA.MAX / CL SELECTED and round the resulting tCK(avg) down to the next valid speed bin (i.e. 1.5ns or 1.25ns or 1.071 ns or 0.938 ns or 0.833 ns). This result is tCK(avg).MAX corresponding to CL SELECTED.
4. 'Reserved' settings are not allowed. User must program a different value.
5. 'Optional' settings allow certain devices in the industry to support this setting, however, it is not a mandatory feature. Refer to supplier's data sheet and/or the DIMM SPD information if and how this setting is supported.
6. Any DDR4-2666 speed bin also supports functional operation at lower frequencies as shown in the table which are not subject to Production Tests but verified by Design/Characterization.
7. Any DDR4-3200 speed bin also supports functional operation at lower frequencies as shown in the table which are not subject to Production Tests but verified by Design/Characterization.
8. Parameters apply from tCK(avg)min to tCK(avg)max at all standard JEDEC clock period values as stated in the Speed Bin Tables.
9. CL number in parentheses, it means that these numbers are optional.
10. DDR4 SDRAM supports CL=9 as long as a system meets tAA(min).
11. Each speed bin lists the timing requirements that need to be supported in order for a given DRAM to be JEDEC compliant. JEDEC compliance does not require support for all speed bins within a given speed. JEDEC compliance requires meeting the parameters for at least one of the listed speed bins.
12. Supporting CL setting herewith is a reference base on JEDEC's. Precise CL & tCK setting needs to follow where defined on speed compatible table in section "Operating frequency", exceptional setting please confirm with NTC. CWL setting follow CL value in above table in section "Speed Bin"

## 2.4 tREFI

Average periodic Refresh interval (tREFI) of DDR4 SDRAM is defined as shown in the table.



**Table 23 : tREFI by device density**

| Refresh Mode | Parameter   |                      | 4 Gb          | Unit |
|--------------|-------------|----------------------|---------------|------|
|              | tREFI(base) |                      | 7.8           | us   |
| 1X mode      | tREFI1      | TCASE <= 85°C        | tREFI(base)   | us   |
|              |             | 85°C < TCASE <= 95°C | tREFI(base)/2 | us   |
|              | tRFC1(min)  |                      | 260           | ns   |
| 2X mode      | tREFI2      | TCASE <= 85°C        | tREFI(base)/2 | us   |
|              |             | 85°C < TCASE <= 95°C | tREFI(base)/4 | us   |
|              | tRFC2(min)  |                      | 160           | ns   |
| 4X mode      | tREFI4      | TCASE <= 85°C        | tREFI(base)/4 | us   |
|              |             | 85°C < TCASE <= 95°C | tREFI(base)/8 | us   |
|              | tRFC4(min)  |                      | 110           | ns   |

### 3. Package Drawing

### 3.1 96-ball FBGA

Solder ball: Lead free (Sn-Ag-Cu) unit:mm

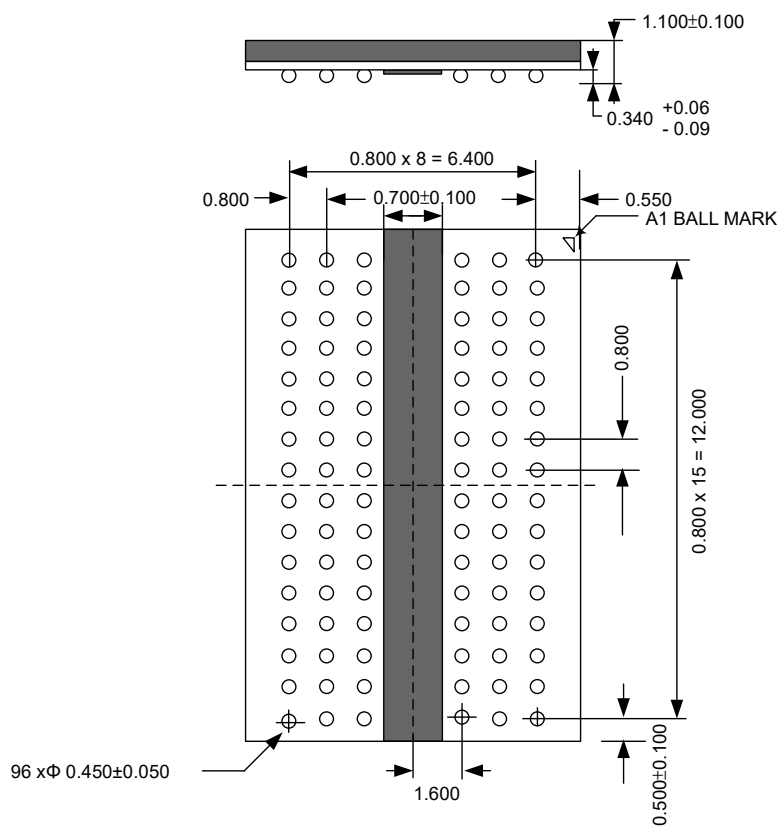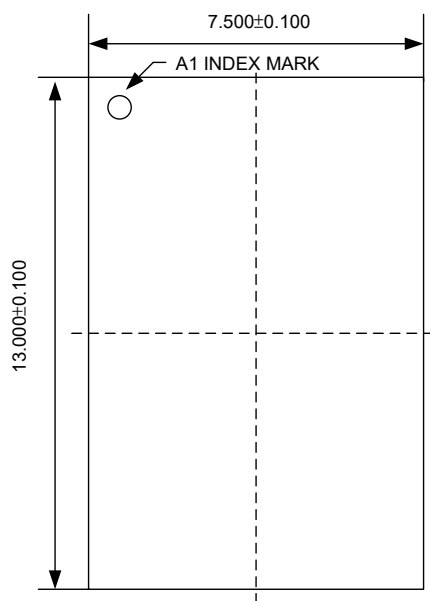

### ① PRECAUTION AGAINST ESD FOR MOS DEVICES

Exposing the MOS devices to a strong electric field can cause destruction of the gate oxide and ultimately degrade the MOS devices operation. Steps must be taken to stop generation of static electricity as much as possible, and quickly dissipate it, when once it has occurred. Environmental control must be adequate. When it is dry, humidifier should be used. It is recommended to avoid using insulators that easily build static electricity. MOS devices must be stored and transported in an anti-static container, static shielding bag or conductive material. All test and measurement tools including work bench and floor should be grounded. The operator should be grounded using wrist strap. MOS devices must not be touched with bare hands. Similar precautions need to be taken for PW boards with semiconductor MOS devices on it.

### ② HANDLING OF UNUSED INPUT PINS FOR CMOS DEVICES

No connection for CMOS devices input pins can be a cause of malfunction. If no connection is provided to the input pins, it is possible that an internal input level may be generated due to noise, etc., hence causing malfunction. CMOS devices behave differently than Bipolar or NMOS devices. Input levels of CMOS devices must be fixed high or low by using a pull-up or pull-down circuitry. Each unused pin should be connected to VDD or GND with a resistor, if it is considered to have a possibility of being an output pin. The unused pins must be handled in accordance with the related specifications.

### ③ STATUS BEFORE INITIALIZATION OF MOS DEVICES

Power-on does not necessarily define initial status of MOS devices. Production process of MOS does not define the initial operation status of the device. Immediately after the power source is turned ON, the MOS devices with reset function have not yet been initialized. Hence, power-on does not guarantee output pin levels, I/O settings or contents of registers. MOS devices are not initialized until the reset signal is received. Reset operation must be executed immediately after power-on for MOS devices having reset function.

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of Kingston Technology Company, Inc.

Kingston Technology Company, Inc. does not assume any liability for infringement of any intellectual property rights (including but not limited to patents, copyrights, and circuit layout licenses) of Kingston Technology Company, Inc. or third parties by or arising from the use of the products or information listed in this document. No license, express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of Kingston Technology Company, Inc. or others.

Descriptions of circuits, software and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software and information in the design of the customer's equipment shall be done under the full responsibility of the customer. Kingston Technology Company, Inc. assumes no responsibility for any losses incurred by customers or third parties arising from the use of these circuits, software and information.

#### [Product applications]

Be aware that this product is for use in typical electronic equipment for general-purpose applications. Kingston Technology Company, Inc. makes every attempt to ensure that its products are of high quality and reliability. However, this product is not intended for use in the product in aerospace, aeronautics, nuclear power, combustion control, transportation, traffic, safety equipment, medical equipment for life support, or other such application in which especially high quality and reliability is demanded or where its failure or malfunction may directly threaten human life or cause risk of bodily injury. Customers are instructed to contact Kingston Technology Company's sales office before using this product for such applications.

#### [Product usage]

Design your application so that the product is used within the ranges and conditions guaranteed by Kingston Technology Company, Inc., including the maximum ratings, operating supply voltage range, heat radiation characteristics, installation conditions and other related characteristics. Kingston Technology Company, Inc. bears no responsibility for failure or damage when the product is used beyond the guaranteed ranges and conditions. Even within the guaranteed ranges and conditions, consider normally foreseeable failure rates or failure modes in semiconductor devices and employ systemic measures such as fail-safes, so that the equipment incorporating Kingston Technology Company, Inc. products does not cause bodily injury, fire or other consequential damage due to the operation of the Kingston Technology Company, Inc. product.

#### [Usage environment]

Usage in environments with special characteristics as listed below was not considered in the design. Accordingly, our company assumes no responsibility for loss of a customer or a third party when used in environments with the special characteristics listed below.

#### Example:

- 1) Usage in liquids, including water, oils, chemicals and organic solvents.
- 2) Usage in exposure to direct sunlight or the outdoors, or in dusty places.
- 3) Usage involving exposure to significant amounts of corrosive gas, including sea air, CL<sub>2</sub>, H<sub>2</sub>S, NH<sub>3</sub>, SO<sub>2</sub>, and NO<sub>x</sub>.
- 4) Usage in environments with static electricity, or strong electromagnetic waves or radiation.
- 5) Usage in places where dew forms.
- 6) Usage in environments with mechanical vibration, impact, or stress.
- 7) Usage near heating elements, igniters, or flammable items.

If you export the products or technology described in this document that are controlled by the Foreign Exchange and Foreign Trade Law of Taiwan, you must follow the necessary procedures in accordance with the relevant laws and regulations of Taiwan. Also, if you export products/technology controlled by U.S. export control regulations, or another country's export control laws or regulations, you must follow the necessary procedures in accordance with such laws or regulations.

If these products/technology are sold, leased, or transferred to a third party, or a third party is granted license to use these products, that third party must be made aware that they are responsible for compliance with the relevant laws and regulations.

## Contact Kingston



For more information, visit us at: <https://www.kingston.com/en/solutions/embedded-and-industrial>

For direct support, please contact us at: <https://www.kingston.com/en/form/embedded>

For quick questions, please email us at: [emmc@kingston.com](mailto:emmc@kingston.com)