


NSC1000-LT

1 Ton Air Cooled Deep Freeze Chiller

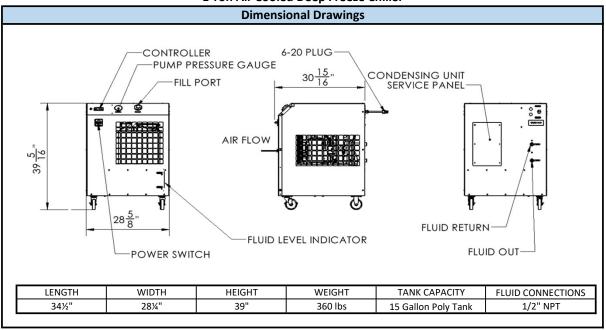

Chiller Performance Cooling Capacity Pump Performance 12000 60 10000 50 8000 Capacity (BTU/hr) 40 Head (PSI) 6000 30 4000 20 2000 0 25 35 Fluid Outlet Temperature (F) 1 Fluid Flow (GPM)

North Slope Chillers 3130 South 1030 West, Suite 1 Salt Lake City, UT 84119 (866) 826-2993 www.NorthSlopeChillers.com All Information Is For Reference Only









NSC1000-LT

Standard Features and Benefits						
Performance	Working Temperature Range	10°F(-12°C) to 45°F(7°C)				
	Temperature Stability	±2				
	Cooling Capacity @ 70°F	70°F Ambient				
		10°F (-12.2°C) - 5,700 BTU/hr (1,670 Watts)				
		27.5°F (-2.5°C) - 8,000 BTU/hr (2,340 Watts)				
	Ambient Temperature (Standard)	40°F - 100°F				
	Pump Performance	0 GPM @ 50 PSI				
		2 GPM @ 25 PSI				
		4 GPM @ 0 PSI				
User Interface	Controls	Electronic Programmed Temperature Controller with Constant (Setpoint & Process)				
		Temperature Readout				
	Additional Features	Fluid Level Indicator, Pump Pressure Gauge				
Refrigeration Circuit	Compressor	Copeland Scroll				
	Heat Exchanger	Brazed Plate Heat Exchanger				
	Refrigerant	R404a				
	Additional Features	Access Ports, Service Valves, Filter Drier, Sight Glass, Liquid Receiver, Thermostatic Expansion Valve (TXV)				
	Max Heat Rejection	18,300 BTU/hr (5.4 kW)				
Process Fluid Circuit	Pump	Continuous Duty, 1/3 HP Fixed Displacement Pump With Bypass				
	Inlet/Outlet	1/2" NPT				
	Reservoir	15 Gallon Poly Tank				
	Additional Features	Inline Strainer, Process Fluid Temperature Sensor, Pump Discharge Pressure Gauge				
Construction	Frame	Galvanized Steel				
	Enclosure	Powder Coated Steel Enclosure with Easy Access Panels				
	Warranty	1 Year Standard Warranty				
Quality	UL/CSA Certified (Full Assembly)	ETL 3170655, UL STD 1994, CAN/CSA STD, C22.2 No. 236				
	Manufacturing	Manufactured in the U.S.A. Certified ISO 9001:2015 Company				
Power	Available Voltages	Max Amps	Recommended Breaker/Service			
		(FLA)	(MCA)			
	208-240VAC / 1P / 60Hz (STANDARD)	15.4 Amps (std)	19.4 Amps (std)			
	208-240VAC / 3P / 60Hz	14 Amps	20 Amps			
	480VAC / 3P / 60Hz	6 Amps	15 Amps			

Optional Upgrades					
UPGRADES	Anti-Backflow Process Heating Pass-through	External Temperature Monitoring Alternate Pumps	Controllers		
	More Options and Customization Available - Contact Factory for More Information				

North Slope Chillers

3130 South 1030 West, Suite 1 Salt Lake City, UT 84119 (866) 826-2993 www.NorthSlopeChillers.com All Information Is For Reference Only





