

INSULATOR:
LIQUID CRYSTAL POLYMER (LCP) PER ASTM
D5138

ORGANIZER BLOCK:
LIQUID CRYSTAL POLYMER (LCP) PER ASTM
D5138

CONTACT:
BERYLLIUM COPPER PER ASTM B194,
C17200, GOLD PLATED PER ASTM B488
(HARD GOLD) TYPE II CODE C CLASS 1.27

TERMINATION:
SOLDER COATED WITH SN63A PER J-STD-006 OR AMS-P-81728

CURRENT CAPACITY:
3 AMP MAX PER MIL-DTL-83513

CONTACT RESISTANCE:
26 MILLIOHMS (65 mV) MAX @ 2.5 AMPS
PER MIL-DTL-83513



PERFORMANCE:
PRODUCT FAMILY TESTED TO AND PASSED
THE PERFORMANCE SPECIFICATIONS OF
TABLE VII OF MIL-DTL-83513



△ 1 MATING FACE OF
CONNECTOR TO BE
FREE OF EPOXY

△ 2 TAIL DIMENSIONS APPLY
AT PLANE A

DIMENSIONS IN [] ARE IN
MILLIMETERS UNLESS
OTHERWISE NOTED AND ARE
FOR REFERENCE ONLY

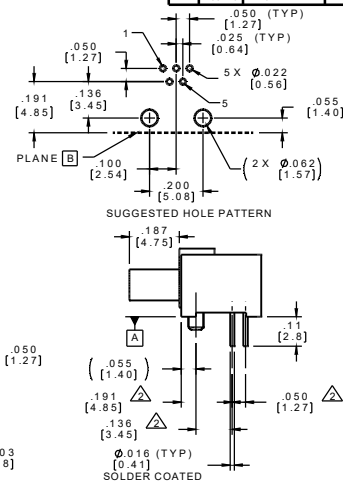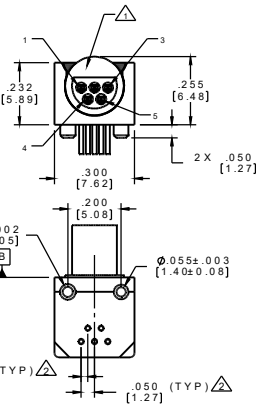

PART NO.	A22052-002	REV	ECO	DATE	APPROVED
		D	100726	07-17-14	TLS

THIRD ANGLE TOLERANCES		THE DRAWING GOVERNS CONVENTIONAL AND PROPRIETARY INFORMATION SHOWN ON THE PROPERTY OF UNITED CONNECTOR CORP. THIS DOCUMENT MAY NOT BE LOANED OR PART BE REPLICATED OR REPRODUCED IN ANY MANNER WITHOUT THE PERMISSION FROM UNITED CONNECTOR CORP.		QWENETICS CONNECTOR CORPORATION 7266 COMMERCIAL CIRCLE EAST MINNEAPOLIS, MN 55432 WWW.QWENETICS.COM		CAGE CODE 6187 DWG NO. A22052-002	
2 PLD C: 01 3 PLD C: 005 1 PLD C: 005 1 PLD C: 005 1 PLD C: 005	DFTM. DNB 01-28-10	TITLE () PIN MALE MICRO CIRCULAR RA CONNECTOR	SHEET 1 OF 1 SCALE 3:1		REVISIONS		