
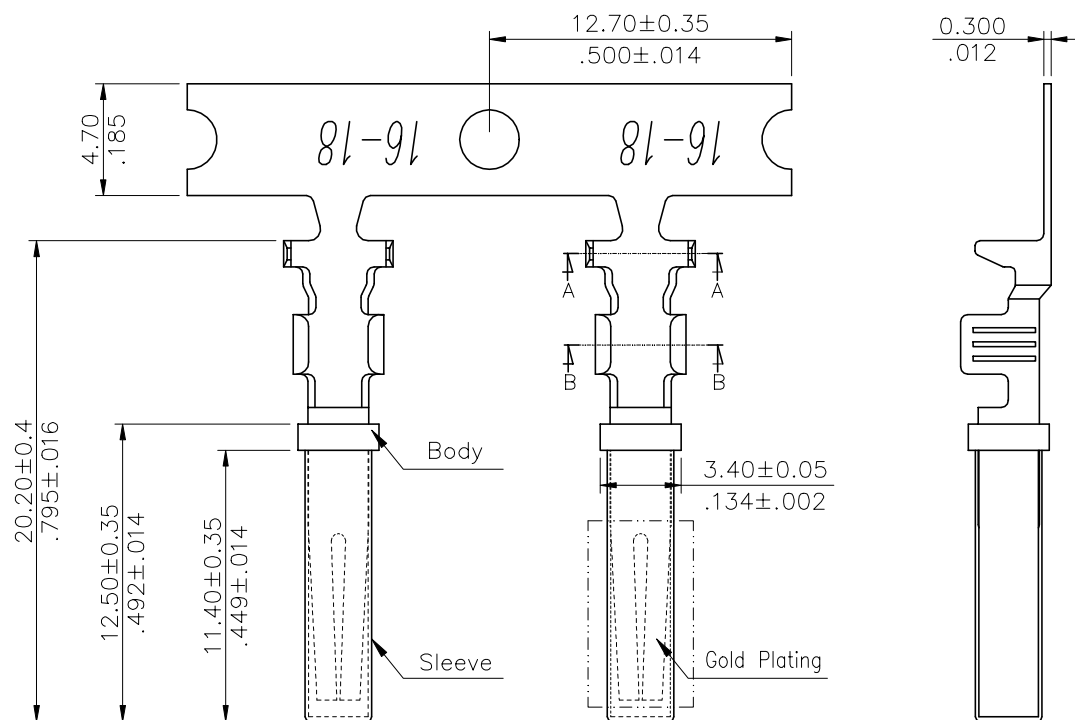


SEC: A-A



SEC: B-B

Note:

* Material:

Body: Phosphor Bronze (C5191)

Sleeve: Stainless steel (SUS304)

Wire Range	Insulation Diameter	Reel Q'ty
AWG #16~#18	1.02~1.29 (.040~.051)	4,000 PCS.

Ordering Code:

CPT1 T04 A P E S
① ② ③ ④ ⑤ ⑥

① Series No.

② Type: T04= AWG #16~ #18


③ Plating:

A= 2~3μ" Gold plated over 2~3μ" Nickel

④ Material: P= Phosphor Bronze

⑤ Plating method: P= Post Plating

⑥ Option: S= Receptable Type

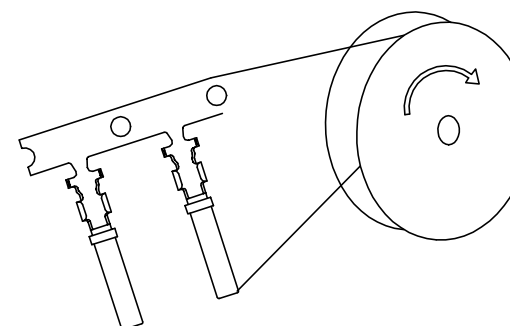

Unwind direction

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: WIRE TO WIRE CONNECTOR RECEP. TERMINAL	 瀚荃股份有限公司 CviLux Corporation			
3				DRAWN BY: Sun	3/15-24'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:				
2				ENGINEER: Sun	3/15-24'	.X ± 0.30/.012 X' ± 3"	CUSTOMER:	DRAWING NO.	CPT125S1	PART NO.	CPT1T04APPS
1				CHECKED BY: Eisley	3/15-24'	.XX ± 0.20/.008 X' ±		SCALE	3 / 1	SHEET	1 OF 1
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	3/15-24'	.XXX ± 0.10/.004 XX' ±					